

BRES7V0L1B2ZP



!"#\$%&'()*+,-./:;<=>?@A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` { | } ~ # DATA SHEET

#

版	
---	--

BRES7V0L1B2ZP

!"#\$%&'()*+,-./:;<=;>?@ABCD EFGHIJKLMNOPQRSTUVWXYZ[\]^_`{|}~ DATA SHEET



# =?4?7 , 4#	# GY736#	# ?,&B#	# W& ,#
= ?A#=%2 #=60 4Q,-#X#U/()V2R#	=_ ^#	IU#	_#



Definitions of electrical characteristics


=?4?7 , 4#

BRES7V0L1B2ZP

#

/ Electrical Characteristic Curve(Ta=25)

#

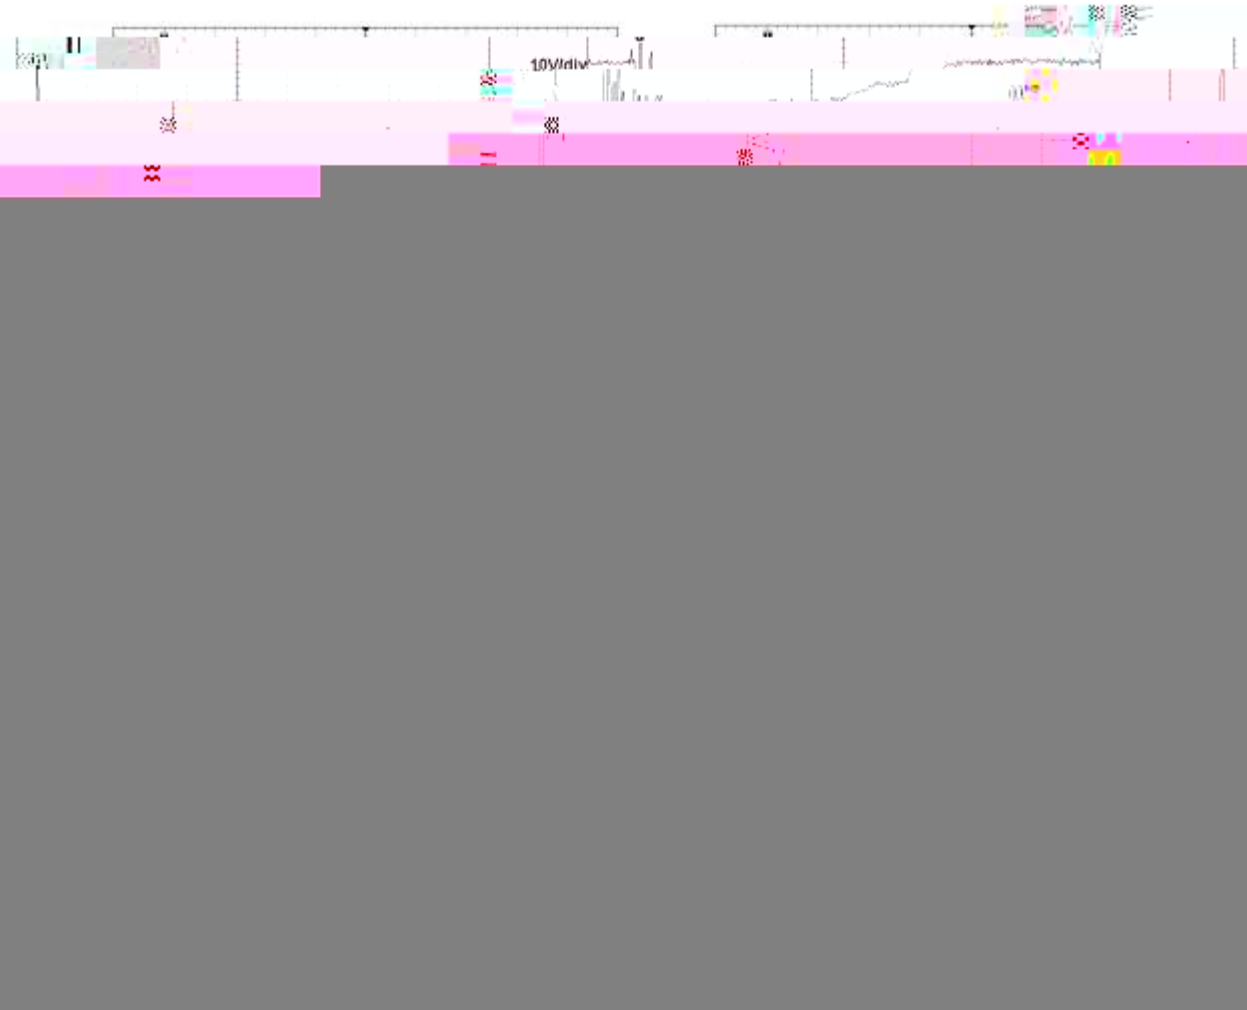

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#


#



#

/ Package Dimensions

#

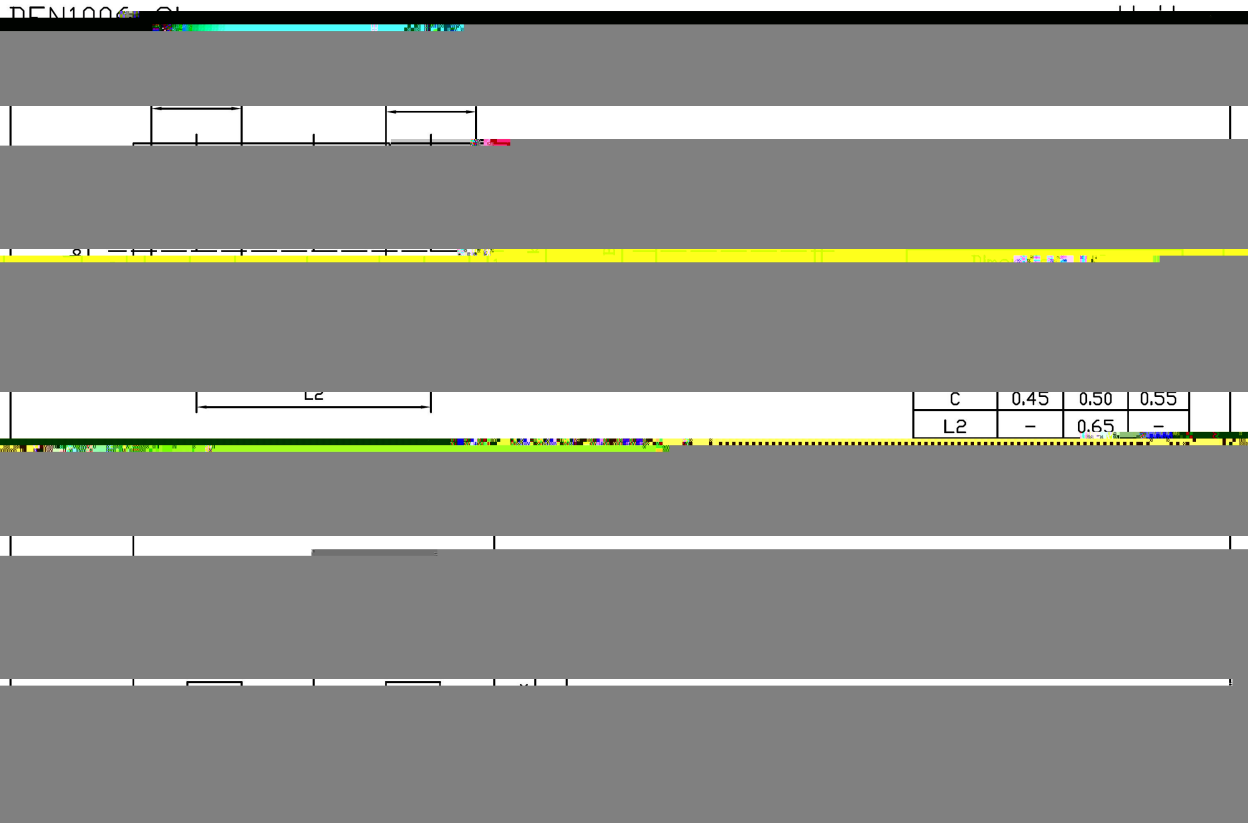


BRES7V0L1B2ZP



!"#\$%&'()*+,-./:;<=;>?@A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` { | } ~ DATA SHEET

#





#

() /

: 6, .#
* *T) *U) ;) e) 2 5f# # # *!=4 + ? ,&B.*T) `\*U)°C#M 7 . ; ) `e) 2 5!#
((PT±T°C T±)!T2 5f# # (!= ?A#M 7 -!. (PT±T°C#8%4? ,&6&.T±)!T2 5!#
S (*)°C/2 5!# # # # S! O66%&B#G- E.#(`*)°C/2 5!#
#

/ Resistance to Soldering Heat Test Conditions

#

(;) ±T°C# # *) ± *#2 5!# # # M 7 -!. (;) HT°C# # M 7 . *) H*#2 5#
#