


/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_N	V_{GS}	D_H
	d		
	d		


/ Electrical Characteristics(Ta=25)

V_{DS}	I_N	f_{sw}	$\omega_{n\theta}$	$\varepsilon_{3\theta}$	$\omega_{z\theta}$	D_H
		ε				
						ε
		ε				
						q
		q				

/ Package Dimensions

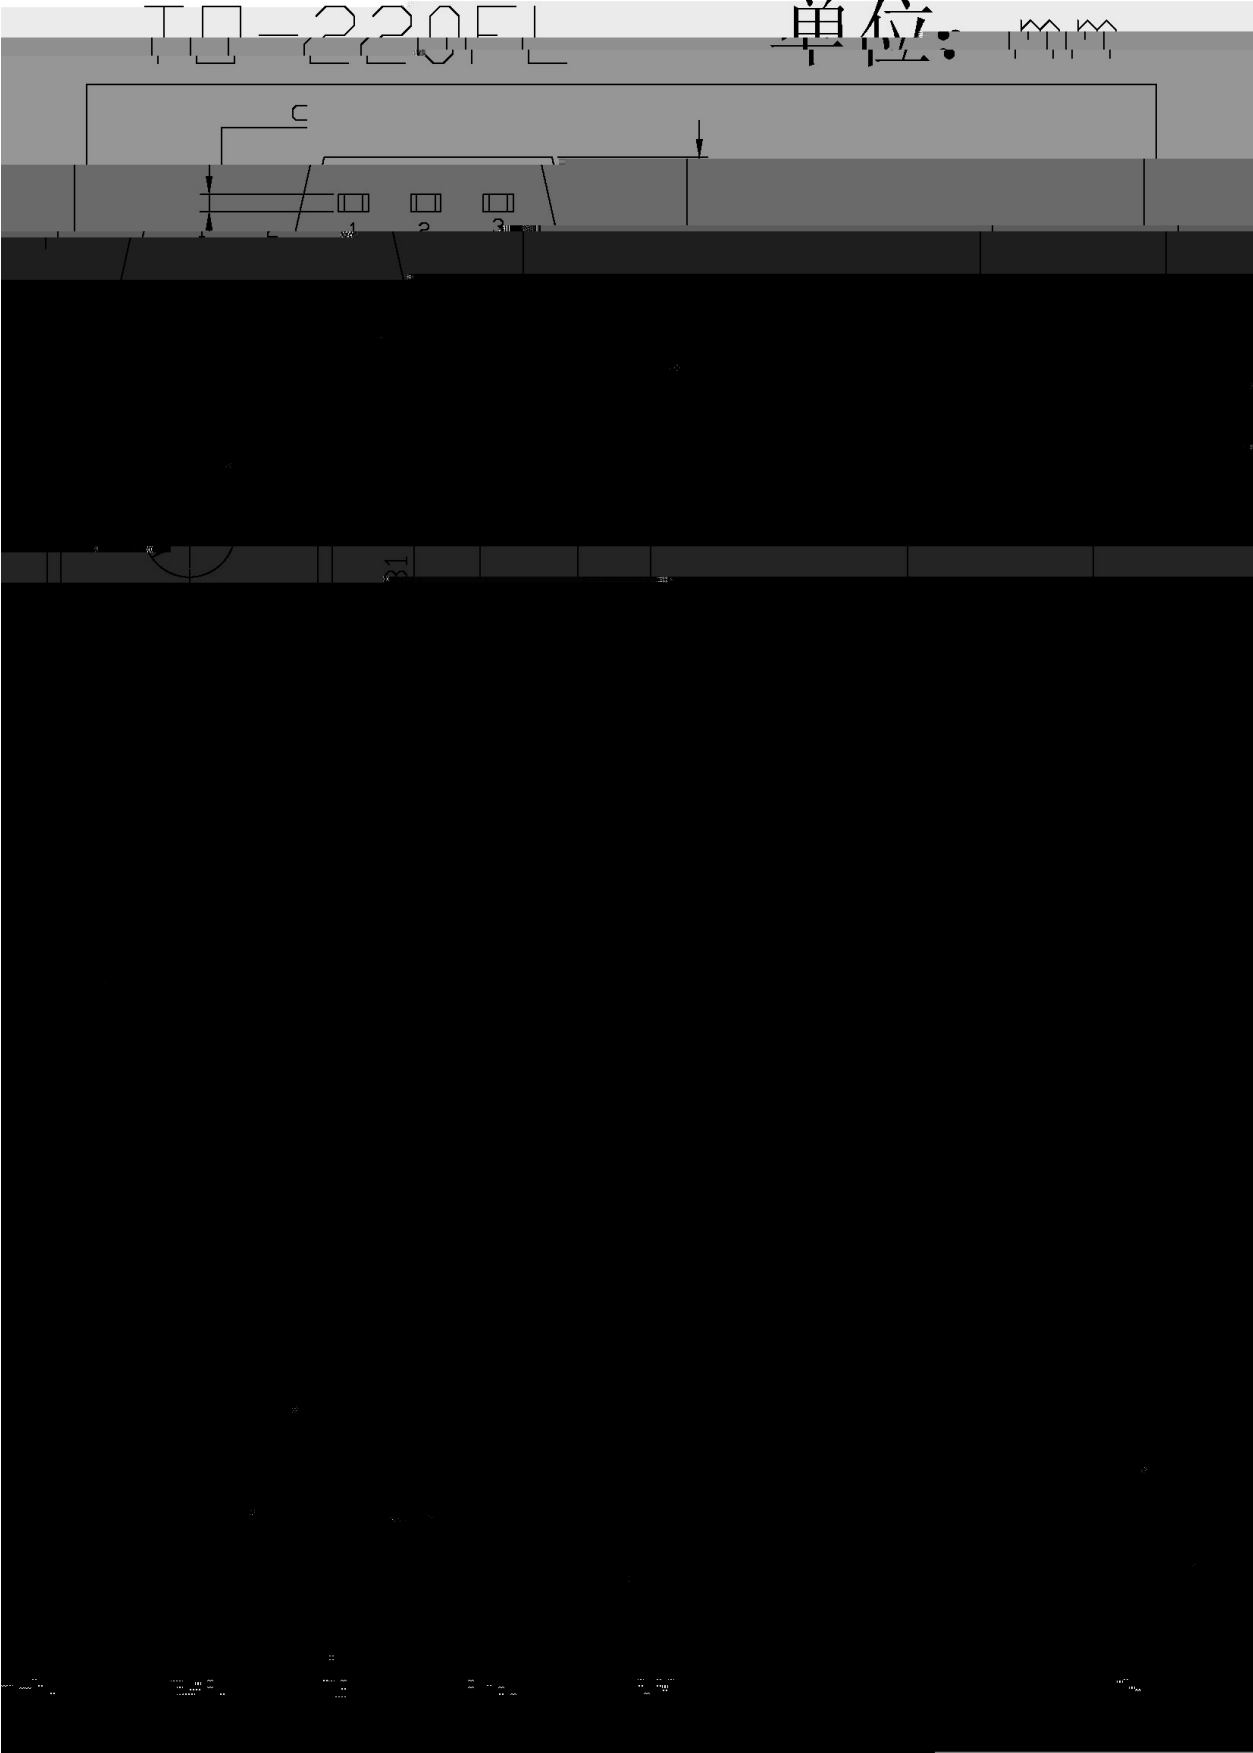


/ Marking Instructions

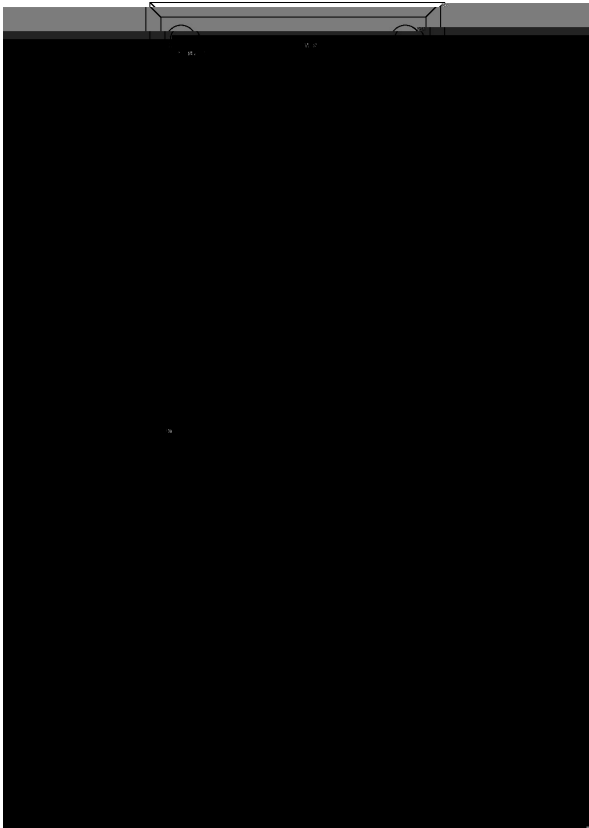

—X	
EU X	—X
45Q98 X	—X
—X	—X —X —X —X —X

() / Temperature Profile for Dip Soldering(Pb-Free)

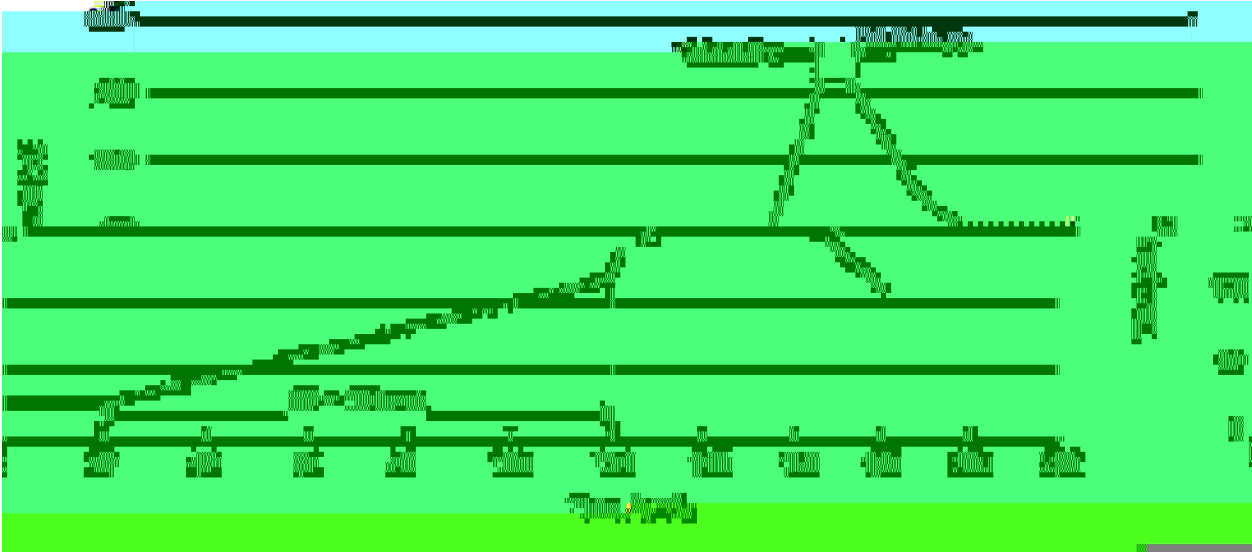

℃ ×
150℃ × 100s 235℃ ×
25℃ × ° 150℃ × 100s 235℃ × °