

Rev.B Sep.-2025

TO-220FL N 650V



N-CHANNEL 650V Super-Junction Power MOSFET in a TO-220FL Plastic Package.

$R_{DS(on)} \times Q_g$ 100%

ROHS

Very low $R_{DS(on)} \times Q_g$, 100% avalanche tested, RoHS compliant.

For switch mode power supply, uninterruptible power supply, power factor correction.



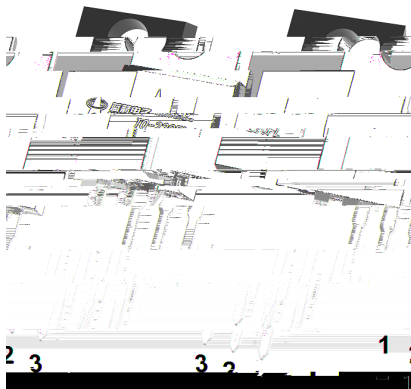





PIN1 G


PIN 2 D


PIN 3 S

See Marking Instructions.

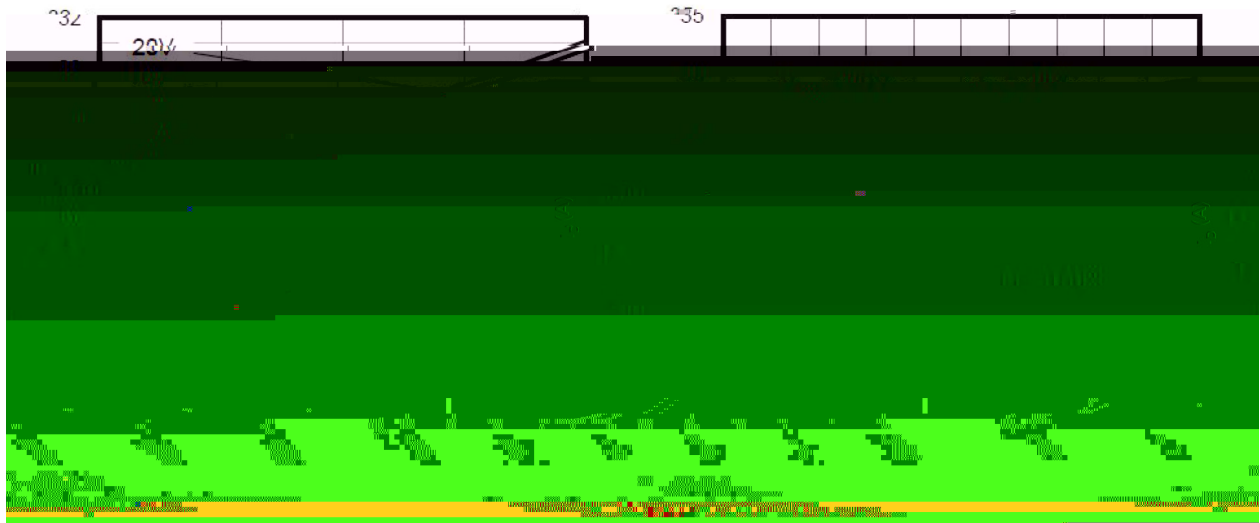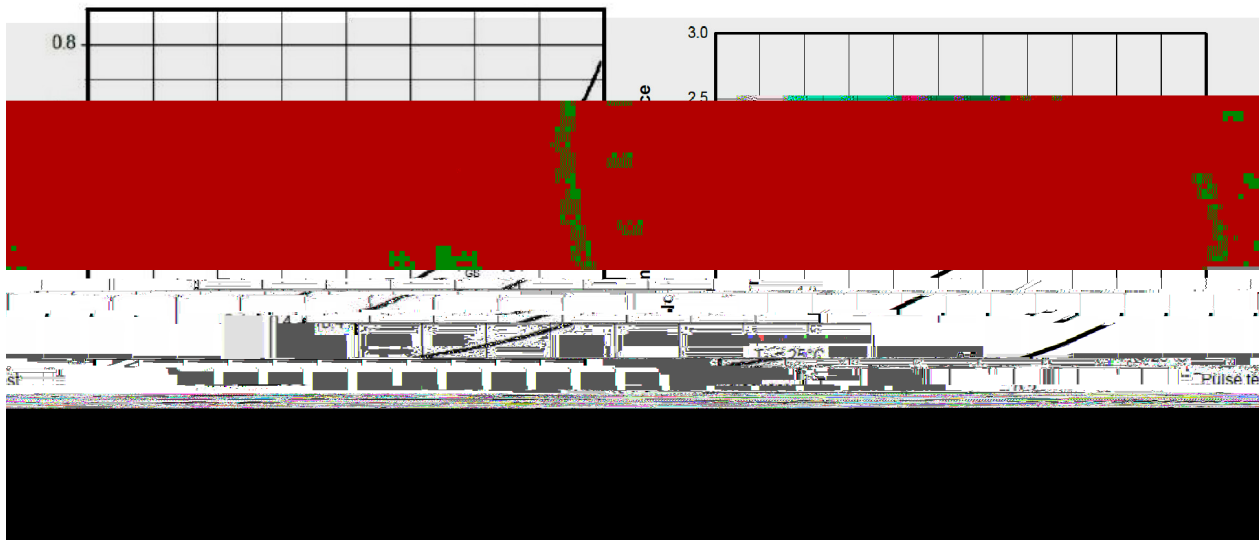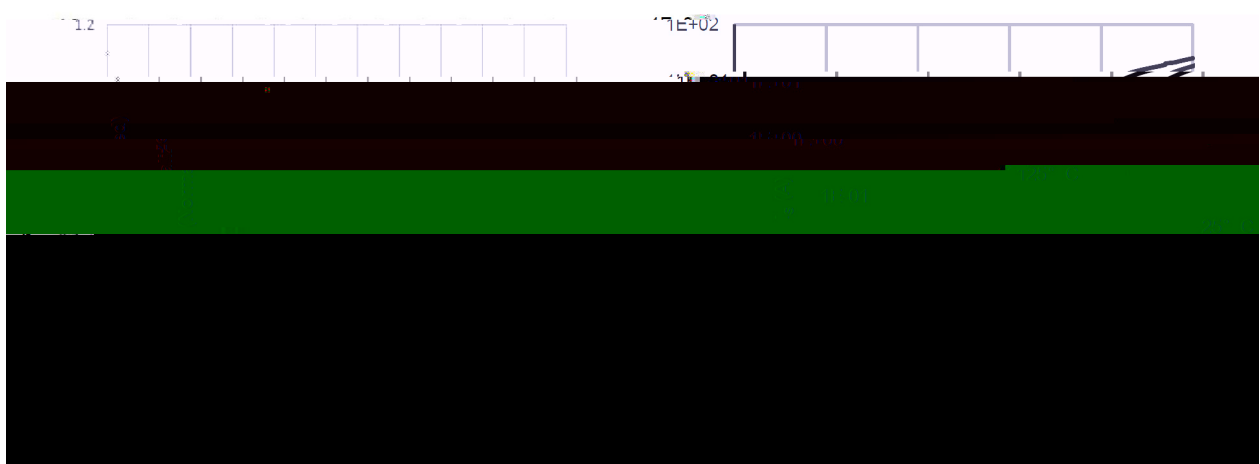

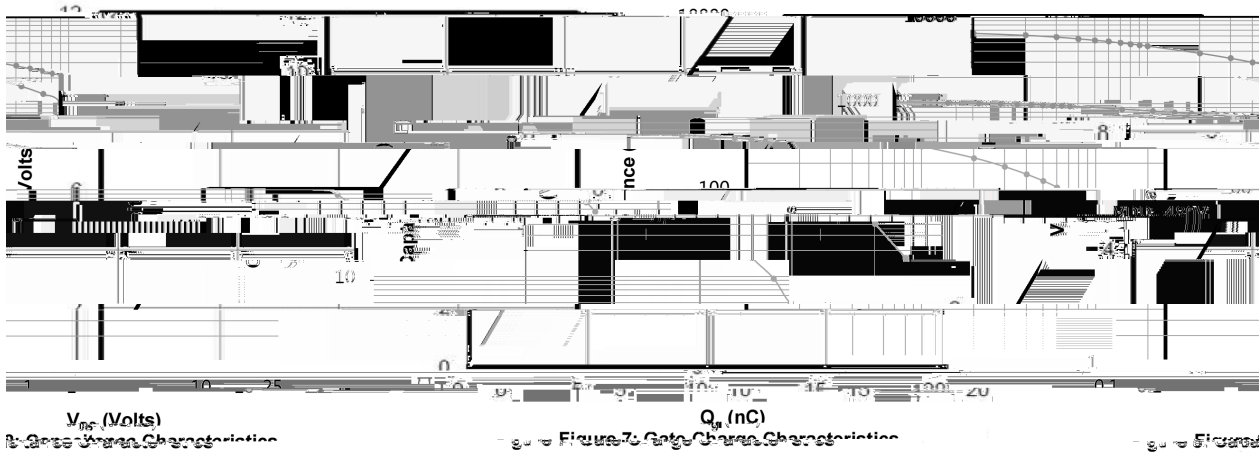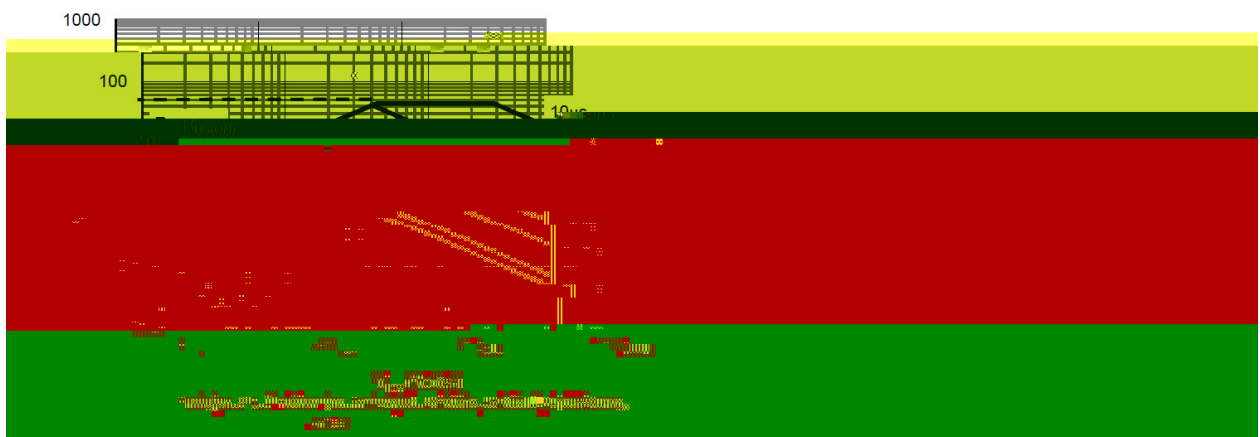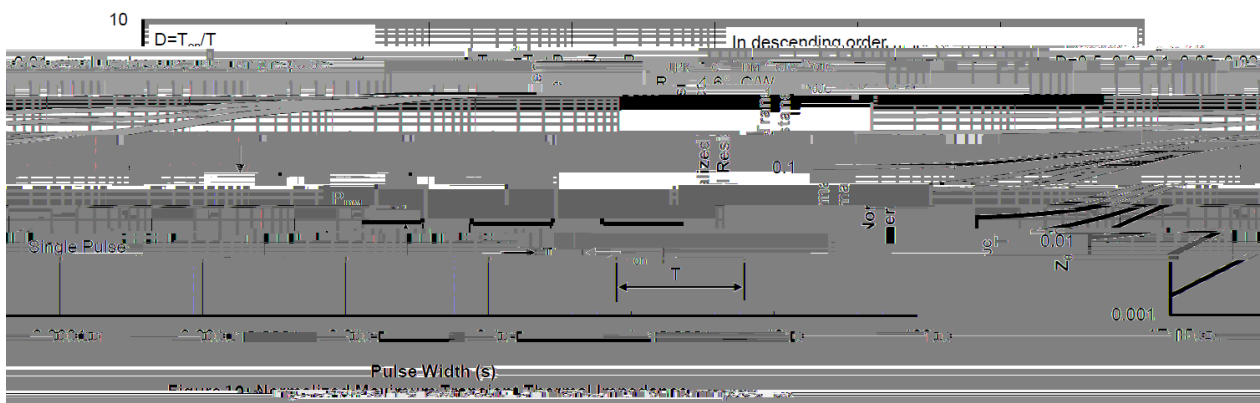

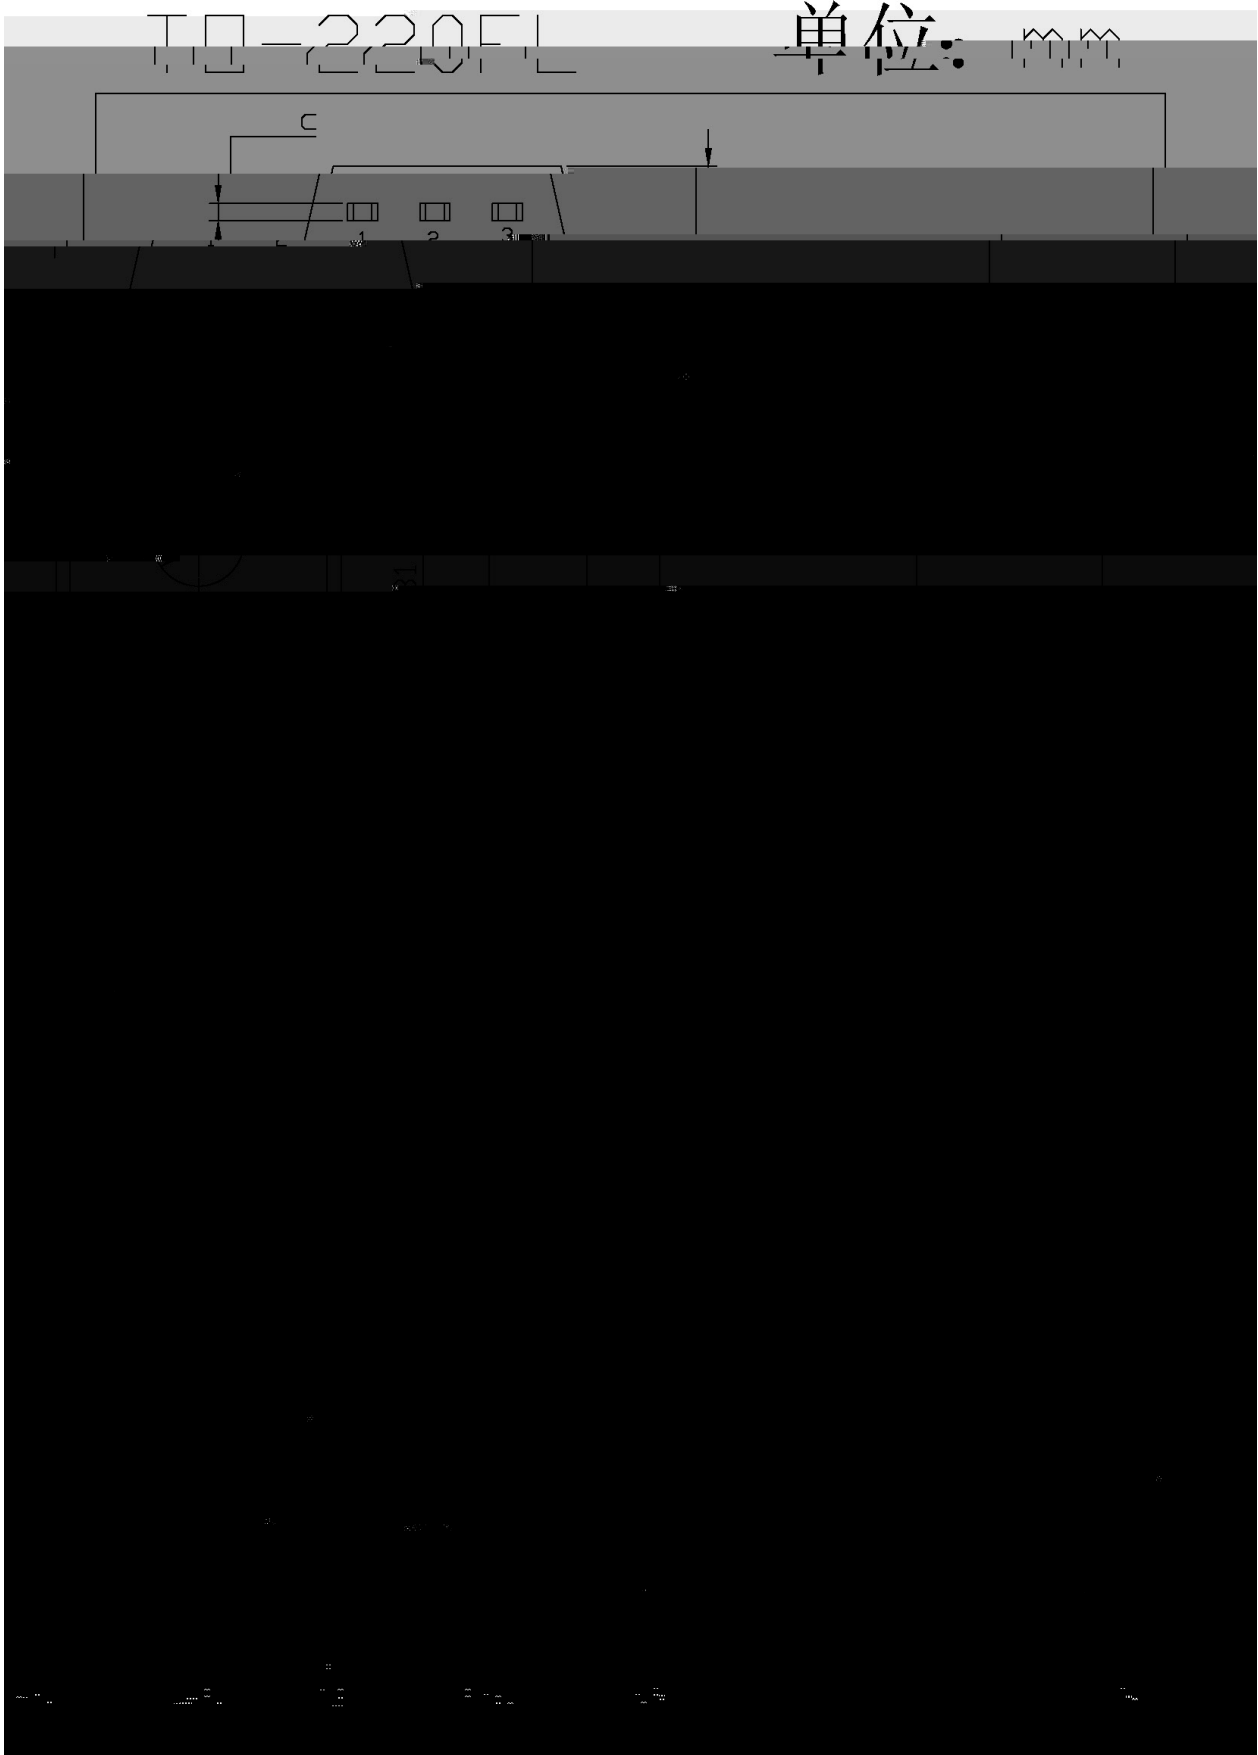

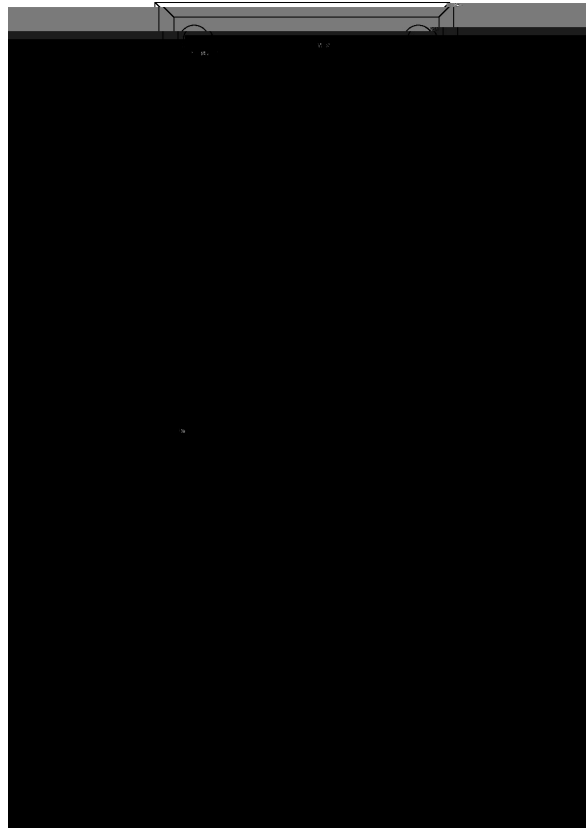

Note:

- | | | | |
|---|--------|-----------|---|
| 1 | 25 150 | 60 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ TUBE