


BRI4N65
Rev.E Aug.-2017


TO-251 N

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	650	V
Drain Current	$I_D(T_C=25^\circ\text{C})$	4.0	A
Drain Current	$I_D(T_C=100^\circ\text{C})$	2.5	A
Drain Current - Pulsed	I_{DM}	16	A
Gate-Source Voltage	V_{GS}	± 20	V
Single Pulsed Avalanche Energy	E_{AS}	240	mJ
Repetitive Avalanche Energy	E_{AR}	10	mJ
Avalanche Current	I_{AR}	4.0	A
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	33	W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to 150	


/ Electrical Characteristic Curve

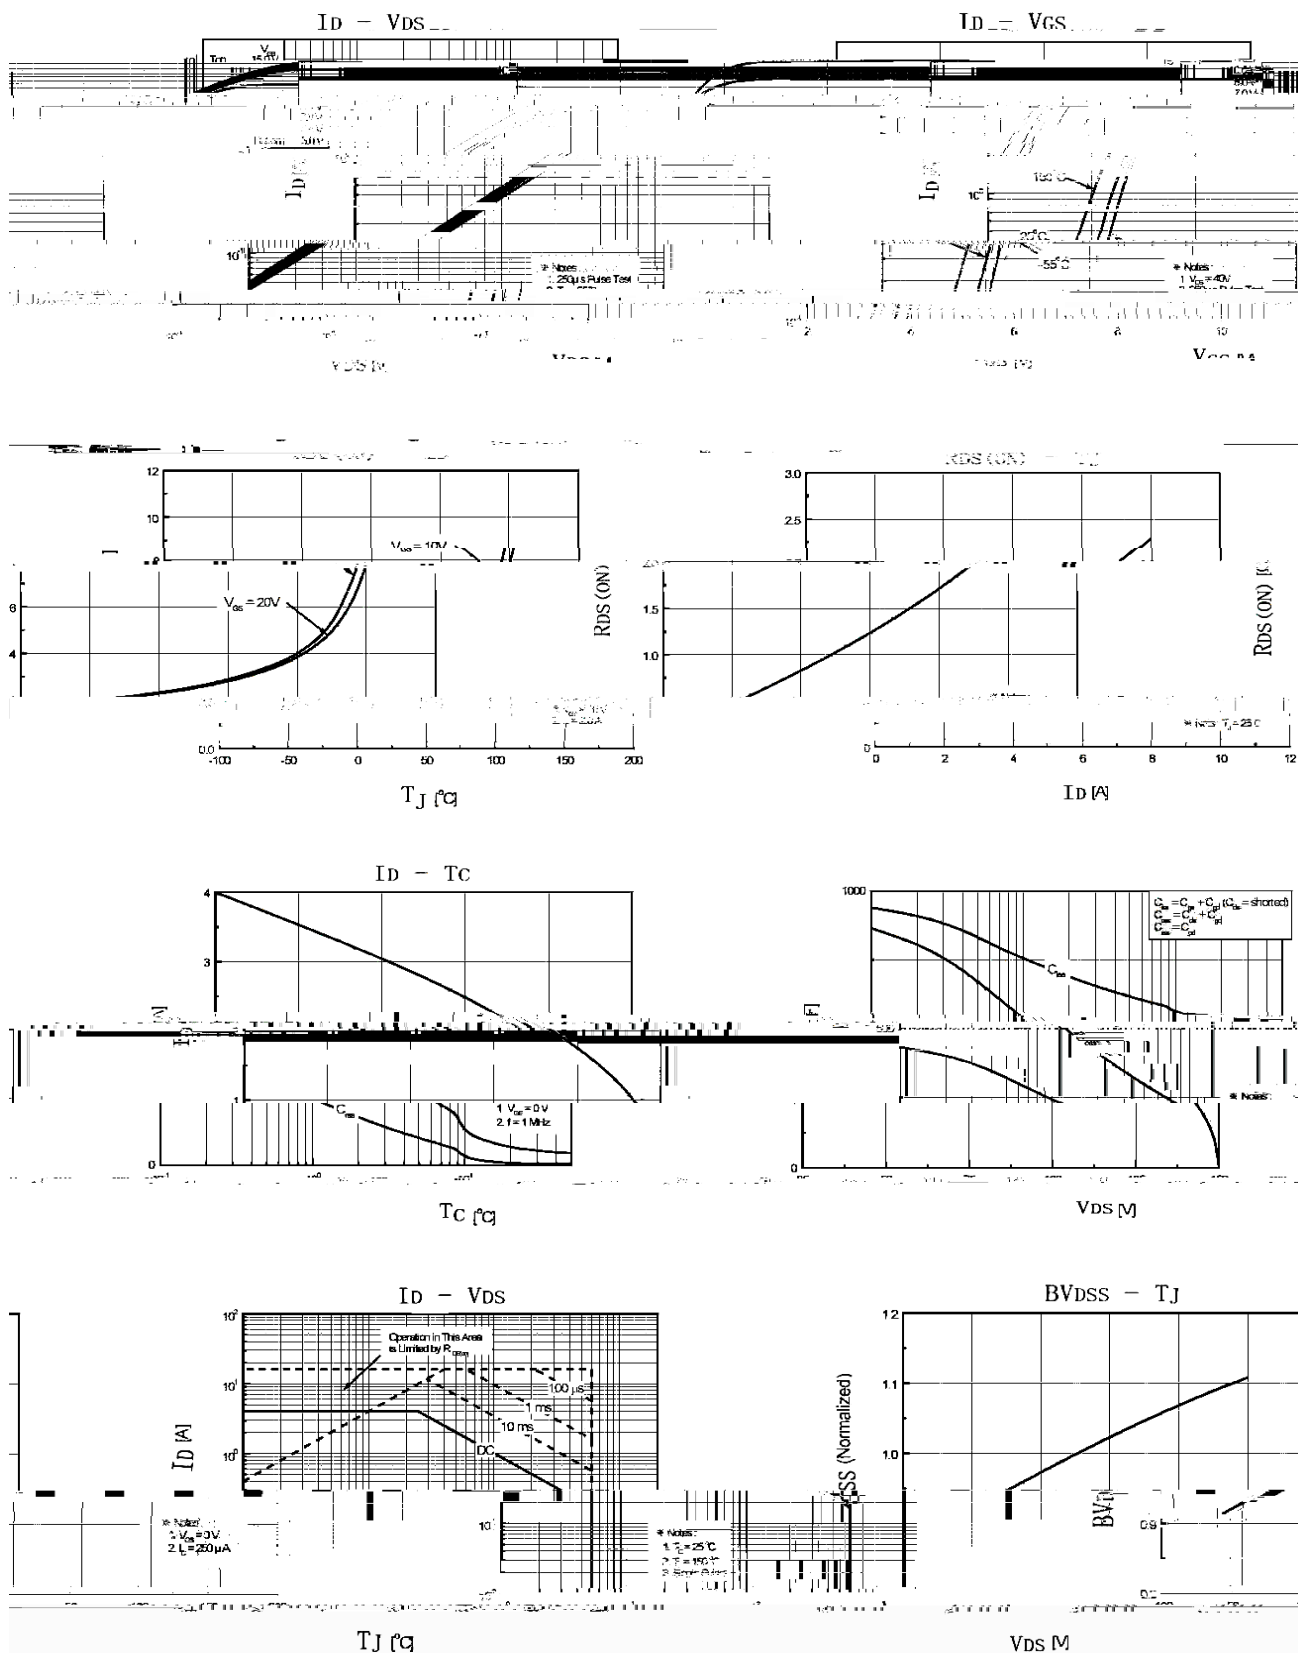

/ Package Dimensions

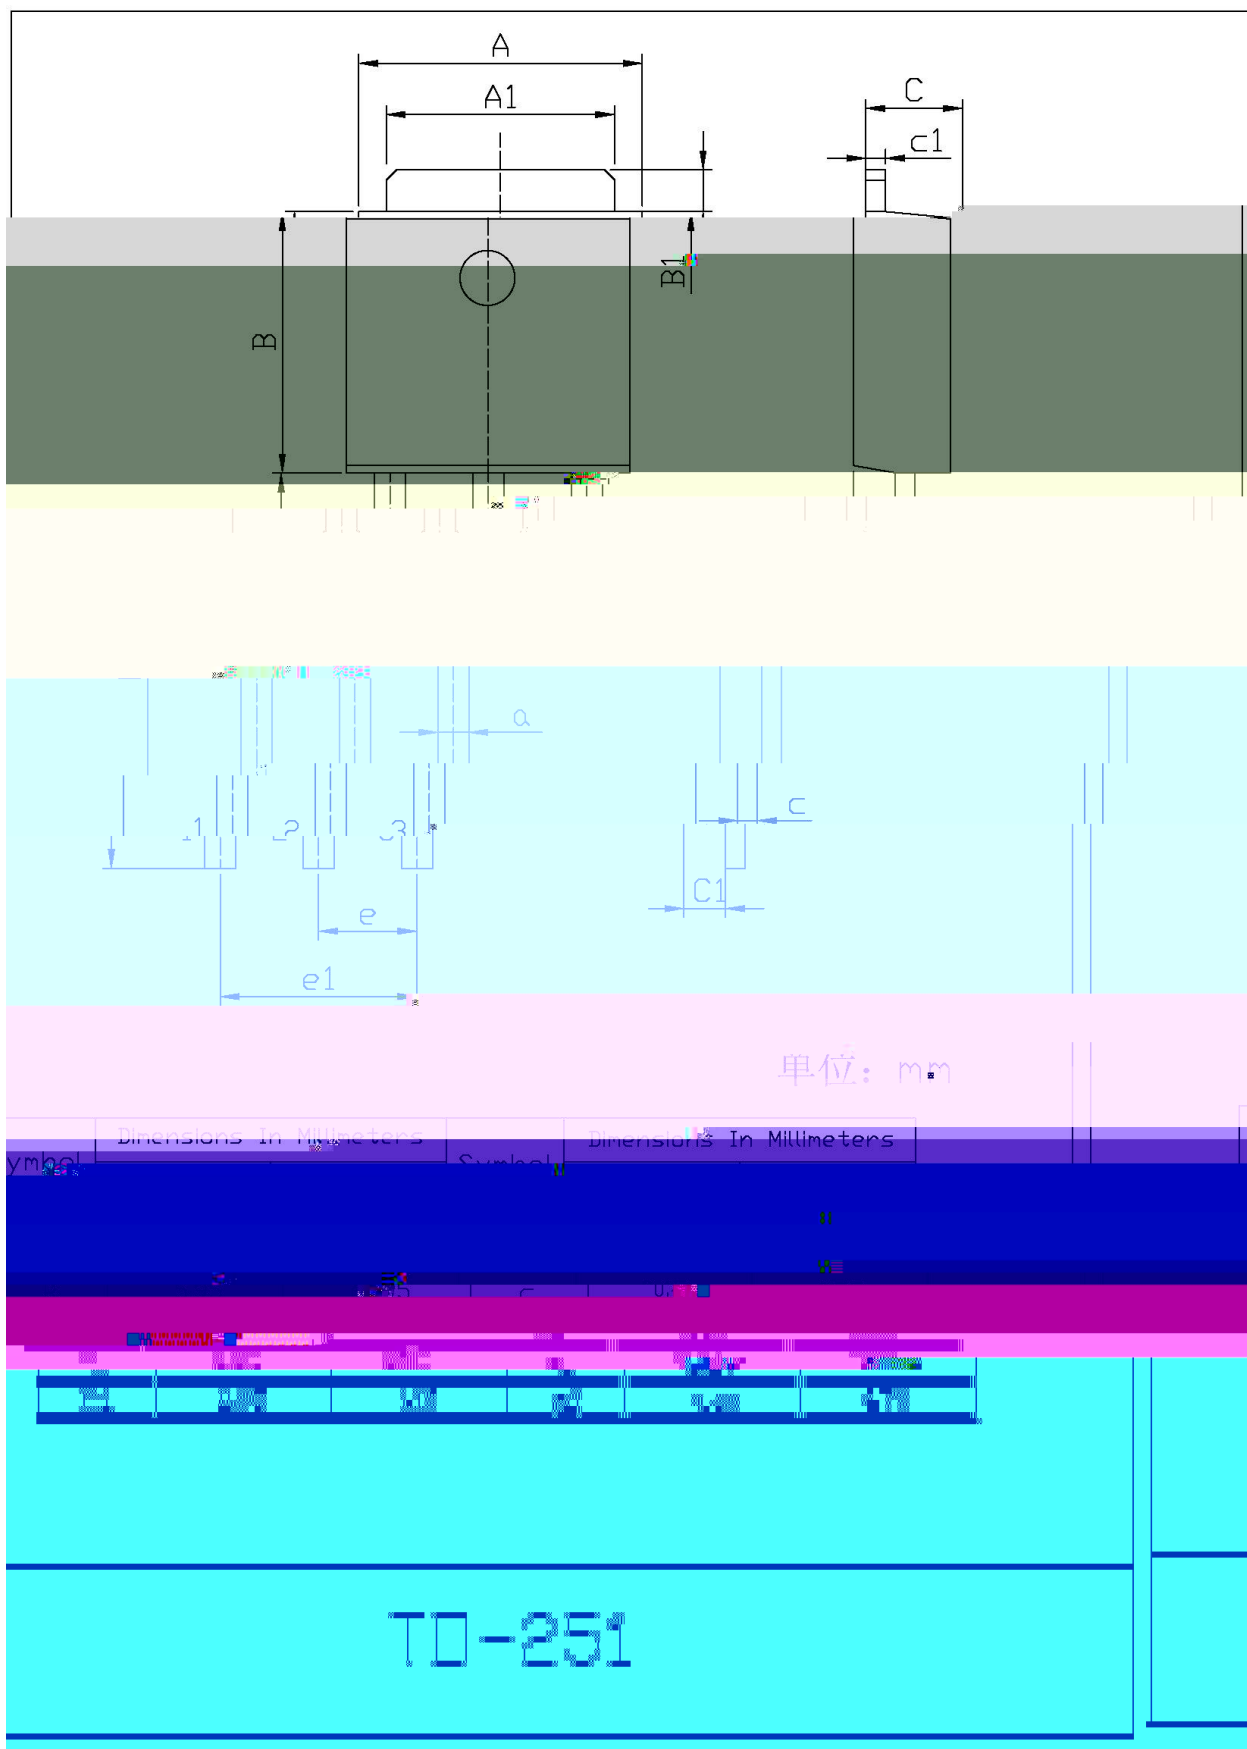

/ Marking Instructions

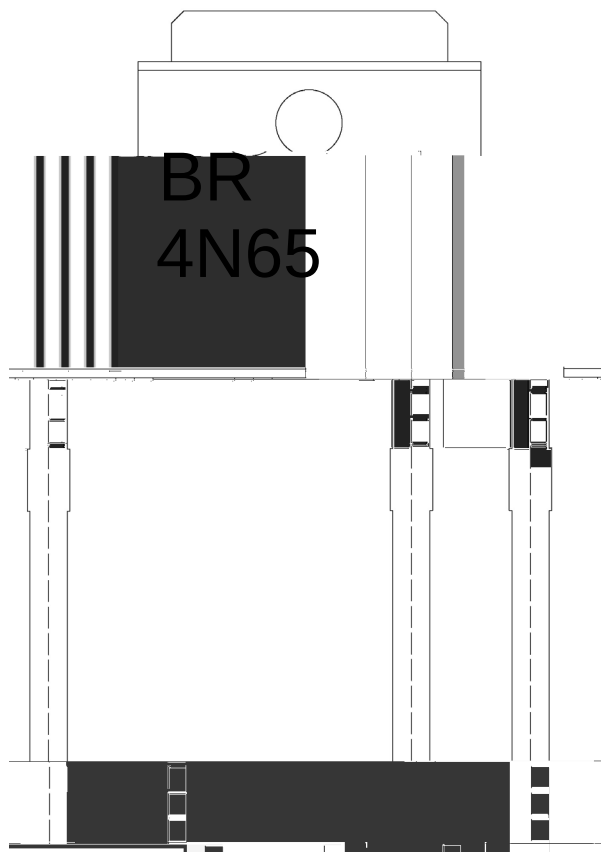

BR


Note:

BR: Company Code

4N65: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

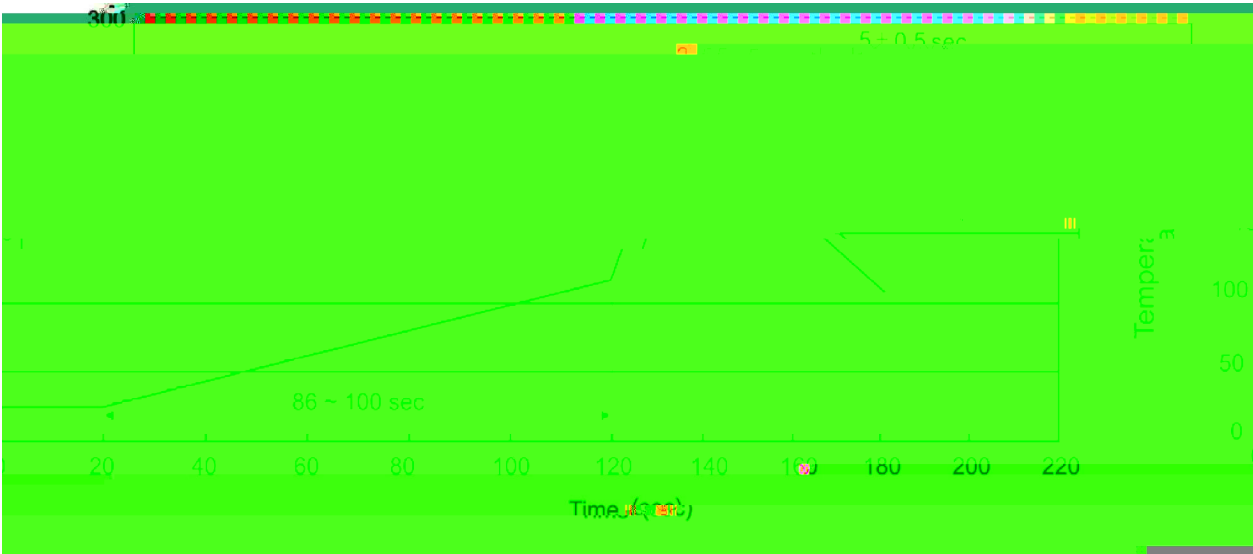

Note:

- 1

25 150

60 90sec;
- 2

255 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

270 5

10 1 sec.

Temp.:270±5

Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm ³)

/ TUBE

Package Type

Units

Dimension

(unit