
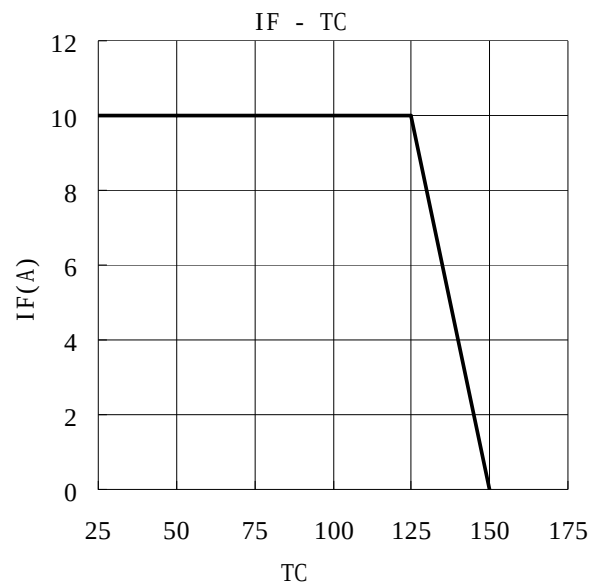


BRMBR10150CTAA


Rev.A Nov.-2017


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	150	V

/ Electrical Characteristic Curve

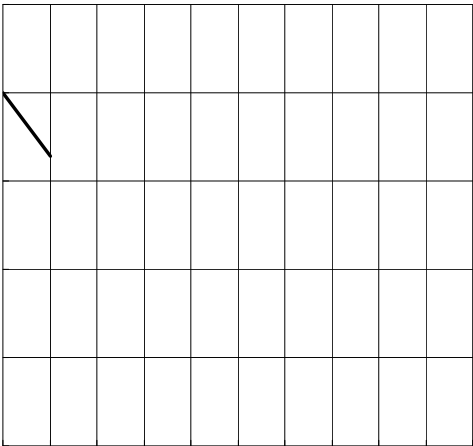

/ Marking Instructions

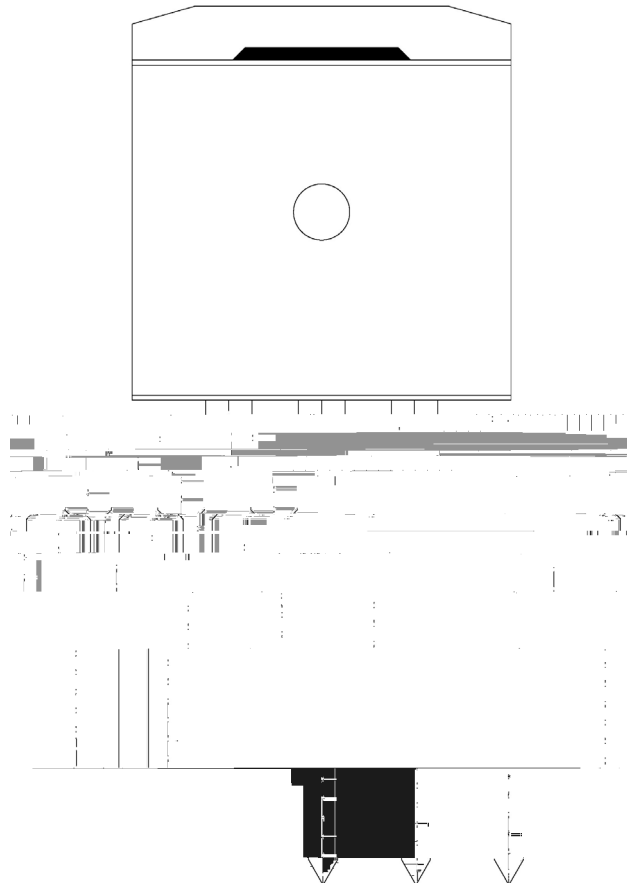

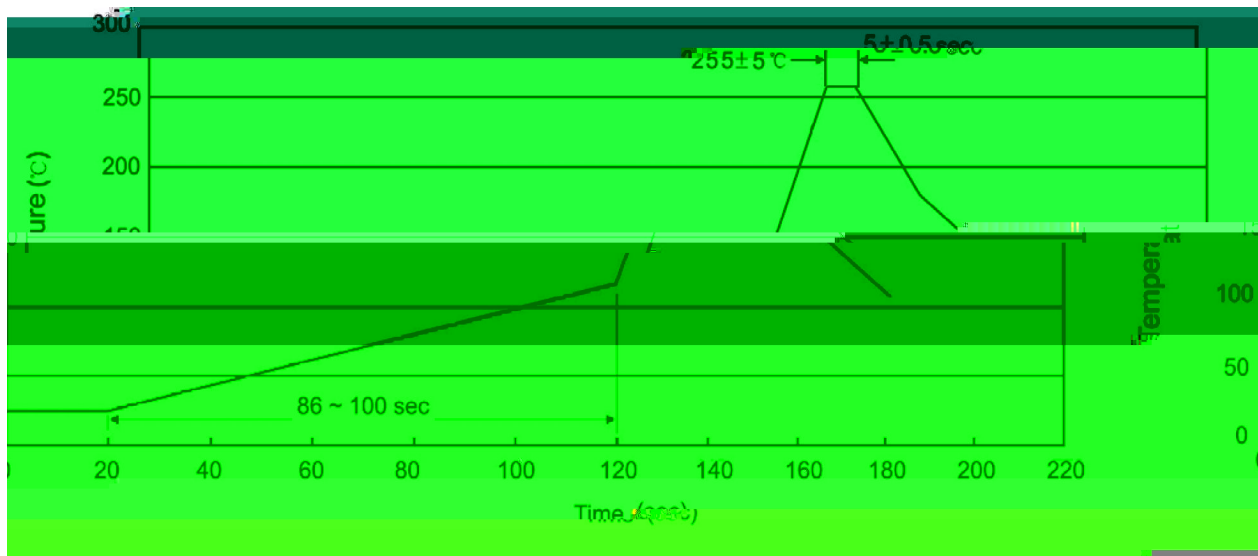
() / Temperature Profile for Dip Soldering(Pb-Free)


℃

1. 25~150℃, Time: 60~90sec;

2. 255±5℃, Time: 5±0.5sec;

3. Cooling Speed: 2~10℃/sec.

Note:

1. Preheating: 25~150℃, Time: 60~90sec.

2. Peak Temp.: 255±5℃, Duration: 5±0.5sec.

3. Cooling Speed: 2~10℃/sec.

/ Resistance to Soldering Heat Test Conditions

270±5℃

Time: 10±1 sec.

Temp.: 270±5

Time: 10±1 sec

/ Packaging SPEC.

1 / TUBE

Package Type	Units					Dimension (unit mm ³)		
TO-262								

/ Notices