WR0596 ҂Ҍ Ҍ Ҍ Ҍ Ҍ Ҍ Ҍ Ҍ

v ‴Ω Parameter	ϒ N Symbol	‴Ω Ö Rating	D Ђ Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
RMS Voltage	V_{RMS}	420	V
DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Current	I_F	1 30	A
Peak forward surge current	I_{FSM}	300	A
Typical Thermal Resistance Junction to Case	$R_{\theta Jc}$	2.0	/W

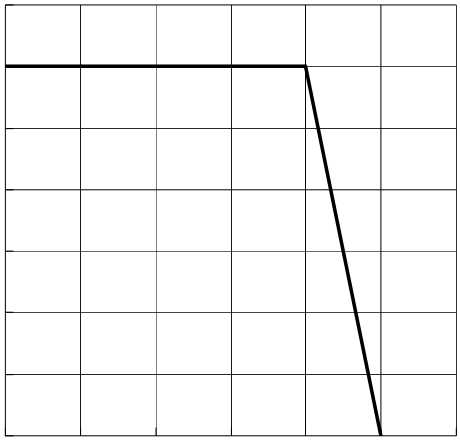

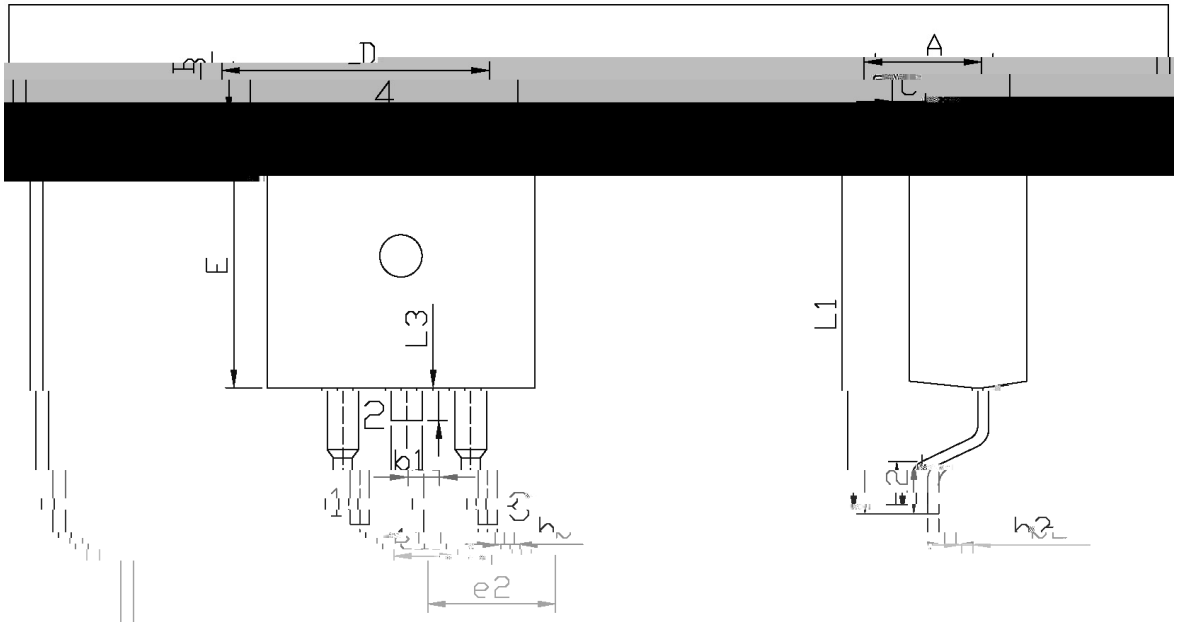

单位：mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	4.30	4.70	L	9.00	9.40
B	1.00	1.40	e1	2.34	2.74

****

ِ ˜ χ

EU χ

P XU6393 χ

---- χ

Note:

BR: Company Code

MUR3060 χ Product Type.

****: Lot No. Code, code change with Lot No.