




--	--	--	--	--




Rev.A Apr.-2022



With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process,HF Product.



Switching applications, interface circuit and driver circuit applications.




PIN 1 IN PIN 2 GND PIN 3 OUT



Marking	H62
---------	-----





Rev.A Apr.-2022

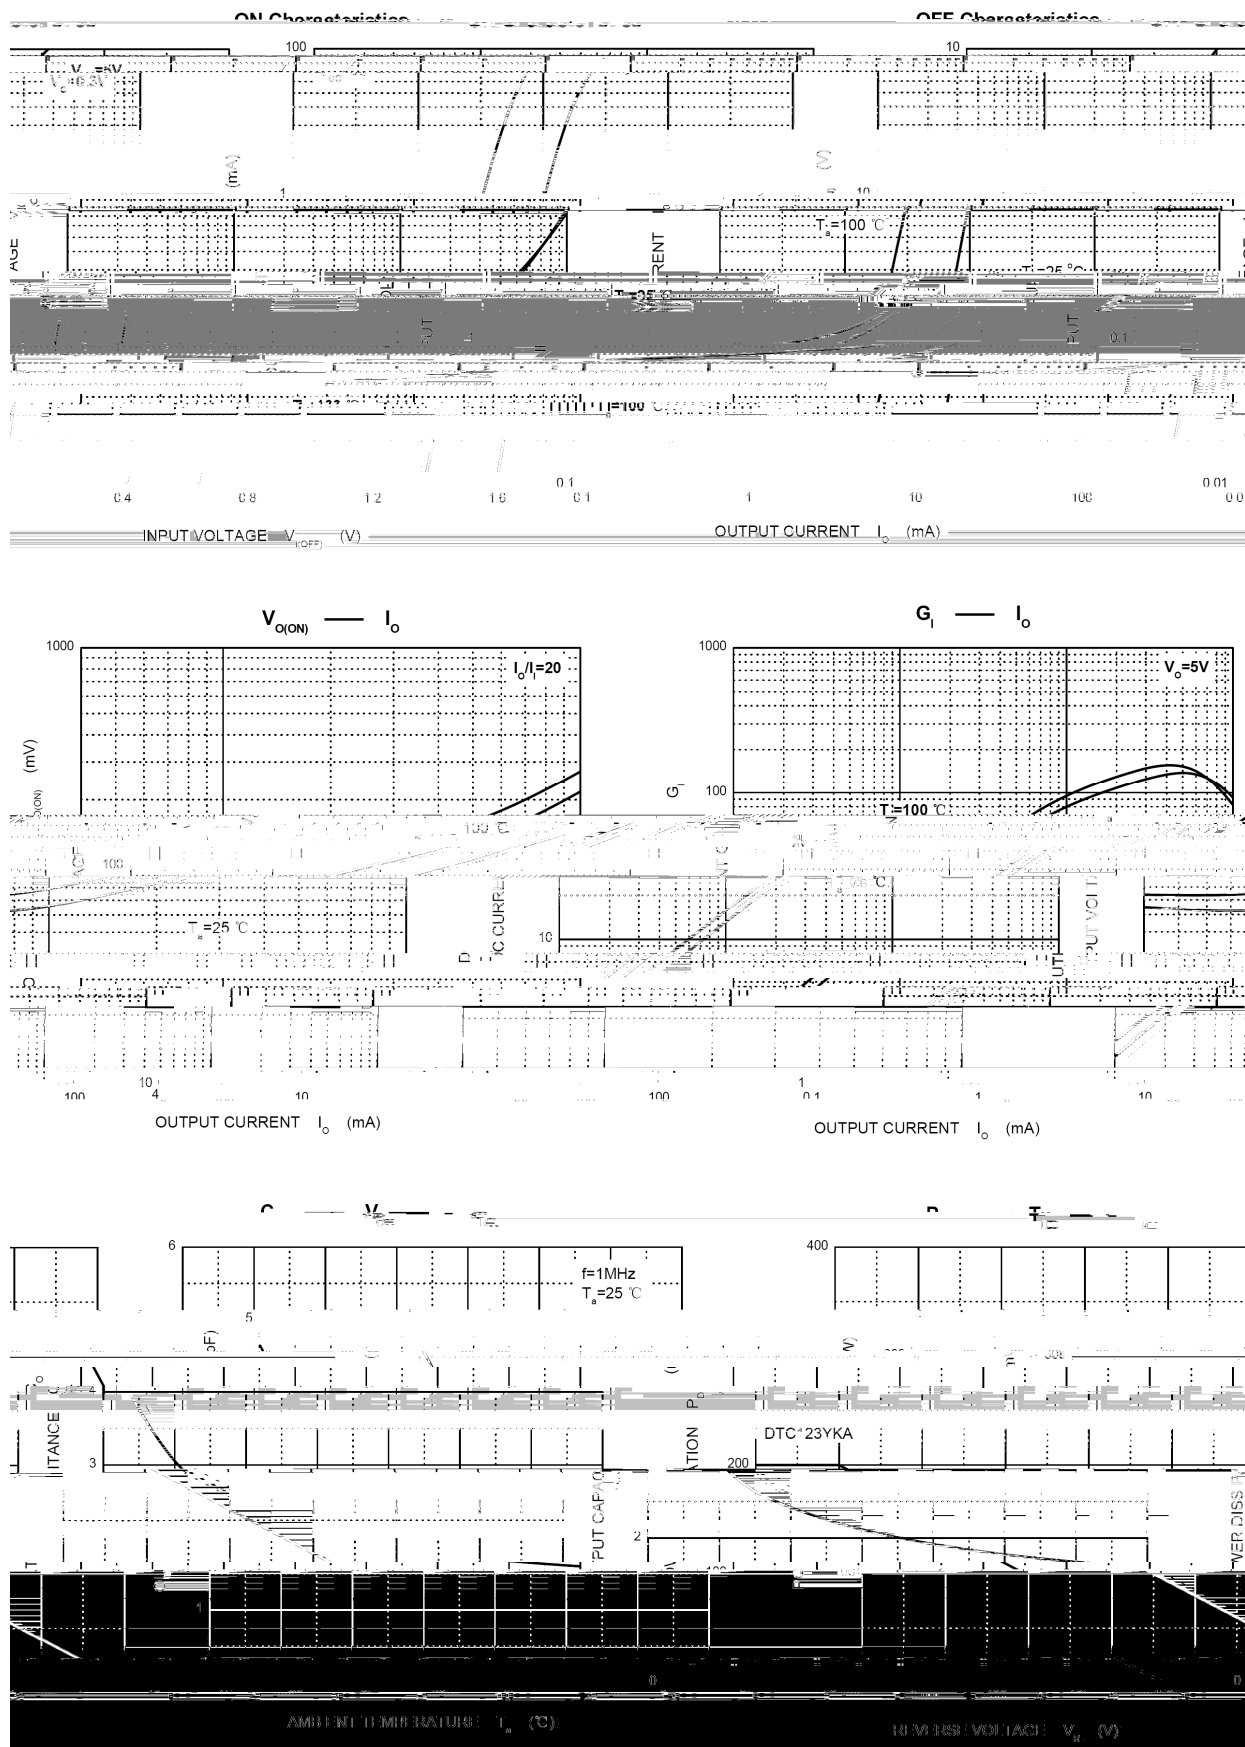



Rev.A Apr.-2022

APRIL 2022

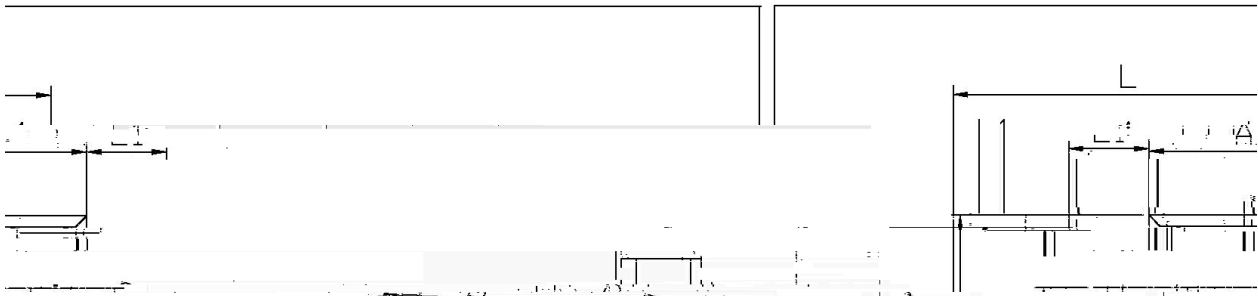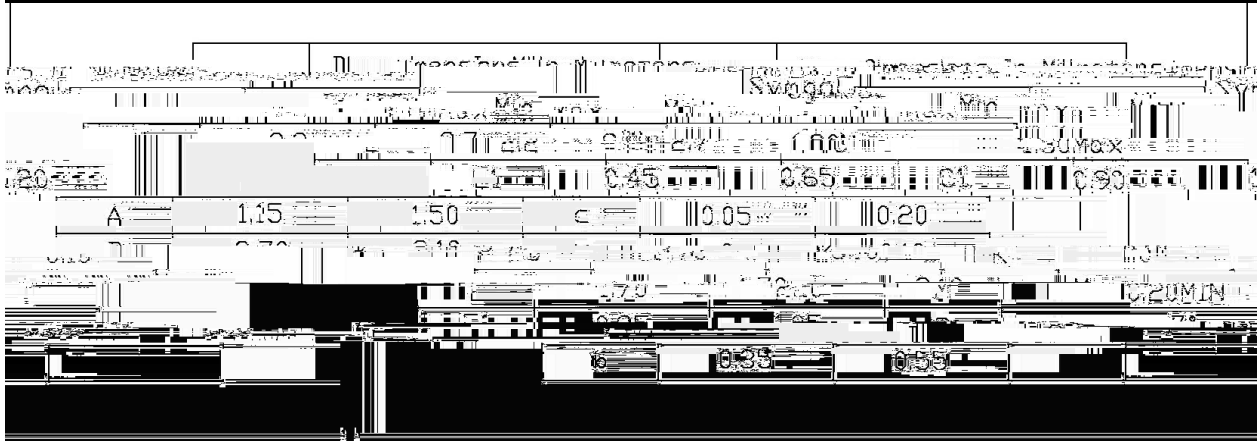



Temperature Profile for IR Reflow Soldering(Pb-Free)

- 1

150 180

60 90sec;

1.Preheating:150~180°C, Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5°C, Duration:5±0.5sec.
- 3

2 10°C/sec.

3. Cooling Speed: 2~10°C/sec.

260±5°C

10±1 sec.

Temp.:260±5°C

Time:10±1 sec

/ REEL

Package type
封装形式