"Yش / Descriptions

2A ABS/LBF
2A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

◕È / Features

100V~1000V 2.0A


Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V,Forward Current: 2.0A, Fast reverse recovery time, Designed for Surface Mount Application. Halogen free product.

٧ ﻉ / Applications


.

General purpose.


ЛفّQ̃ ≠ ع / Equivalent Circuit



ãﺇ ŭ˜ / Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

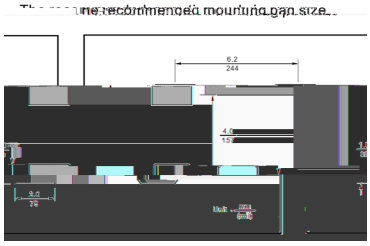


ł. нЭ / Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit

ᵘ Ė Ồ Ļ ƒ / Package Dimensions


ABS/LBF

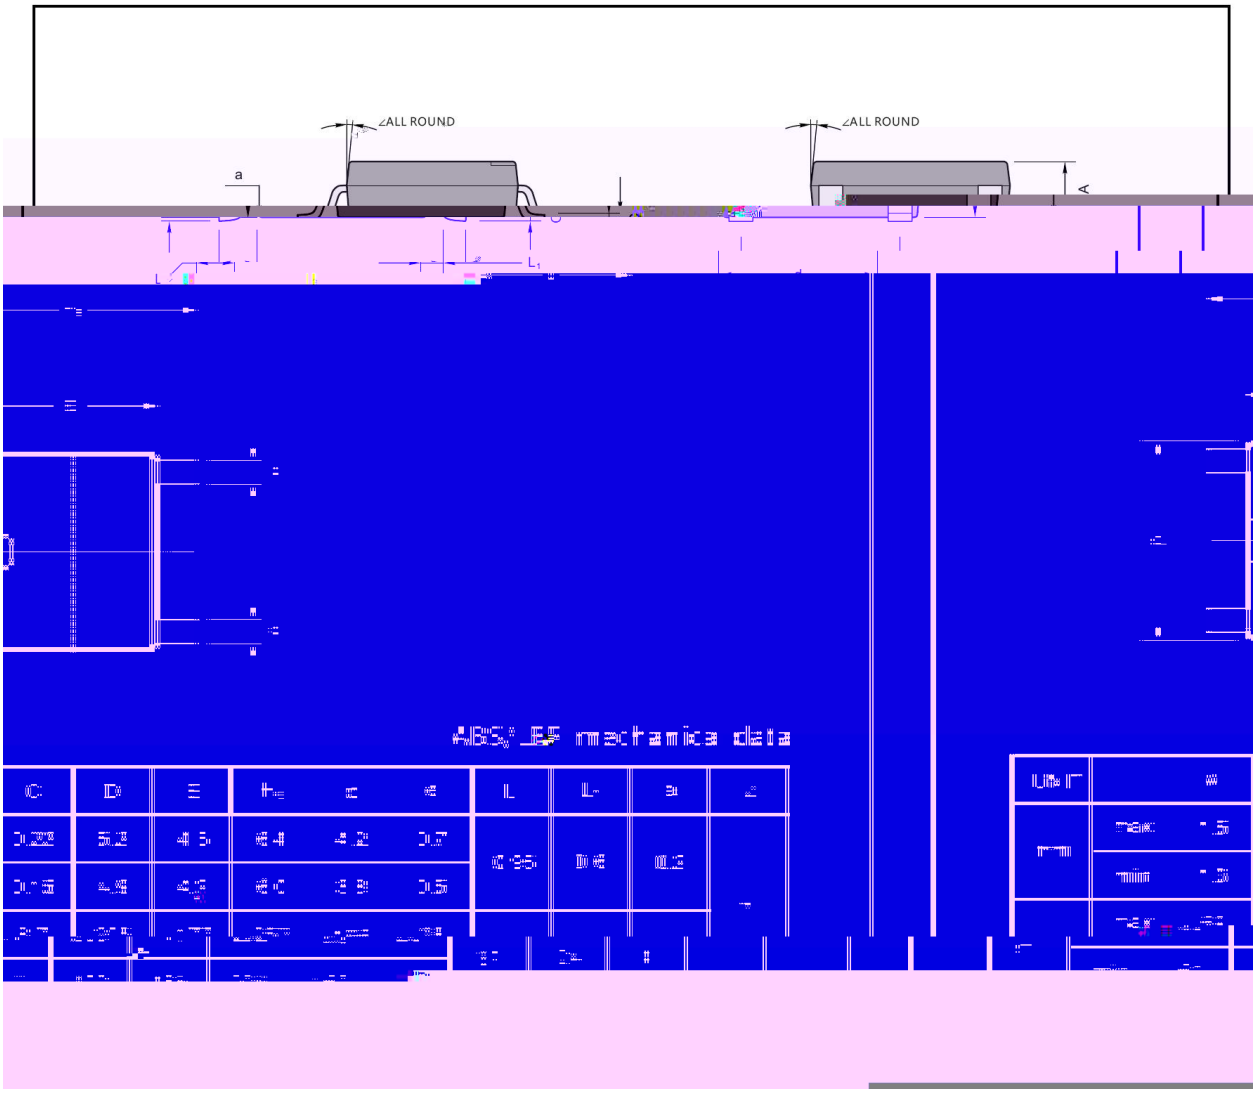


Ł. Ł Ω / Marking Instructions

Marking

Type number	Marking code
FTB1S-20	F20T1
FTB2S-20	F20T2
FTB4S-20	F20T4
FTB6S-20	F20T6
FTB8S-20	F20T8
FTB10S-20	F20T10

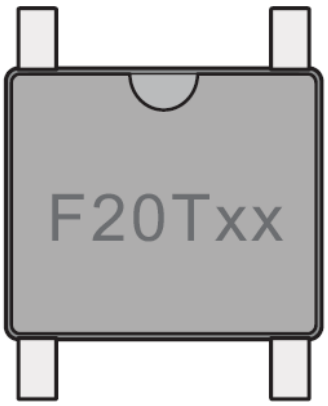

ł. Ł Ω / Marking Instructions

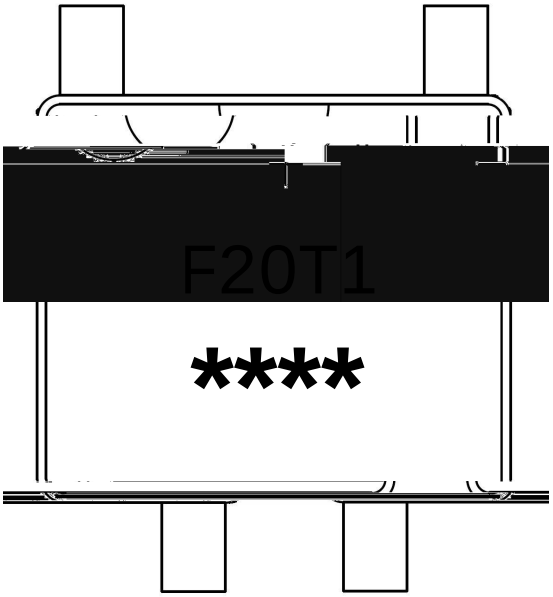

F20T1

**** 1 * 3 *

Note:

F20T1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code