




50~1000V 35 A GBJ

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:35A,GBJ package.

PCB UL 94V-0

Ldeal for printed circuit bodrd,Case material molded plastic,The plastic material has U/L flammability classification 94V-0. Halogen free product.

General purpose.



1 2 3 4
PIN1 DC+ PIN2 AC PIN 3 AC PIN 4 DC-

See Marking Instructions




Parameter	Symbol	GBJ	Rating	Unit
-----------	--------	-----	--------	------





GBJ Package Outline Dimensions



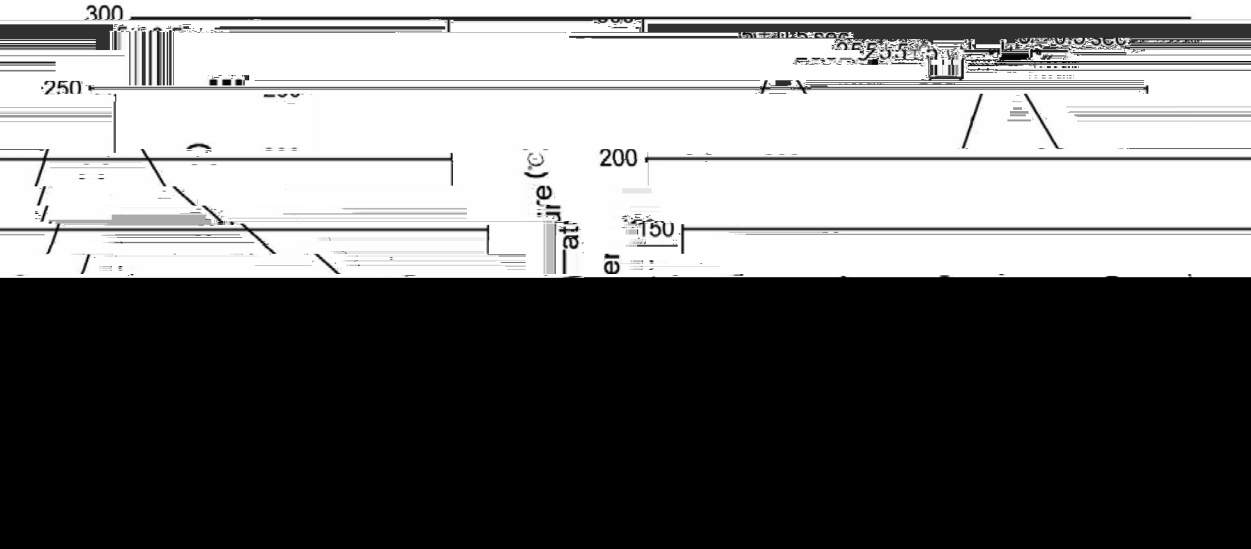

Note:			
1	25 150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3	2 10	/sec.	3. Cooling Speed: 2~10 /sec.

270±5	10±1 sec.	Temp.:270±5℃	Time:10±1 sec
-------	-----------	--------------	---------------

/ BULK