

5 Ø

ì l d ý v k F g 9 y d < k 3 g v y ' k - (; / x o

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:10.0A,GBU package.

/“

i PCB Æ # + k.> % À Ü Ö k.> U L £ ~ ¯ . 94V-0o) í D } o


Ideal for printed circuit board, Case material molded plastic, The plastic material has U/L flammability classification 94V-0. Halogen free product.

— ÷


%† " (.

General purpose.

^ W] Ô



Û æ

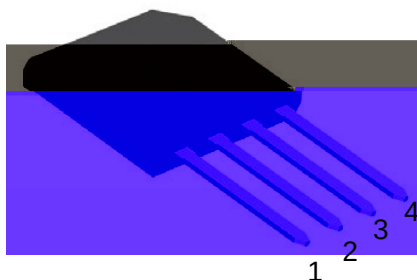

PIN1 y DC- PIN2 y AC PIN 3 y AC PIN 4 y DC+

Z Ü B , M V

- ~ “ ¢ o See Marking Instructions

^ a ? d ;

@ Parameter	Z Symbol	Rating							% y Unit
		GBU 10005	GBU 1001	GBU 1002	GBU 1004	GBU 1006	GBU 1008	GBU 1010	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current(with heatsink Note 2)	$I_{F(AV)}$	10.0							A
Maximum Average Forward Rectified Current @ $T_C=100$ (without heatsink)		3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	220							A
I^2t Rating for Fusing ($t<8.3ms$)	I^2t	200							A^2s
Typical Junction Capacitance Per Element (Note1)	CJ	86							pF
Typical Thermal Resistance (Note2)	R_{Jc}	2.0							/W
Operating Temperature Range	T_j	-55 to +150							
Storage Temperature Range	T_{stg}	-55 to +150							

NOTE:

1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2.Device mounted on 150mm*150mm*1.6mm Cu Plate Heatsink.

@i x? d ;

@ Parameter	Z Symbol	y i Ū Test Conditions	Rating	% y Unit
Maximum Forward Voltage	V_F	$I_F=5.0A$	1.0	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a=25$	5.0	A
		$T_a=125$	500	

0? d ¢

FIG.1-FORWARD CURRENT DERATING CURVE

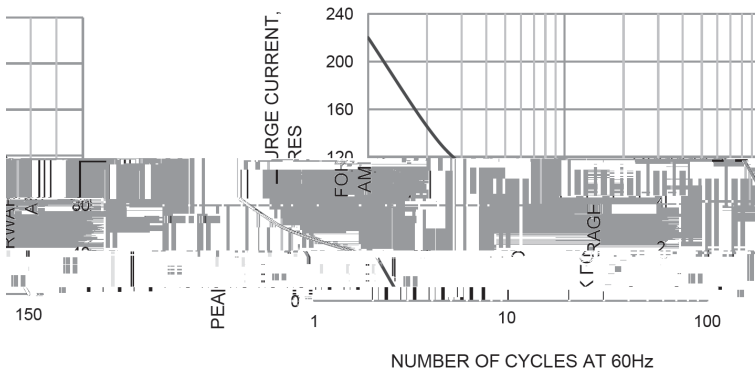


FIG.2-MAXIMUM FORWARD SURGE CURRENT

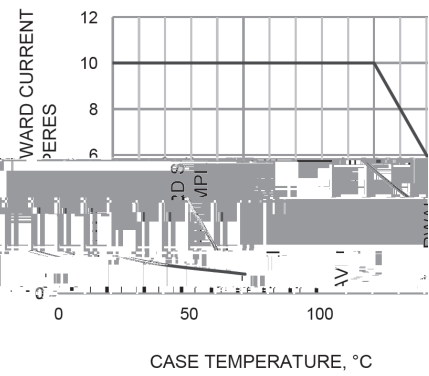


FIG.4-TYPICAL FORWARD CHARACTERISTICS

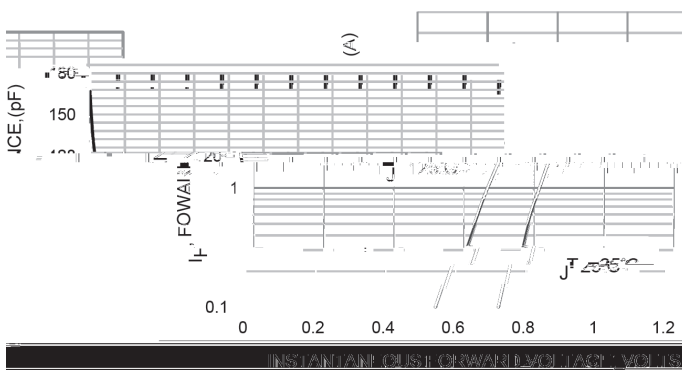


FIG.5-TYPICAL JUNCTION CAPACITANCE

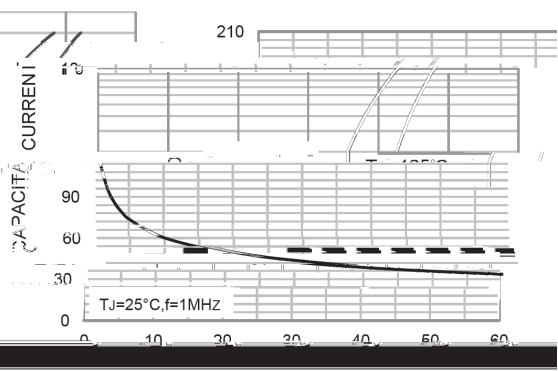


FIG.3-TYPICAL REVERSE CHARACTERISTICS


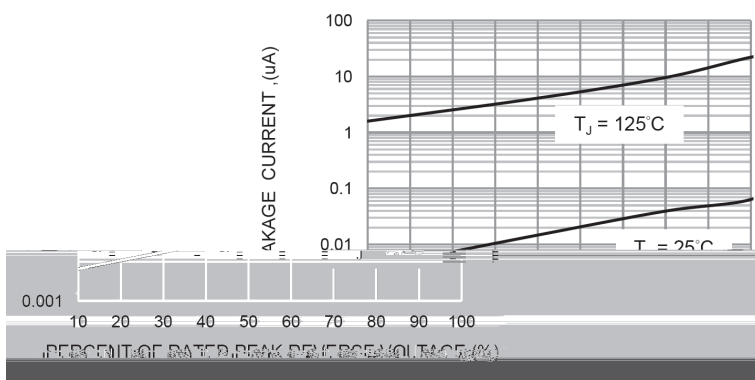


FIG.5-TY

, M y




“ ¢ y
- (; y D } ” Z
y ÿD Z W A k ÿD Z J

4 U Z K

GBU10005: Product Type.
****: Lot No. Code, code change with Lot No.

GPD t ¢ x /

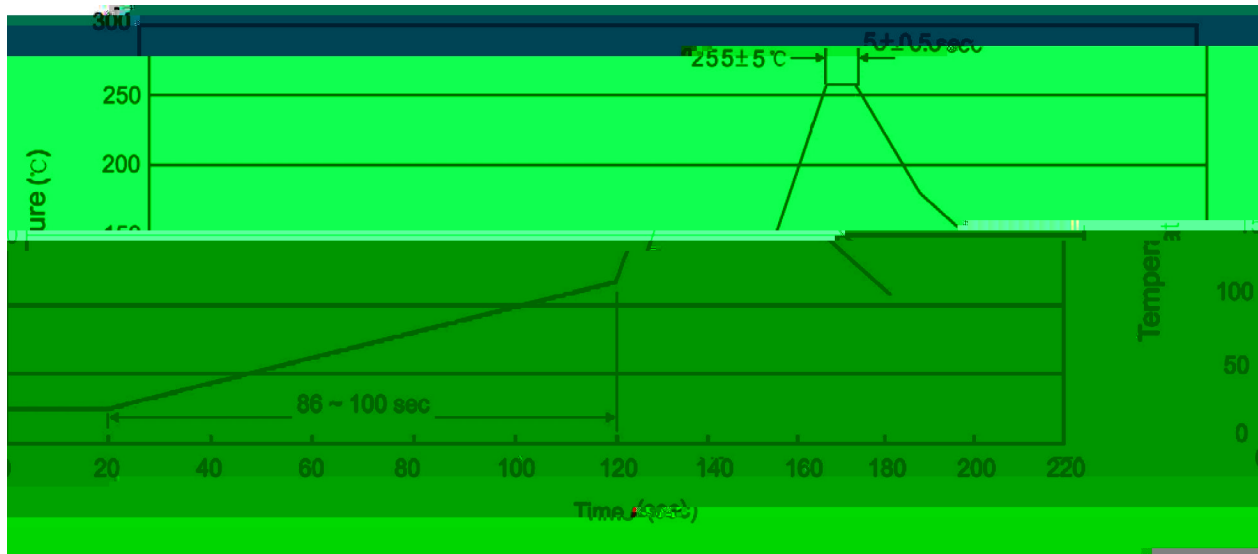

“ ¢ y

1o ~ % 25 %150 - k 60 %90sec;
 2o Q 255 r5 - k 4 Ò 5 r0.5sec;
 3o D N òi Ò , 2 %10 - /sec.

Note:

1.Preheating:25~150 - , Time:60~90sec.
 2.Peak Temp.:255 r5 - , Duration:5 r0.5sec.
 3. Cooling Speed: 2~10 - /sec.

´D /Cª p fl »]

y 270 r5 -

y 10 r1 sec.

Temp.:270±5

Time:10±1 sec

G P Æ

^ x / BULK

Package Type ß m ù ´	Units g m ô h					Dimension g m d Ê (unit ! cm³)		
	ß /ß	ß /ç	ß /ç	ç /±	ß /±	ß ß	ß ç	ß ±
B	-	-	ß	ß	ß	-	4 ×ß ×9	ß ×2 ×2

— y