



**KTA1273T**  
Rev.E Mar.-2016

SOT-89          PNP




| Parameter                 | Symbol | Rating | Unit |
|---------------------------|--------|--------|------|
| Collector to Base Voltage |        |        |      |

## Electrical Characteristic Curve

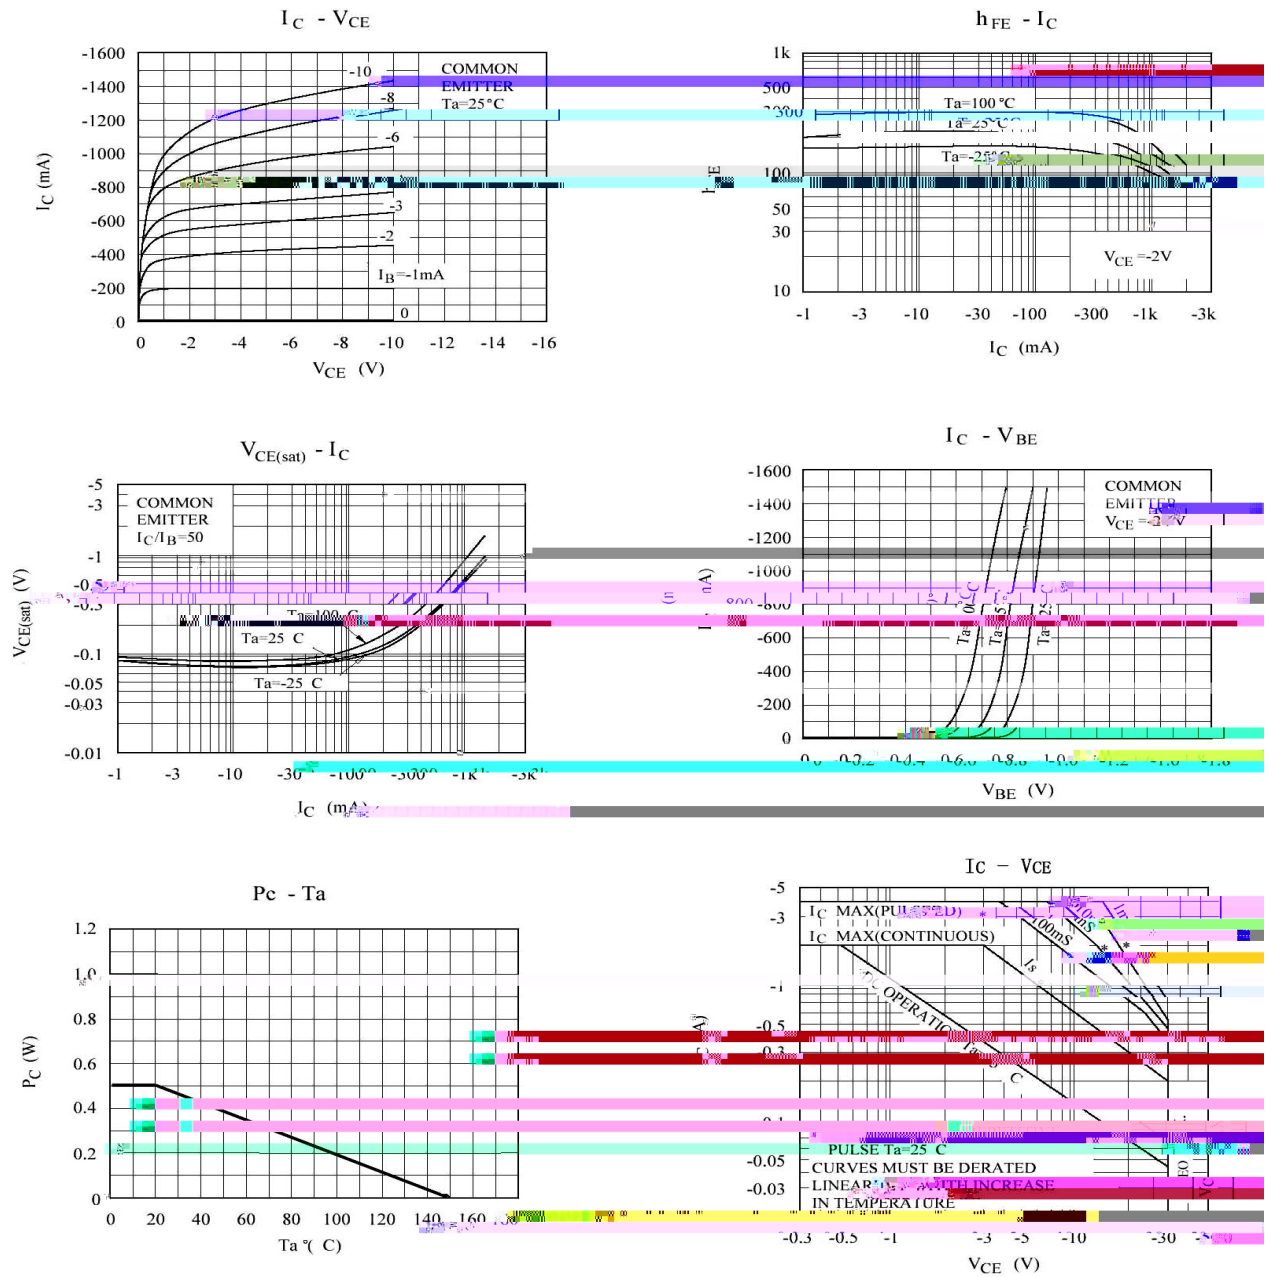

**KTA1273T**

1. 1.1 / Marking Instructions

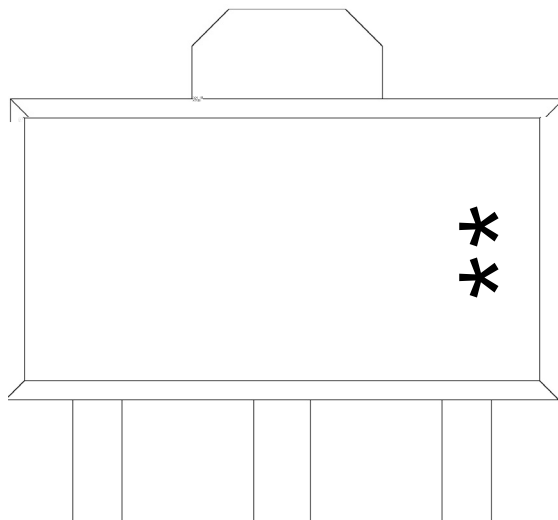

H

P3

O  $h_{FE}$

\*\*

Note:


H: Company Code.

P3: Product Type.

O  $h_{FE}$  Classifications Symbol

\*\*: Lot No. Code, code change with Lot No.

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

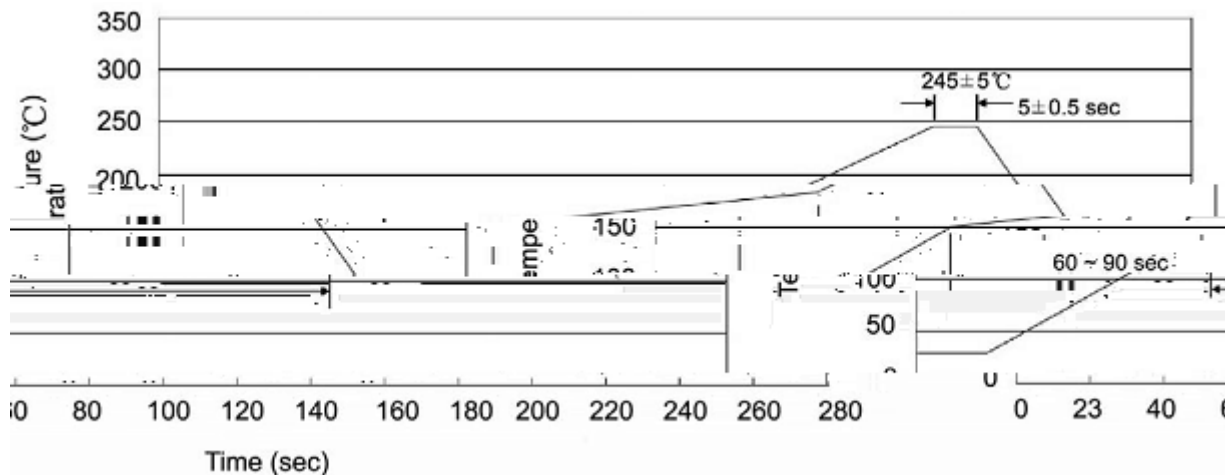

Note:

1. Preheating: 25~150 , Time: 60~90sec.
2. Peak Temp.: 245±5 , Duration: 5±0.5sec.
3. Cooling Speed: 2~10 /sec.

Resistance to Soldering Heat Test Conditions

260±5      10±1 sec.      Temp.: 260±5      Time: 10±1 sec

Packaging SPEC.

/ REEL

| Package Type<br>封装 | Units 包 量 |      |   |   |  | Dimension 包 尺寸 (unit: mm <sup>3</sup> ) |  |  |
|--------------------|-----------|------|---|---|--|-----------------------------------------|--|--|
|                    | 卷盘        | 卷盘 盒 | 盒 | 盒 |  | 盒                                       |  |  |
|                    |           |      |   |   |  |                                         |  |  |

Notices