


KTC4376

SOT-89 NPN

, KTA1664

٧٩ ٥ ٤ / Equivalent Circuit




KTC4376


Ⓜ Ⓔ Ⓘ Ⓛ Ⓛ / Package Dimensions

Ⓜ Ⓔ Ⓘ Ⓛ Ⓛ

单位: mm

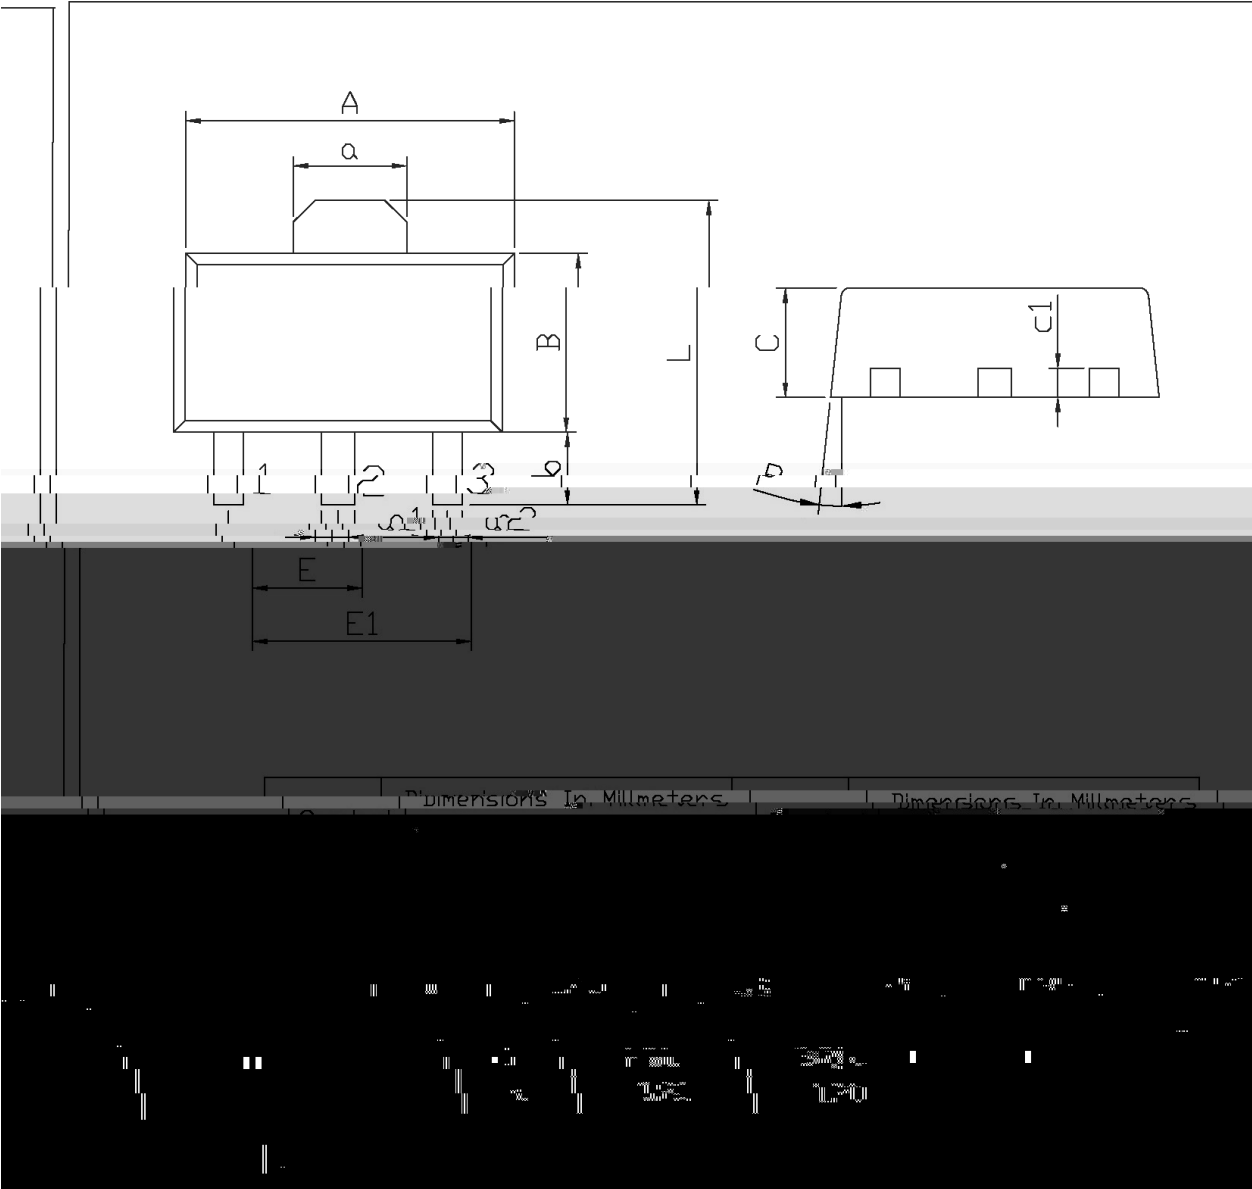


4. 1. 1. / Marking Instructions

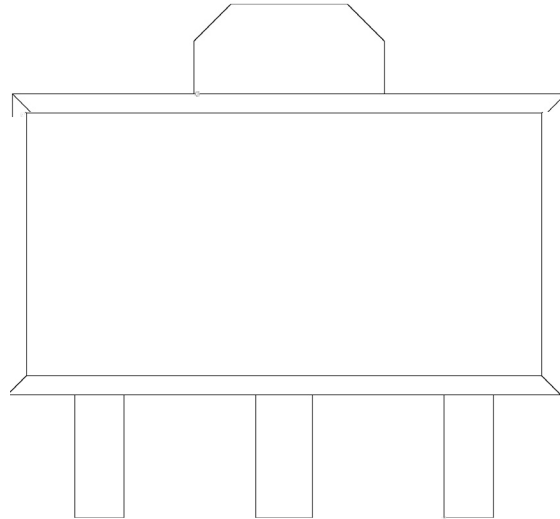

**

Thermal Shock Test Conditions / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

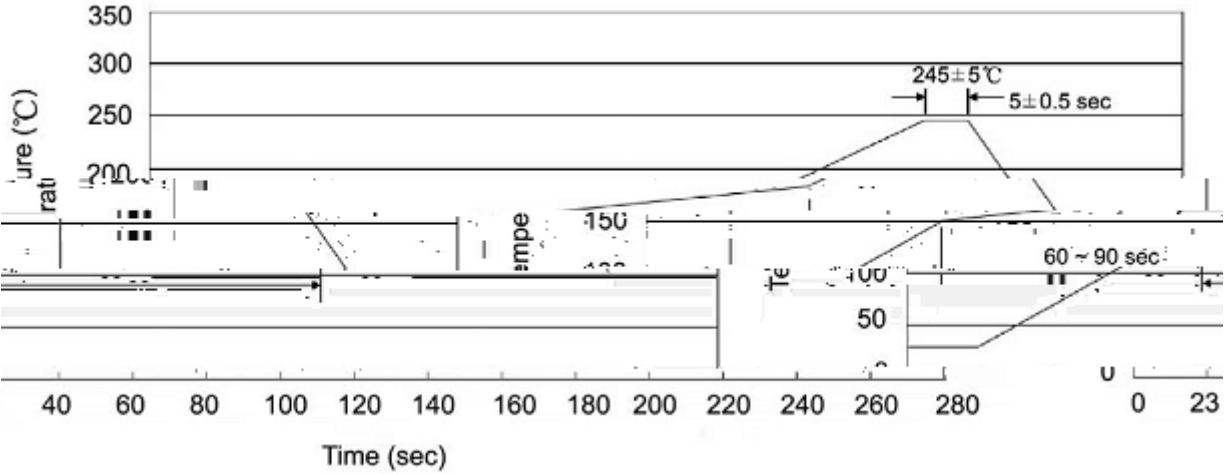

± ± ± ±

Resistance to Soldering Heat Test Conditions

± ±

Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392