/ Descriptions

TO-220 Voltage Regulator in a TO-220 Plastic Package.

/ Features

1A,

3-Terminal regulators ,output current up to 1A, internal thermal overload protection and short-circuit limiting.

/ Applications

Voltage Regulator.

/ / Equivalent Circuit or Application Circuit

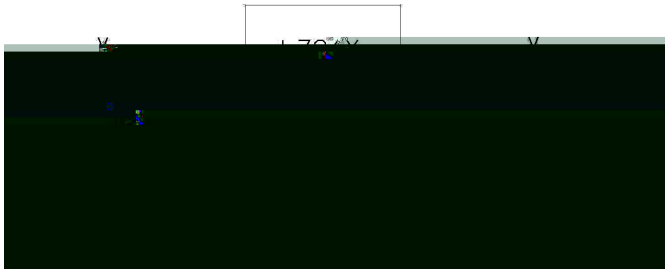

/ Pinning



PIN1 IN PIN 2 GND PIN 3 OUT

/ Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Input voltage	V_I	35	V
Operating Junction Temperature Range	T_{OPR}	0 125	
Storage temperature range	T_{stg}	-65 150	

Parameter

/ Package Dimensions

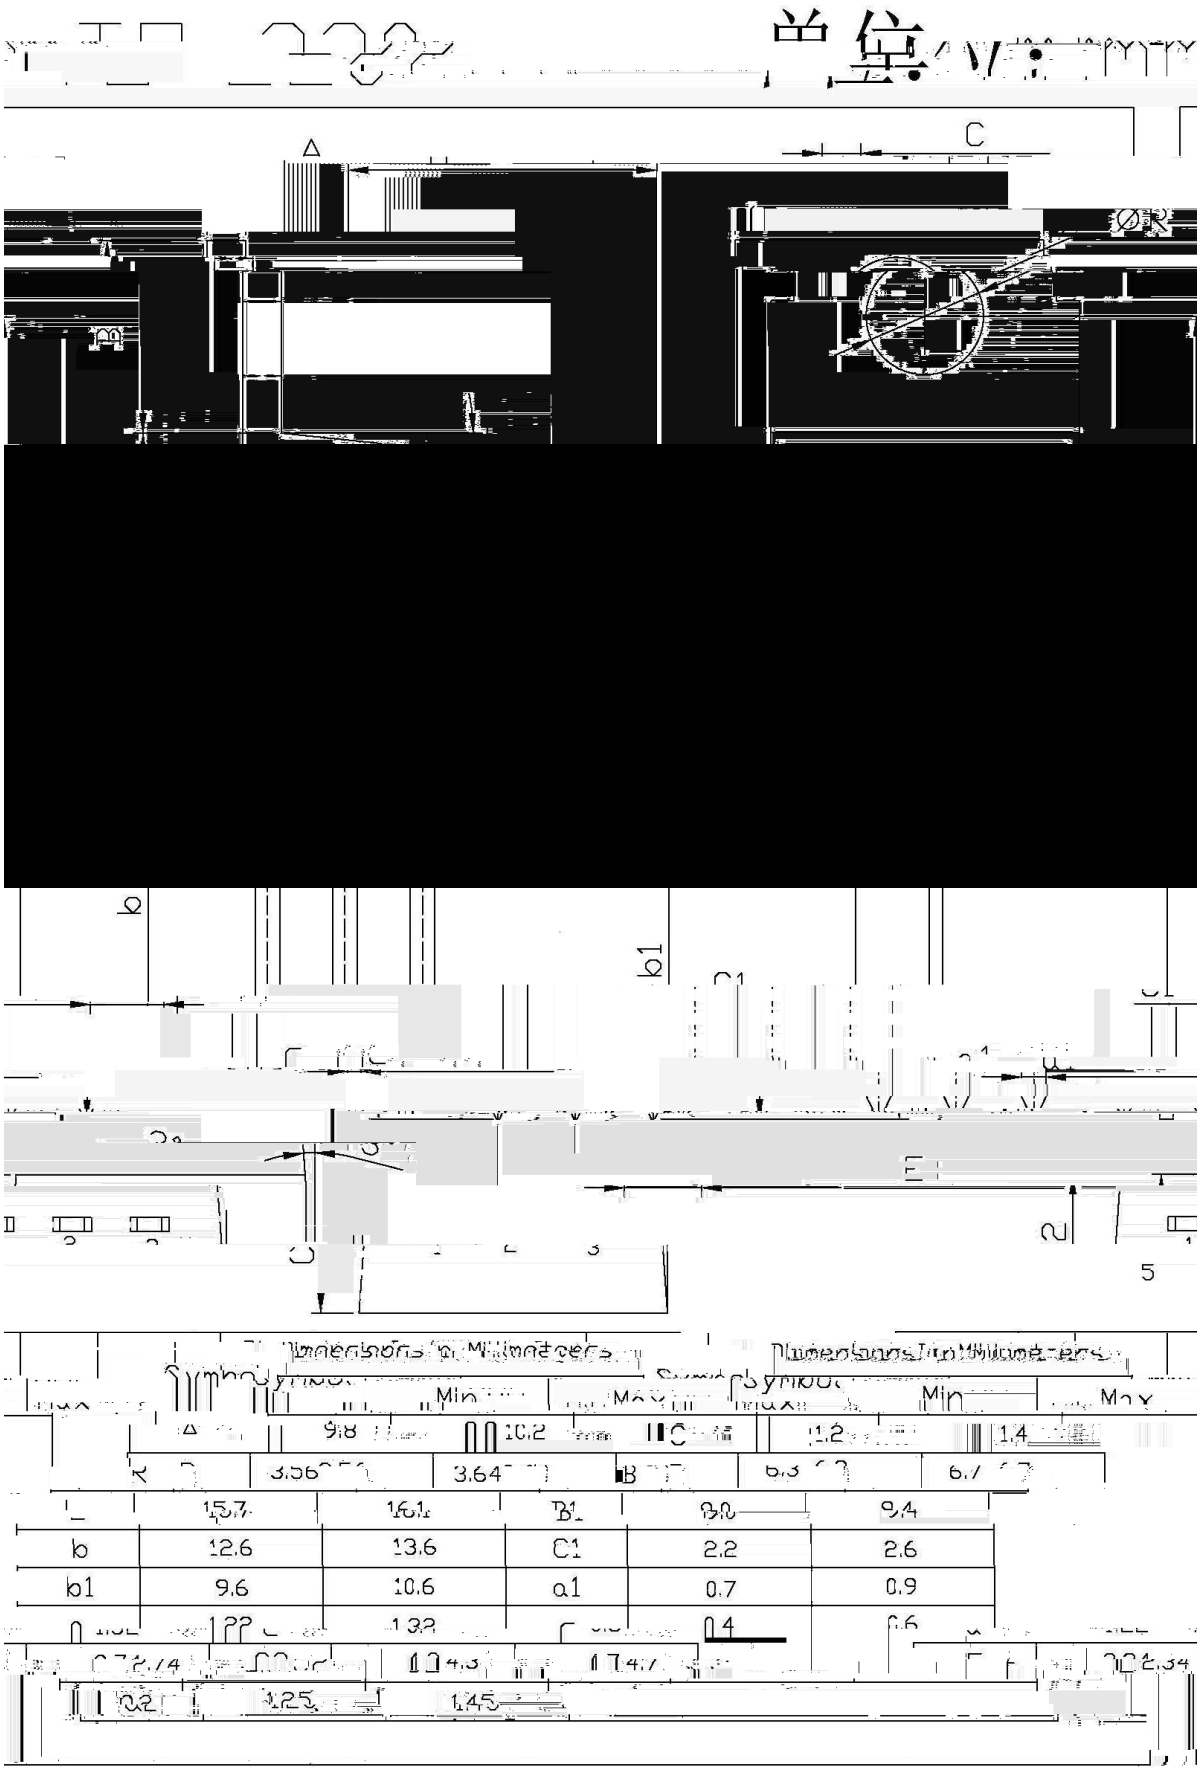

/ Marking Instructions

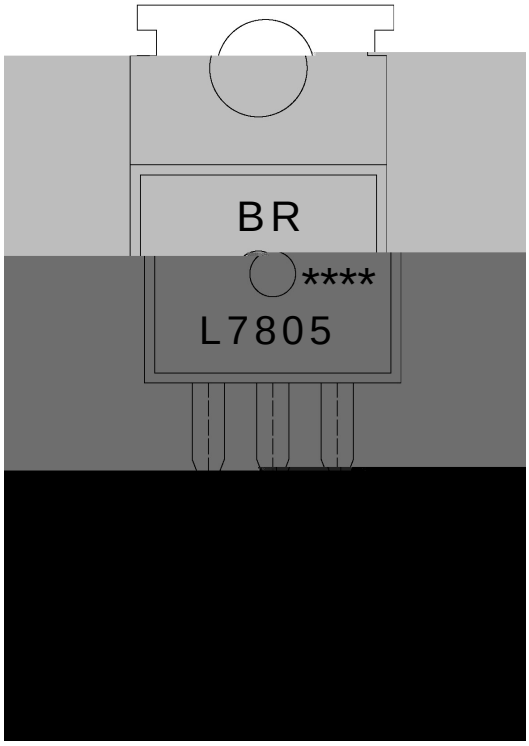

BR

L7805

****

Note:

BR:	Company Code.
L7805:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

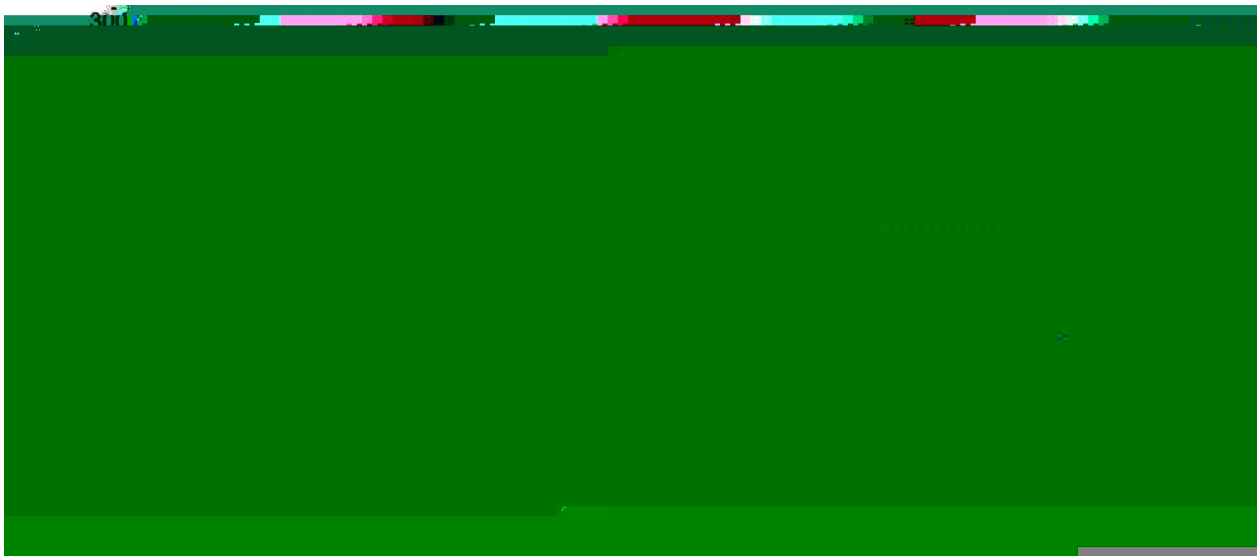

			Note:
1	25 150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3		2 10 /sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm3)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type	Units		Dimension	(unit mm3)
	Units/Tube /	T45×19 /Innr Bo4.3(69 0 0 9 292.92 50)63ab503 T7.36 (T)nits/Tu 10,00u[illegible]1 T2[illegible]385.[illegible]2.1565eb10 T[illegible]a0695+ T[illegible]26.4TT7 x69 0 0 9 292.92366.1247.36 (T)nits/Tu10,00		