

/ Descriptions



Schottky Barrier Diode in a TO-220 Plastic Package.

/ Features

Low forward voltage drop, low power losses, High efficiency operation.

/ Applications

For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.


/ Equivalent Circuit**/ Pinning**

PIN1 Anode PIN 2 Cathode PIN 3 Anode


/ h_{FE} Classifications & Marking

See Marking Instructions.


/ Electrical Characteristic Curve

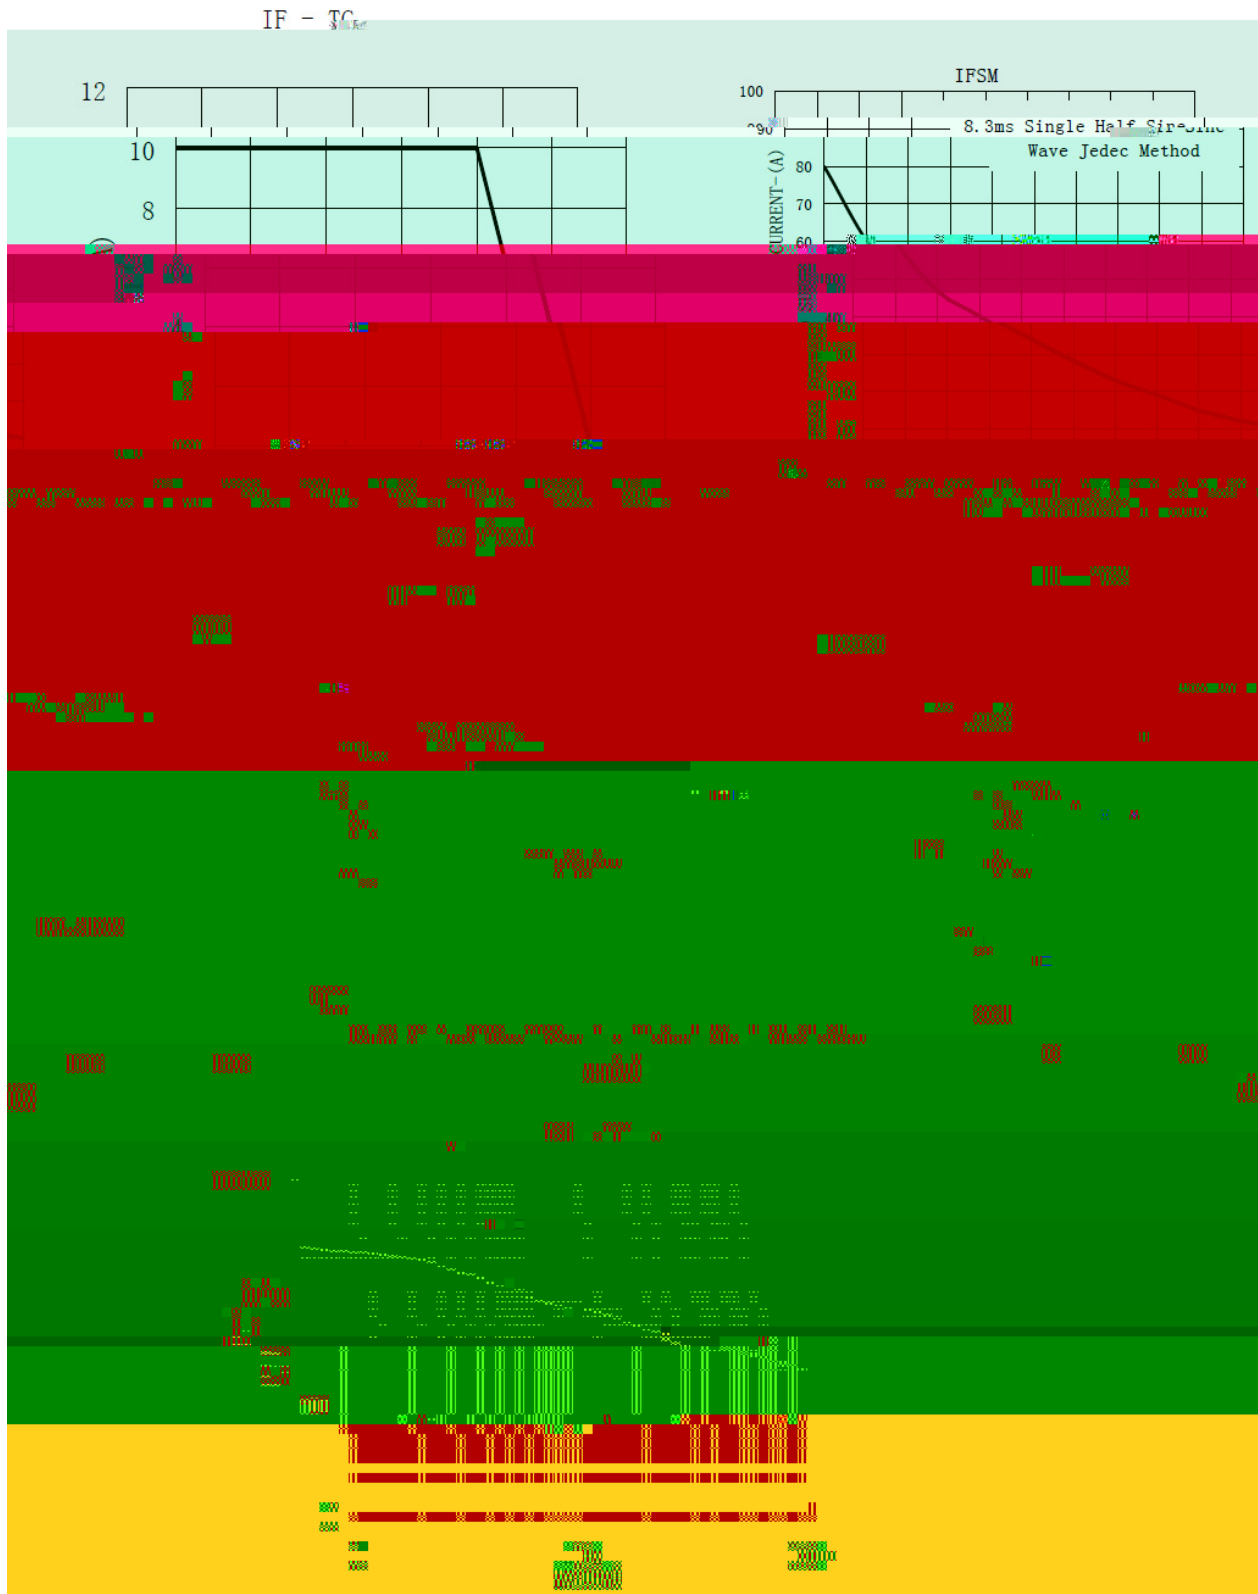

/ Package Dimensions

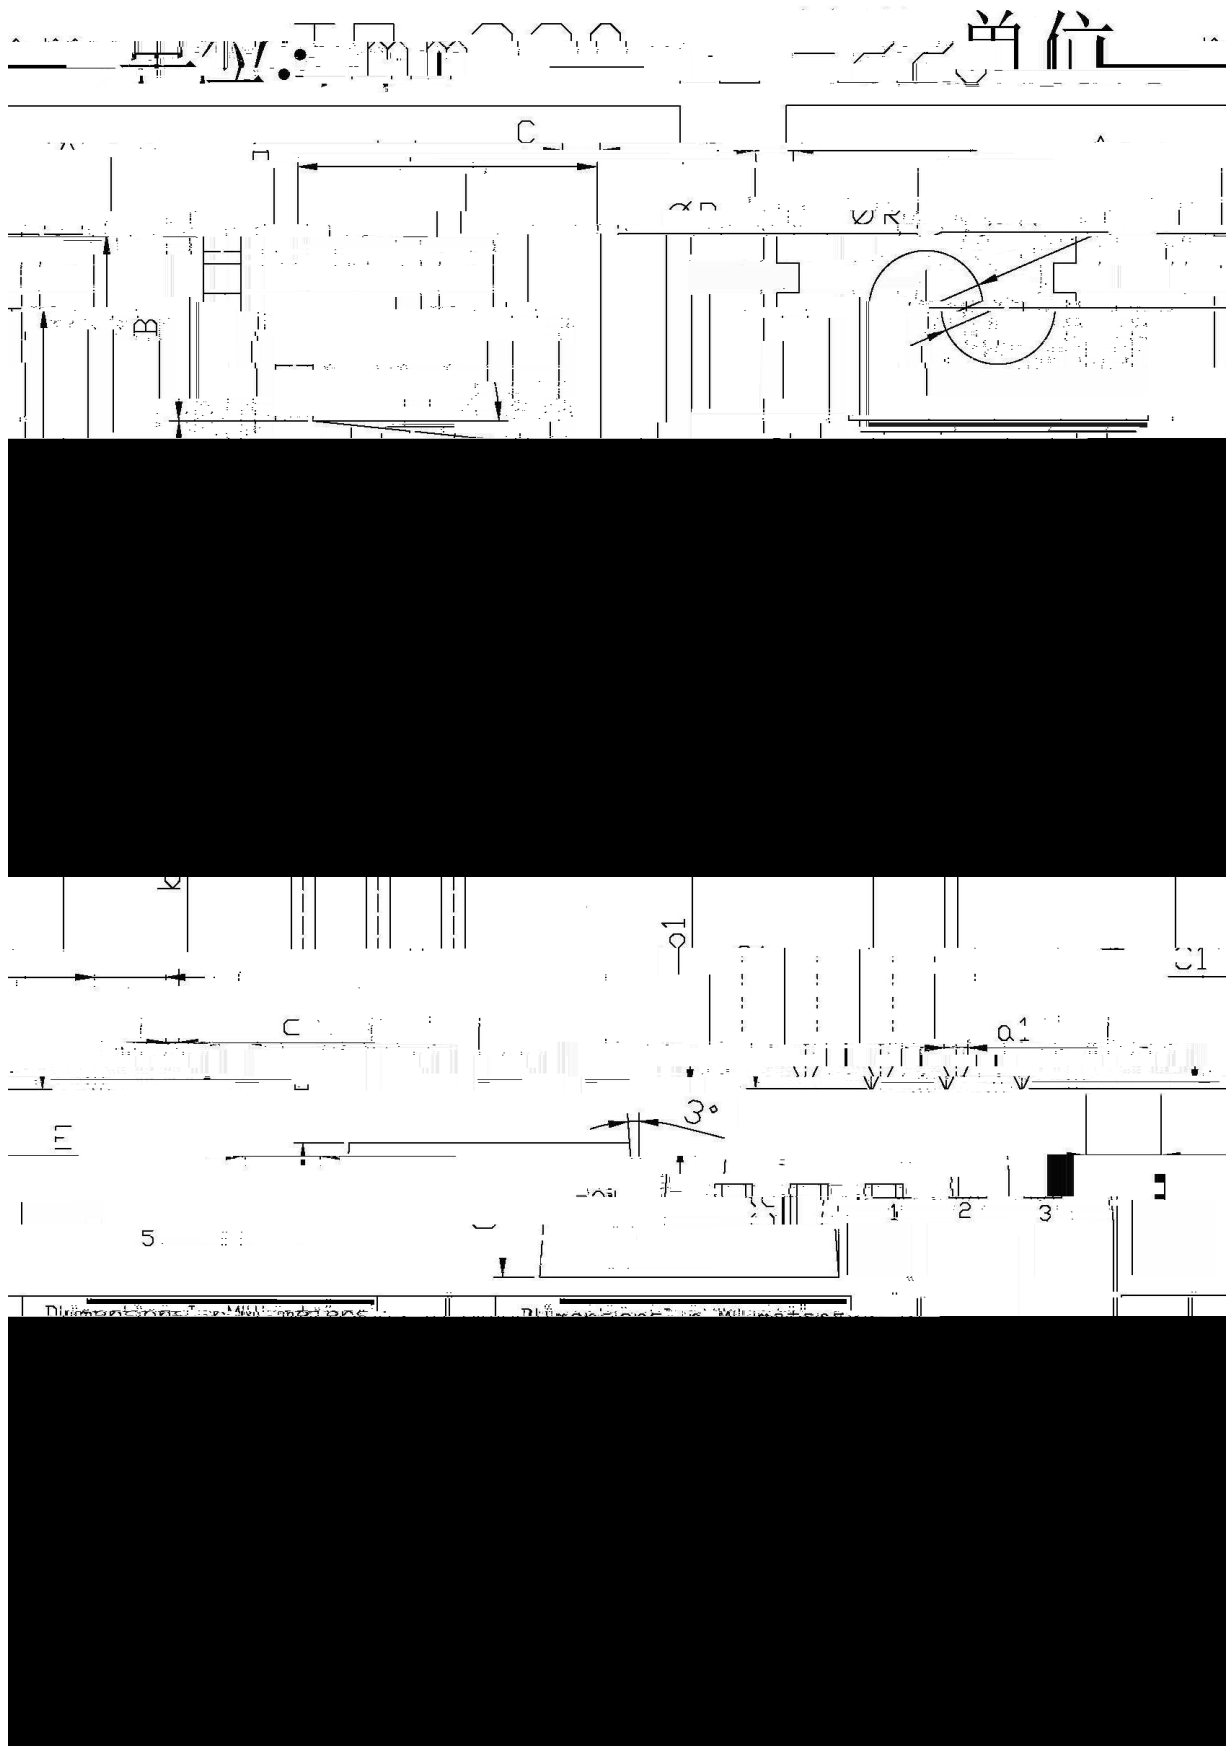

/ Marking Instructions

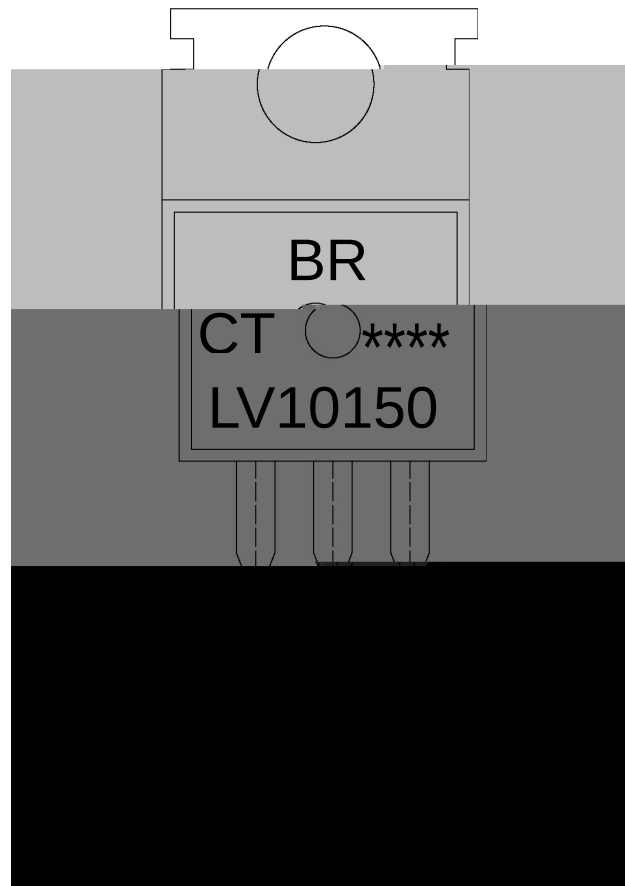

Note:


BR: Company Code

LV10150 Product Type.

CT: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

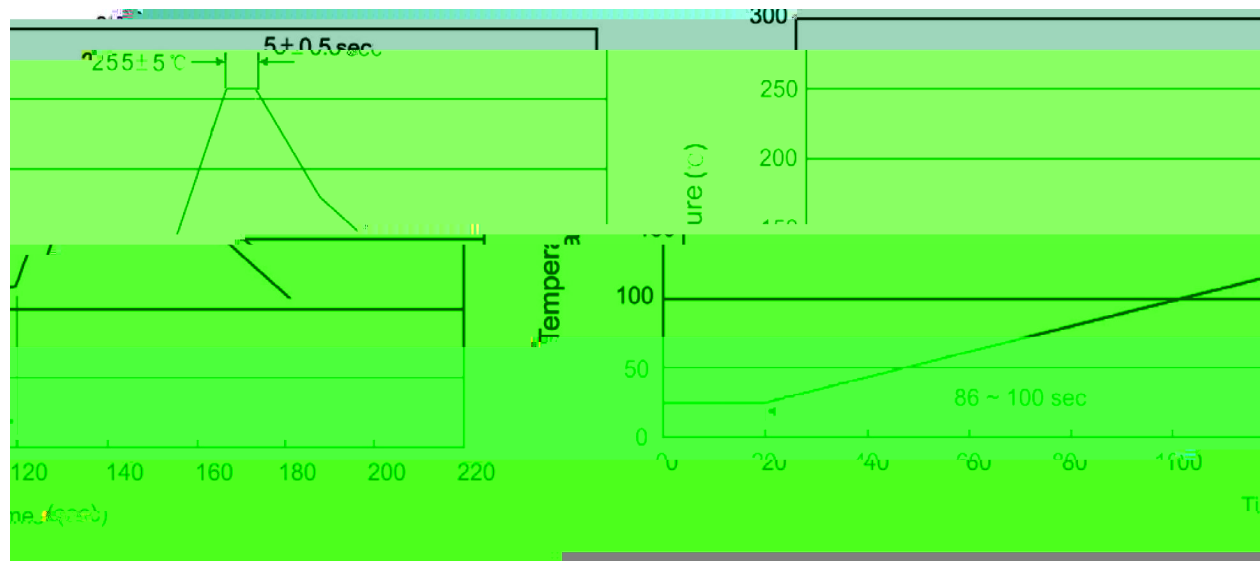

Note:

- 1

25 150

60 90sec;
- 2

255 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

270 5 10 1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195