

/ Descriptions

TO-277

TO-277 Plastic package Schottky diode .

/ Features


$$V_F(\text{typ})=0.21\text{V}$$

High Forward Surge Capability, Ultra Low Forward Voltage Drop $V_F(\text{typ})=0.21\text{V}$, Excellent High Temperature Stability. HF Product.

/ Applications

For use in low voltage,high frequency inverters, free wheeling, and polarity protection applications.


/ Equivalent Circuit



/ Pinning



PIN1 Anode PIN 2 Cathode PIN 3 Anode

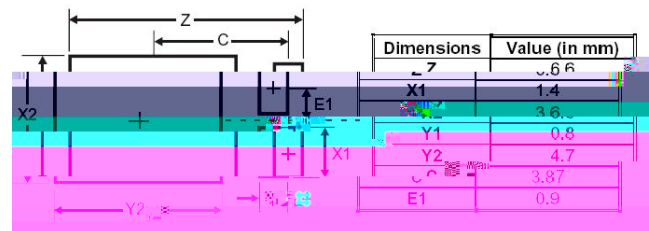


Suggested Pad layout

/ h_{FE} Classifications & Marking


See Marking Instructions.

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V		
Working Peak Reverse Voltage			
Peak Reverse Voltage			

/ Package Dimensions

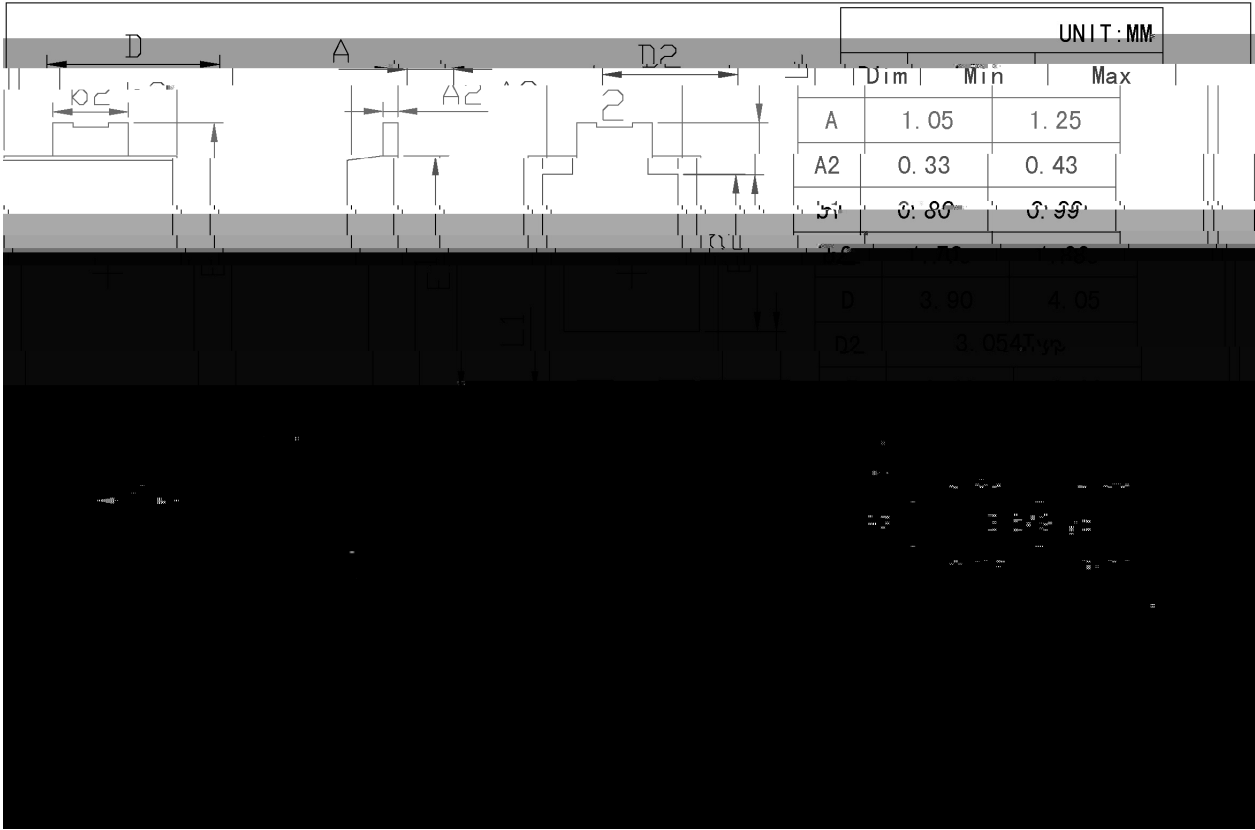

/ Marking Instructions

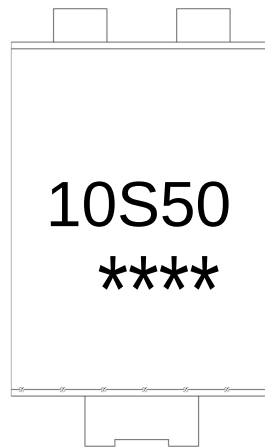

10S50

Note:


10S50

Product Type.

****:

Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

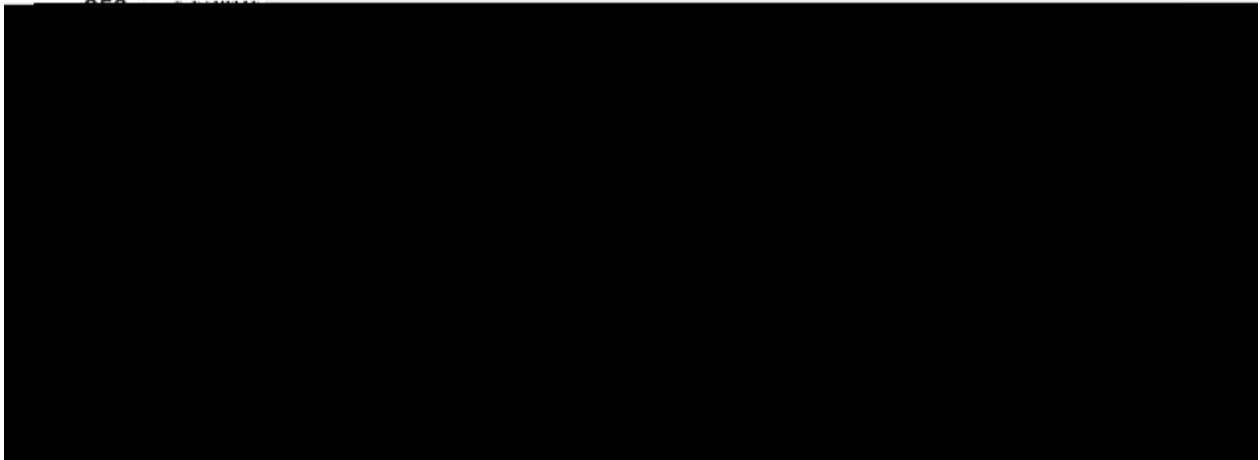

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-277	5,000	3	15,000	6	90,000	13 p ×12	360×360×50	380×335×366

/ Notices