

/ Descriptions

TO-263


/ Features

/ Applications

OR-ing

DC-DC

/ Equivalent Circuit





/ Pinning



/ h_{FE} Classifications & Marking


/ Electrical Characteristic Curve

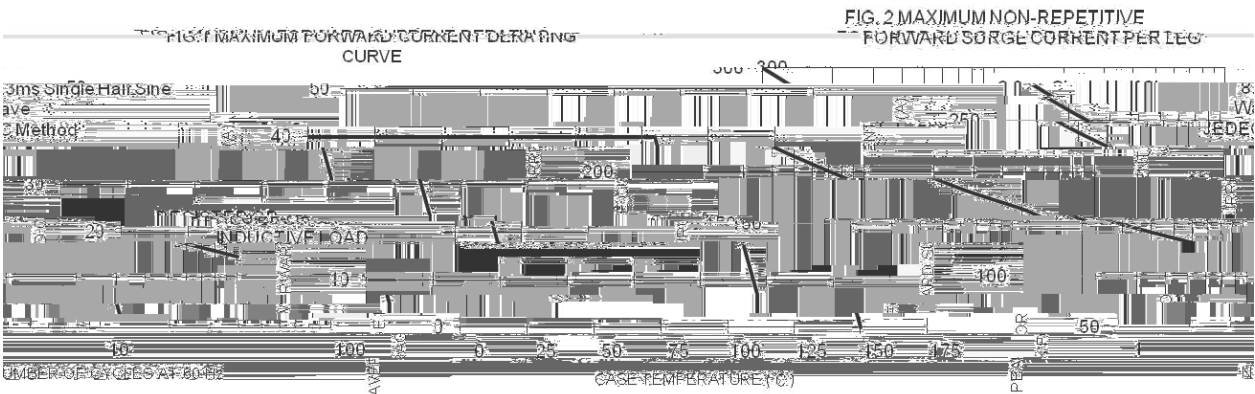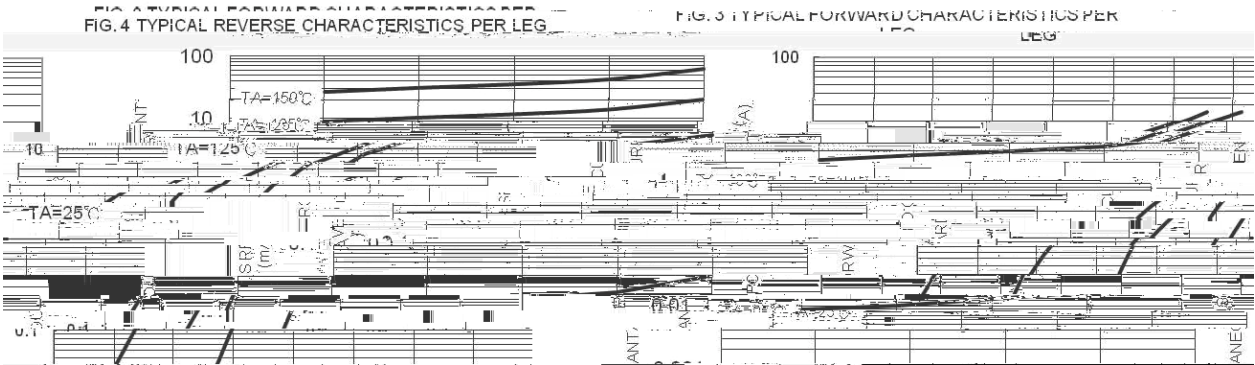


Technical drawing of a mechanical part, showing a side view (top) and a front view (bottom). The side view includes dimensions B_1 , D , A , and 4 . The front view includes dimensions E , L_3 , b_1 , e_2 , L_1 , and b_2 . The drawing also shows a circular feature and a rectangular feature.

Millimeters		Inches		Millimeters		Inches	
Max	Min	A	B	Max	Min	A	B
9.40	4.30	4.30	1.30	4.70	1.40	1.85	2.34
2.74	1.30	1.30	1.40	1.10	0.90	0.90	0.90
4288	5628	15.00	16.00	b1	1.15	1.35	1.1

/ Marking Instructions

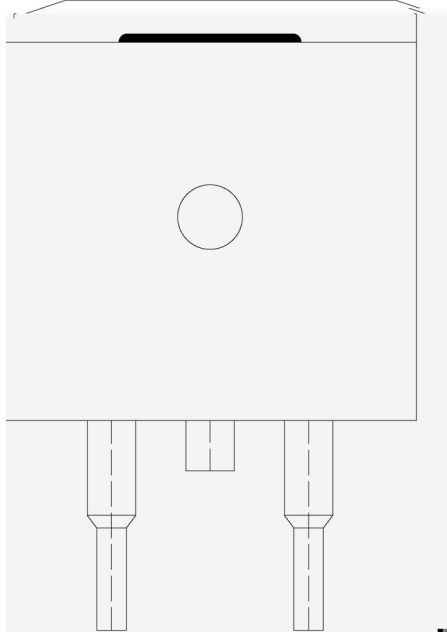

() / Temperature Profile for Dip Soldering(Pb-Free)

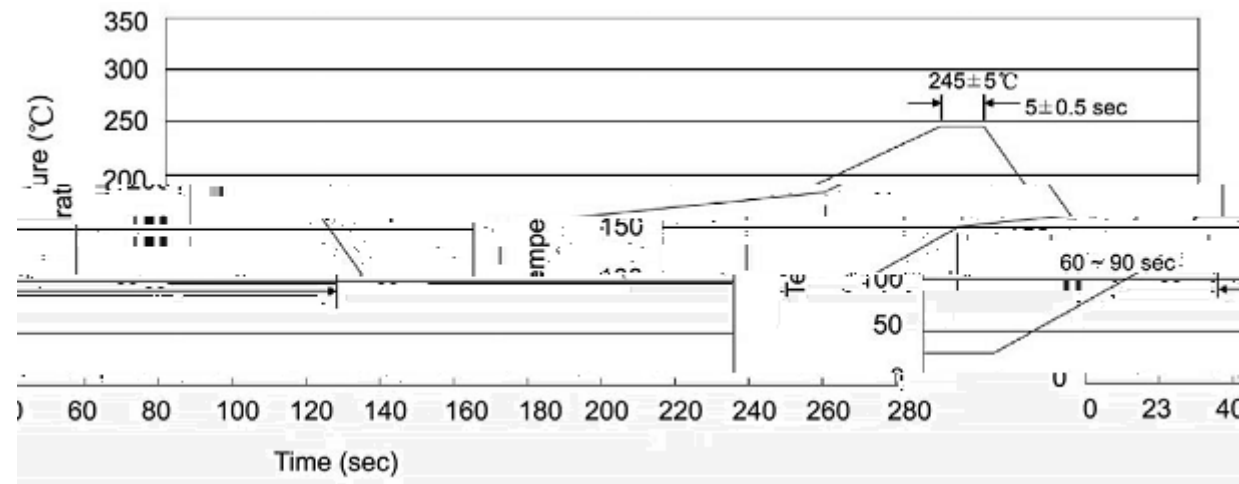

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

Units/Reel	Reels/Inner Box	Units/Inner Box	
/	/		