

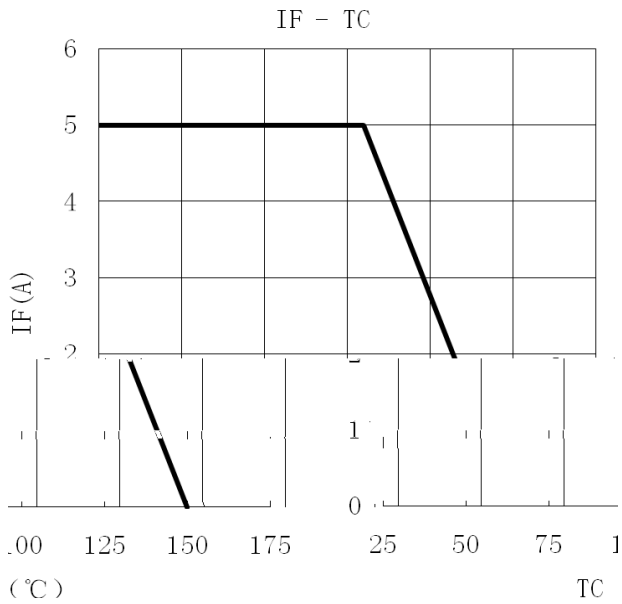
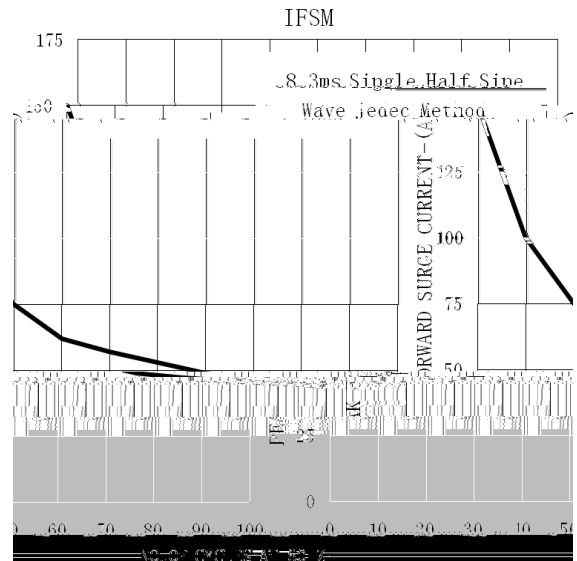
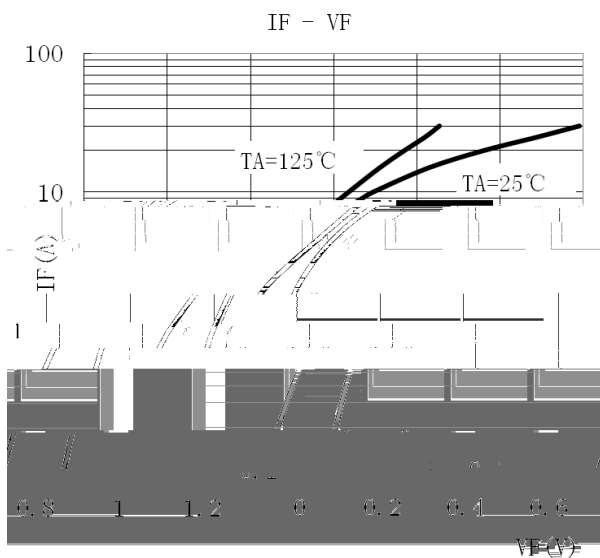
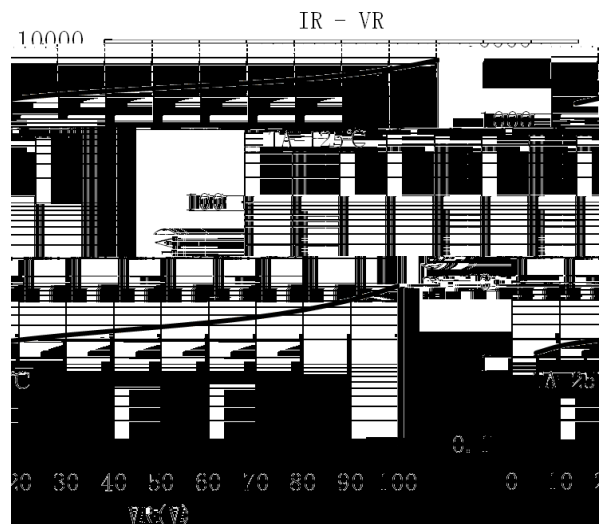


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage			
Working Peak Reverse Voltage			
DC Blocking Voltage			


Electrical Characteristic Curve

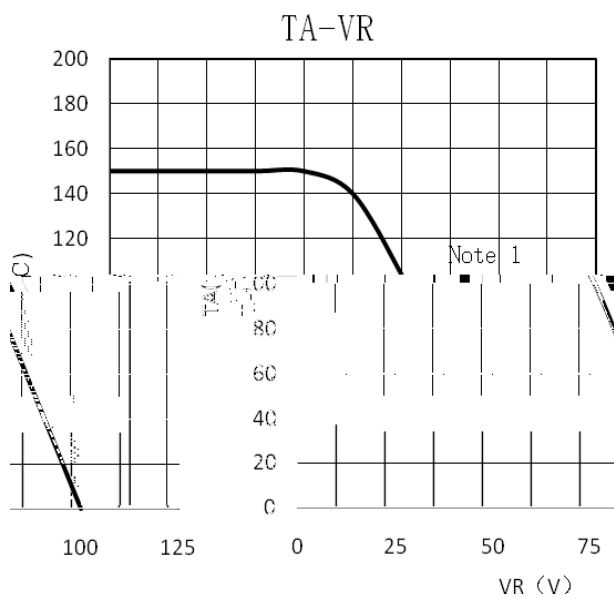

⌘ É Ø L f / Package Dimensions

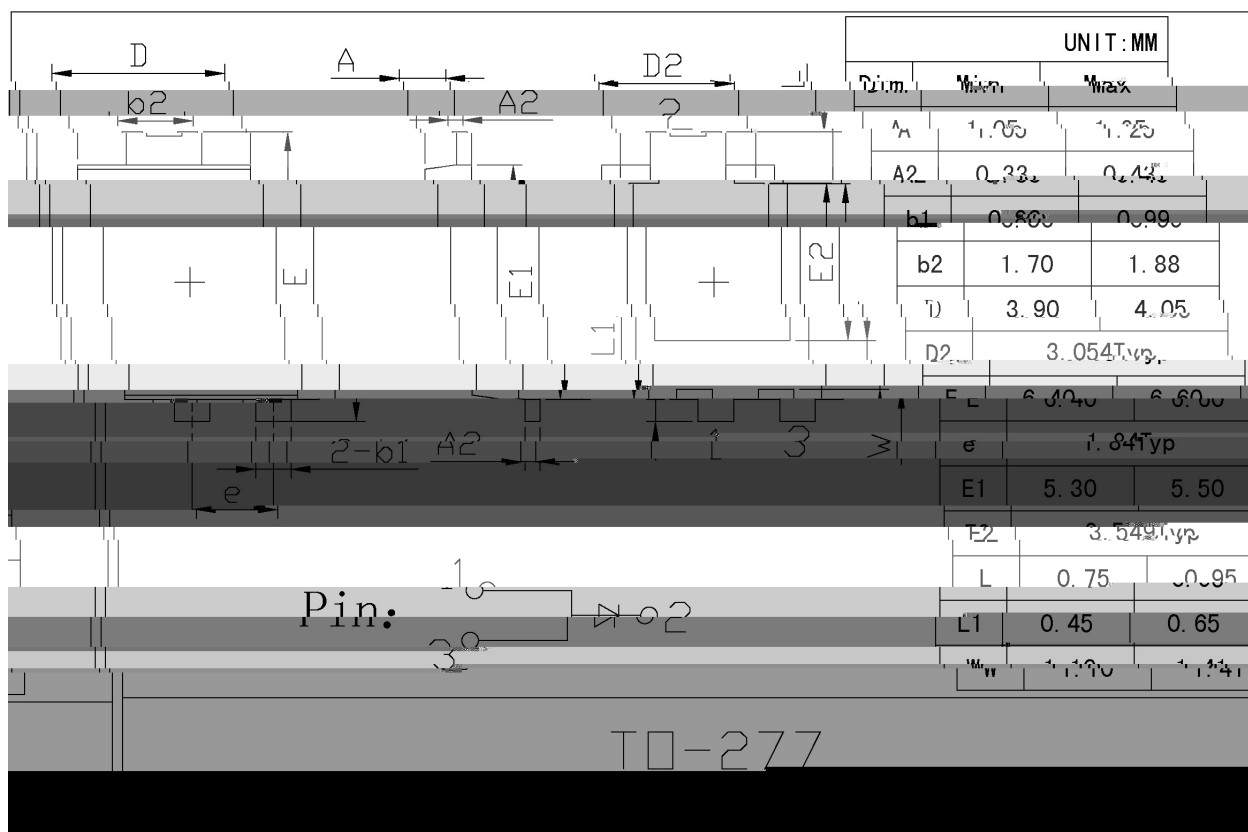

Thermal Resistance (R_{JA}) / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,



Note:

- | | | | |
|---|----------|-------------|---|
| 1 | 25 ~ 150 | 60 ~ 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 ~ 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

Packaging SPEC.

/ REEL

Package Type	Units		Dimension (unit mm ³)
	Units/Reel /	Reels/Inner Box /	