


!"#\$% #!"#\$
Rev.E Jan.-202



0.5A MBF
0.5A Surface Mount Glass Passivated Bridge Rectifier, MBF thin package。
&

100V~1000V 0.5A

Glass Passivated Chip Junction, Reverse Voltage:100to1000V, Forward Current: 0.5A, High Surge Current Capability, Designed for Surface Mount Application, Halogen free product.
&

General purpose.= N

& &

!"

3


ff


5.2145 420



& & . & & C96:9<0&'2G0;327;3&

MBF

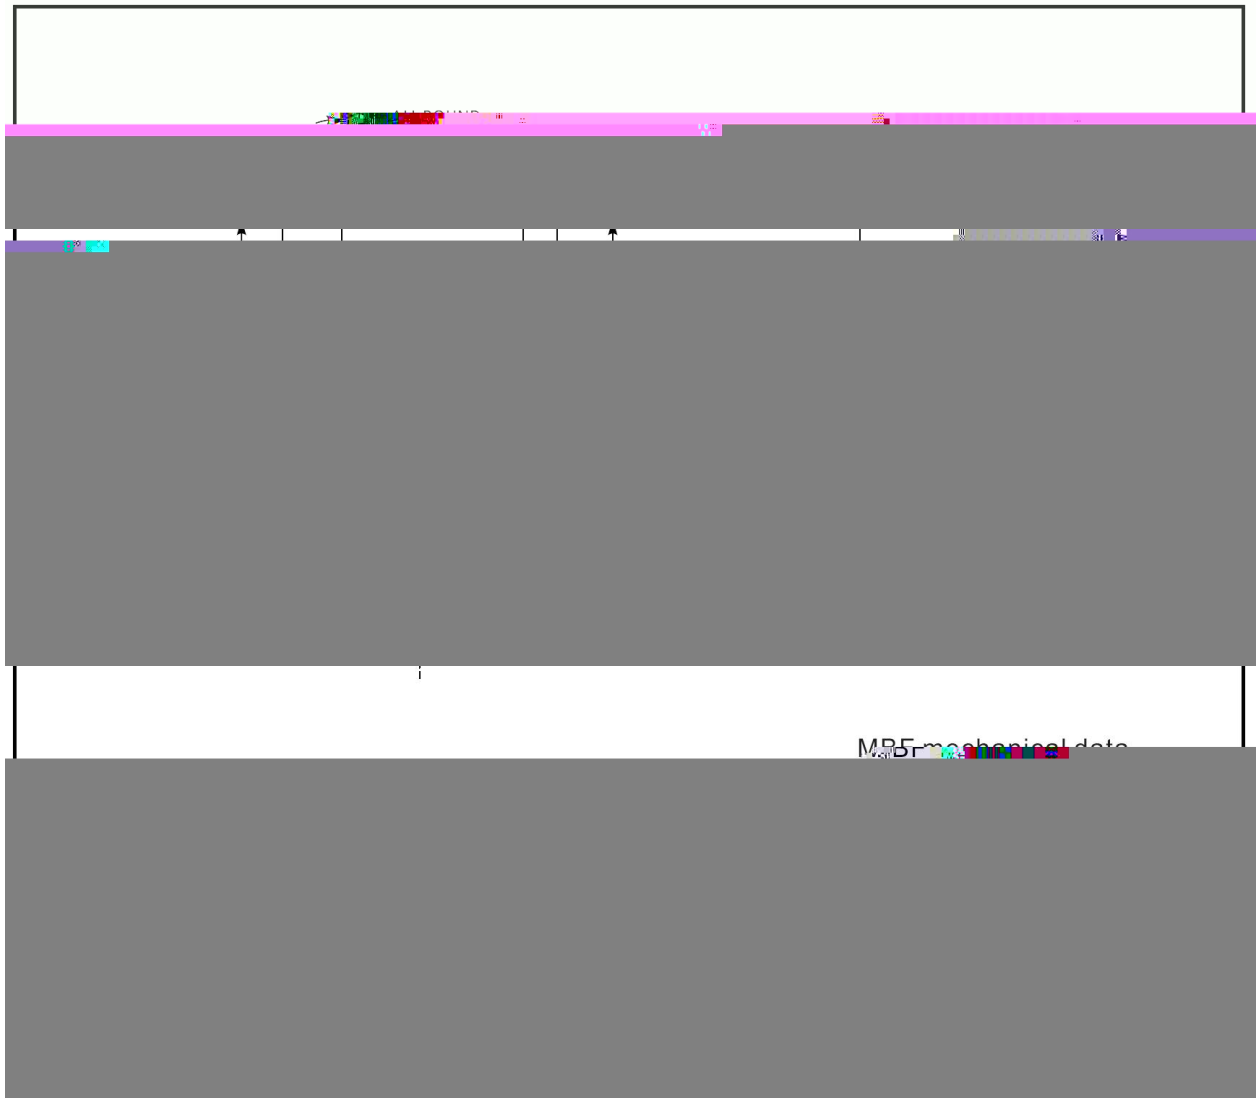




& & .& & 95:2;<&N;3>5?6>27;3&

Marking





& &

