

MBRB10200CT

Rev.G Dec.-2017

/ Descriptions

TO-263

Schottky Diode in a TO-263 Plastic Package.


/ Features

Low power loss, high efficiency.

/ Applications

For use in low voltage,high frequency inverters, free wheeling, and polarity protection applications.

/ Equivalent Circuit



/ Pinning



PIN1 Anode PIN 2 4 Cathode PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions.






Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Reverse Voltage	V_{RRM} V_{RWM} V_{RM}	200	V
DC Blocking Voltage	$V_{R(RMS)}$	140	V
Average forward rectified Current	$I_{F(AV)}$	2×5	A
Non Repetitive Peak Surge Current	I_{FSM}	120	A
Junction Temperature Range	$T_{J\ MAX}$	150	
Storage Temperature Range	T_{stg}	-65 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	$V_{(BR)R}$	$I_R=0.3mA$	200			V
Peak Forward Voltage	V_{FM}	$I_F=5.0A$ $T_J=25$		0.80	0.85	V
		$I_F=5.0A$ $T_J=125$		0.68	0.75	V
		$I_F=10A$ $T_J=25$		0.88	0.95	V
		$I_F=10A$ $T_J=125$		0.77	0.85	V
Instantaneous Reverse Current	I_R Note 1	$V_R=200V$ $T_J=25$			10	uA
		$V_R=150V$ $T_J=125$			1	mA
		$V_R=200V$ $T_J=125$			5	mA

/Notes

1.

/ Electrical Characteristic Curve

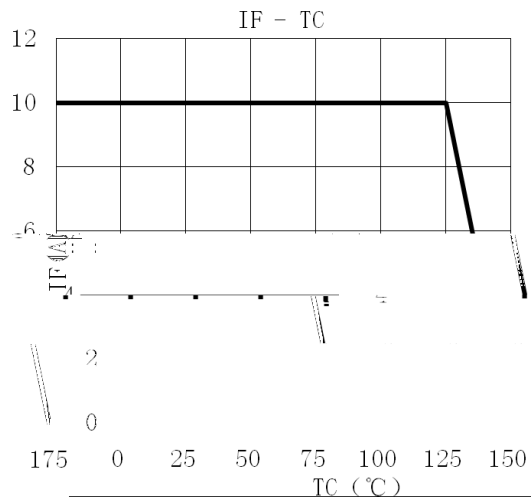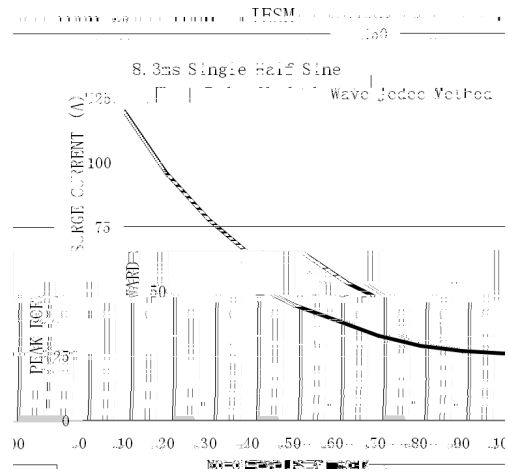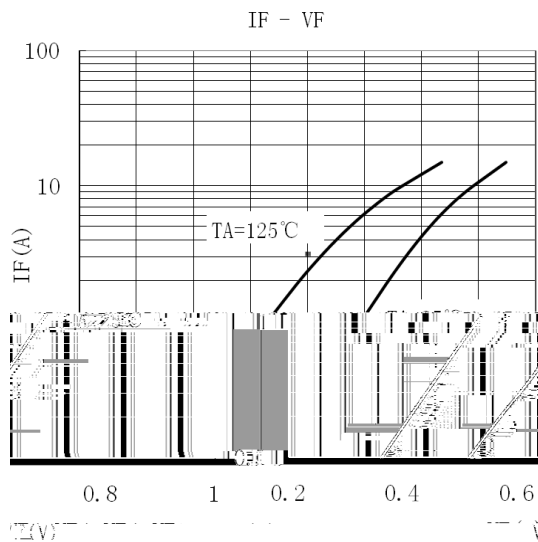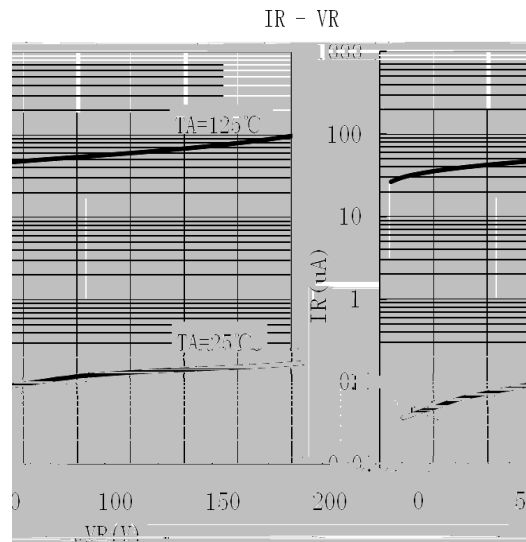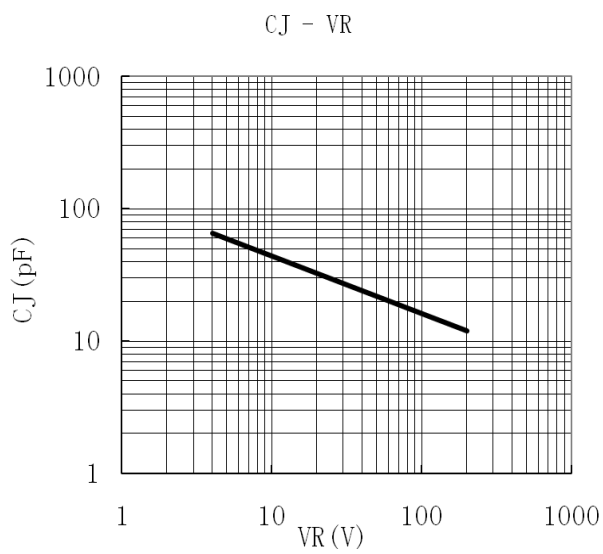

MBRB10200CT

Rev.G Dec.-2017




蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

/ Package Dimensions



/ Marking Instructions

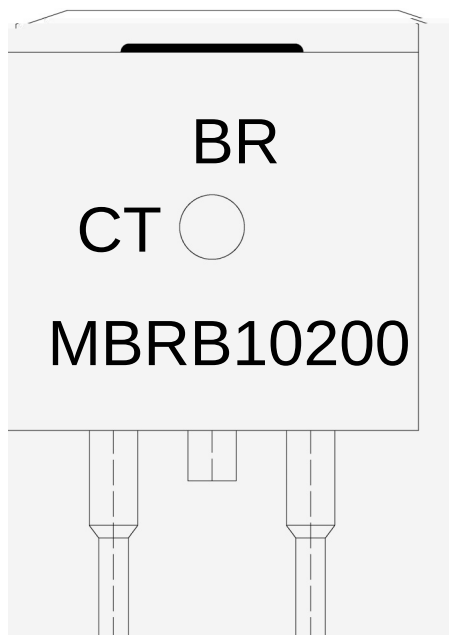

BR

MBRB10200

CT:

Note:

BR:

Company Code

MBRB10200

Product Type.

CT:

Internal Structure

****:

Lot No. Code, code change with Lot No.

