

5 é / Descriptions

: 5 .> / / x RK Ô ´ 8 â o
TO-252 Plastic package Schottky diode.


α a / Features

z 3 g 9 k z ô k k ä)í ä D }o
Low forward voltage drop,low power losses,High efficiency operation, HF Product.


Đ ÷ / Applications

9 ä ¨o z 9o Ý v v 8 â k Ò v 8 â k 8 â o
For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications.

Ã W] Ô · / Equivalent Circuit



• Ô - æ / Pinning

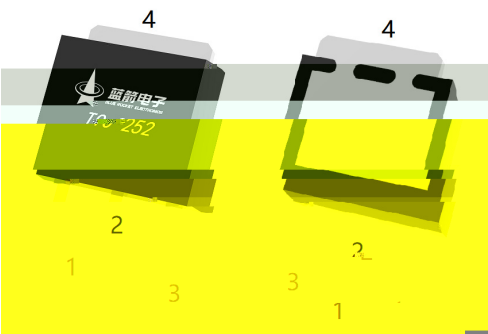

PIN1 yAnode PIN 2,4 yCathode PIN 3 yAnode

, M V / Marking

- ~ “ ¢o
See Marking Instructions.

MBRD1040

Rev.H Oct.-2024



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

@ Parameter	Z Symbol	Rating	% y Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Reverse Voltage	V_{RRM} V_{RWM} V_{DC}	40	V
RMS Reverse Voltage	V_{RMS}	31.5	V
Average forward rectified Current	$I_{F(AV)}$	1 h 10	A
Non Repetitive Peak Surge Current	I_{FSM}	100	A
Thermal Resistance Junction to Case	R_{Jc}	2	/W
Junction and Storage Temperature Range	$T_j T_{stg}$	-55~+150	

Ø □ =) ☉ / Package Dimensions

