

5 é / Descriptions

:5 .> // x RK Ô Â 8 â 'ož


□ a / Features

C ô z k | ä ä k —) (D } ož


Đ ÷ / Applications

9 ä È o • z 9 o • Ý v ... v 8 â ' k Ò v 8 â ' k ' 8 â ' ož

Ã W] Ô · / Equivalent Circuit



• Ô - æ / Pinning

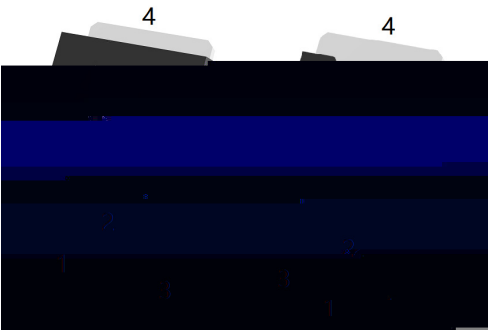

y

y

y






, M V / Marking

• - ~ a ¢ ož


@ f	... Z	f >	% y
	Ä Å		

@ f	... Z	y i Ú ^	Â 4 >	Á ° >	Â Ý >	% y
	Ä Å					

Electrical Characteristic Curve

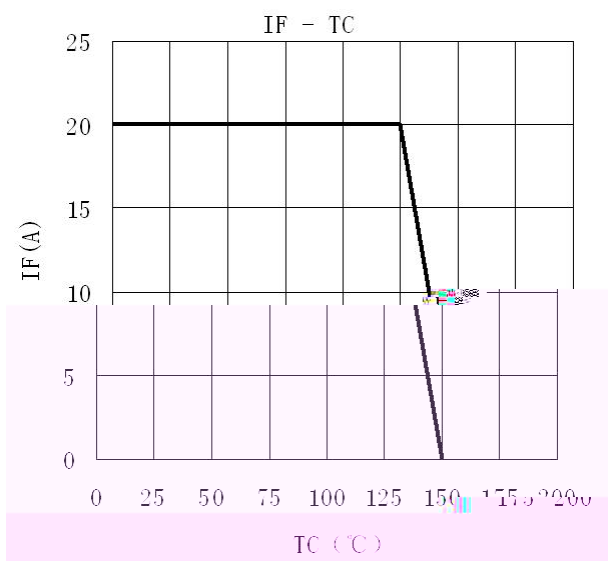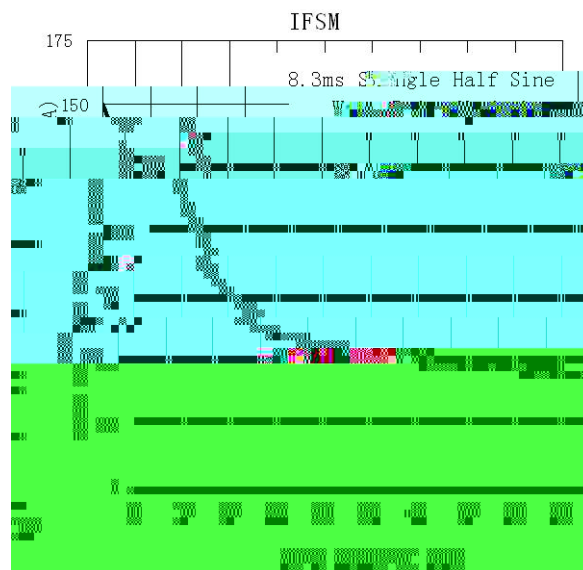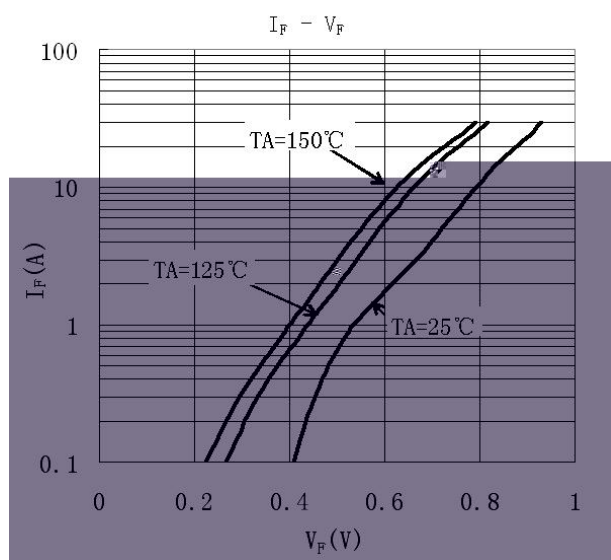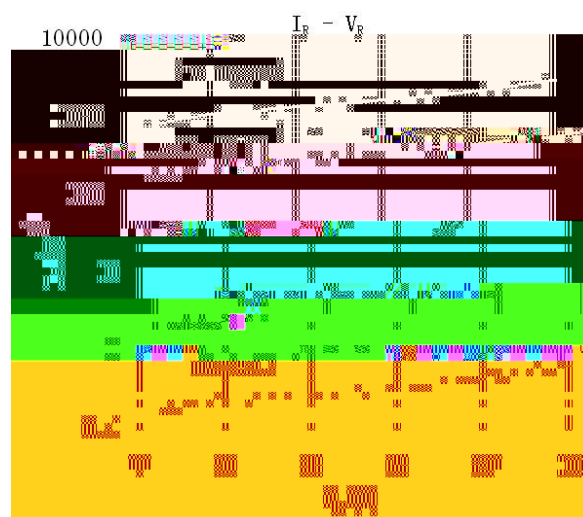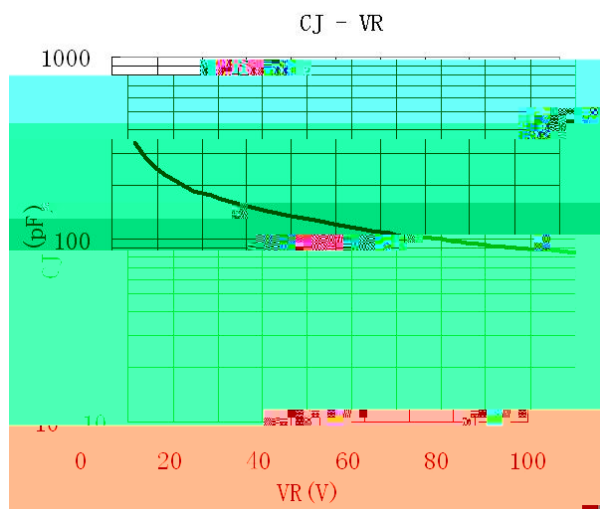

Ø α =) ¢ / Package Dimensions

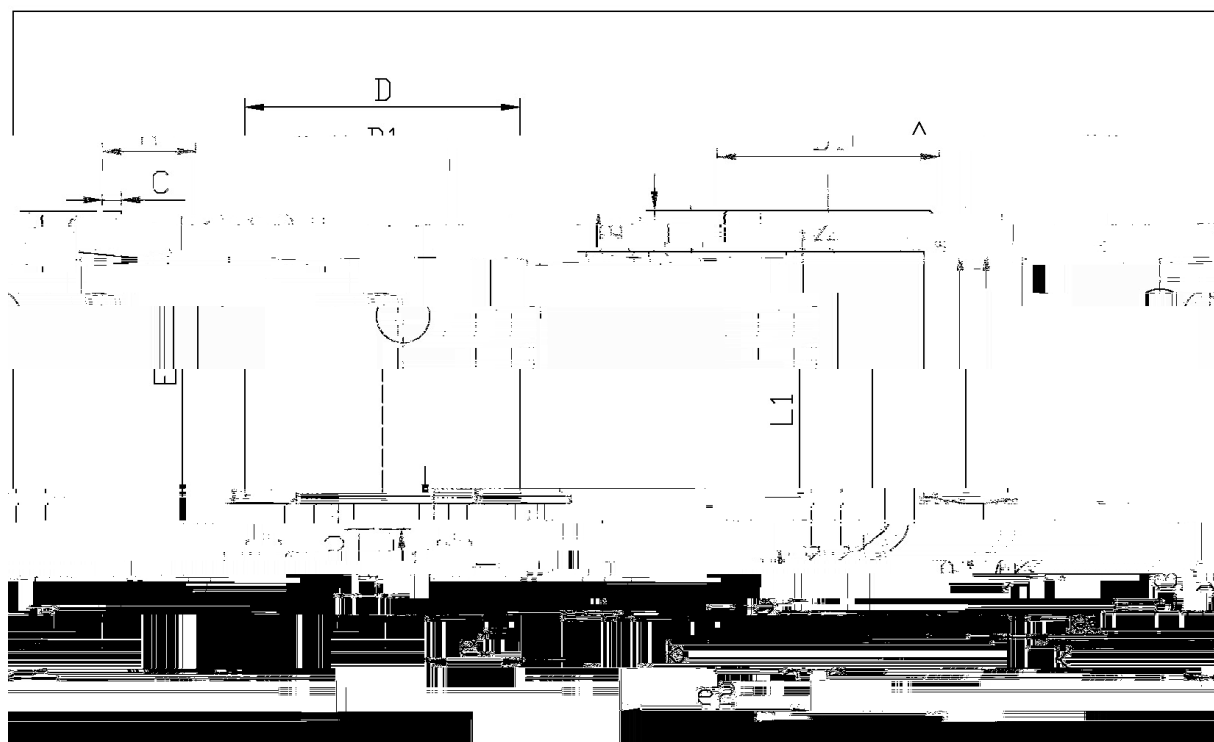


单位: mm

Symbol I		Symbol J	
Max	Min	Max	Min
6.25	3.30	2.40	5.95
0.50	0.90	4.43	4.73
0.45	0.55	9.45	9.95
0.25	0.55	0.25	0.40
0.60	0.60	0.25	0.25
5.16	5.56	0.00	0.00

— 252 —

, M y f / Marking Instructions

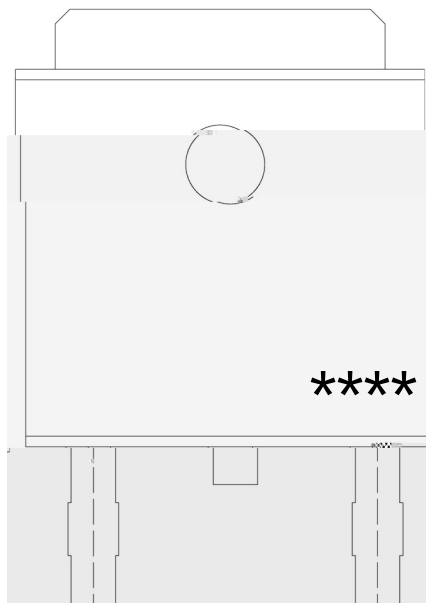

a ¢ y

(8 y

3 (8 *

$$):$$
 y

3. [WA

$$D \}^0 Z$$

Ä B È ã W A

ÿD ZW A k š ÿD ZJ

 y

šWD t...•Ž¢ (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

a ¢ y

o•Ä½“† ½ - k ž • ½ -

o•Q>“† r - k ž • 4 Ò r r - r

o•D N ò i Ò 0 ,† ½ - -

ÂD /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

“† y r - ž • y r

G P á / Packaging SPEC.

2 & x

7>û ~ E	;>û H					;>û p .			Æ
	Units/Reel / --	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Box	ç