
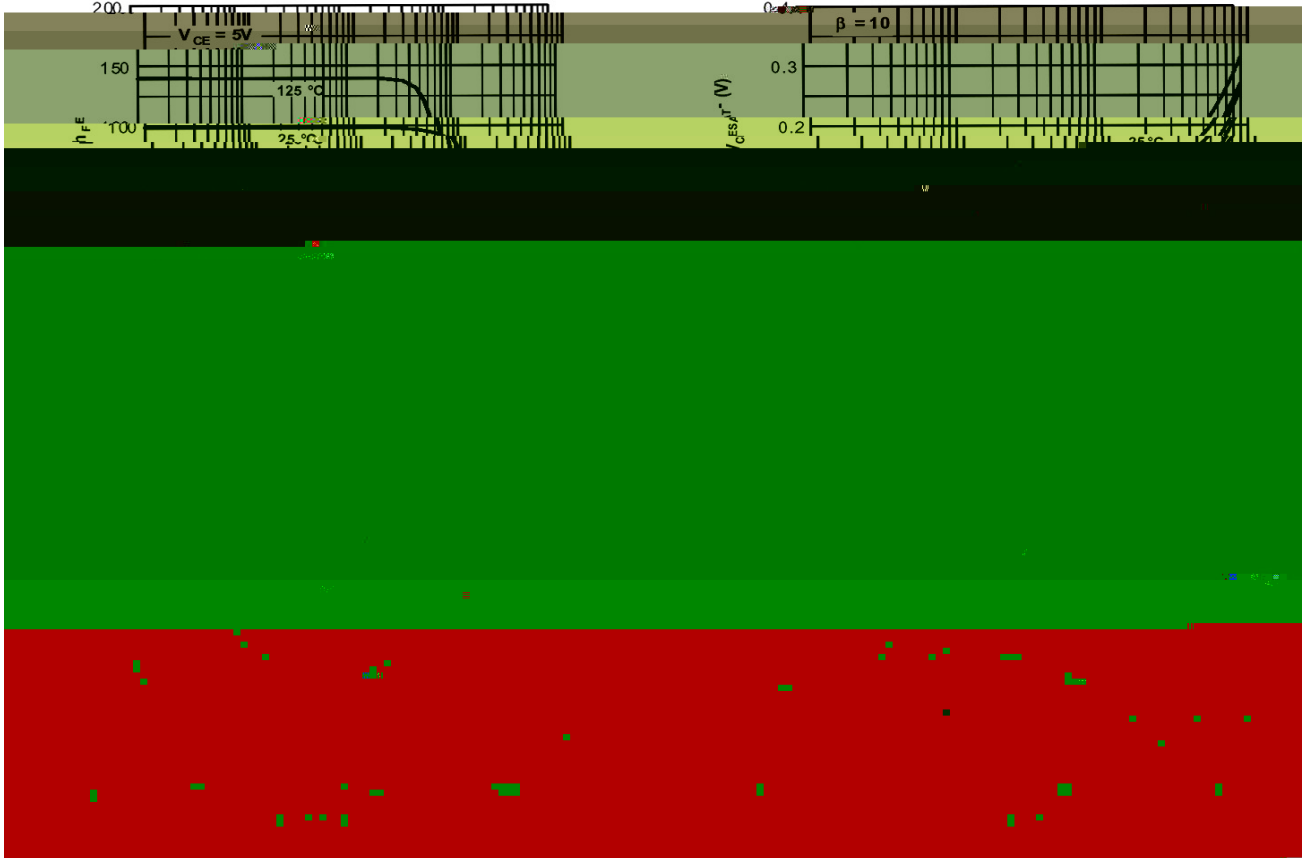


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	180	V
Collector to Emitter Voltage	V_{CEO}	160	V
Emitter to Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous	I_C	600	mA
Base Current - Continuous	I_B	300	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=180V$ $I_E=0$			0.1	A
Emitter to Base Current	I_{EBO}	$V_{EB}=6.0V$ $I_C=0$			0.1	A


三极管

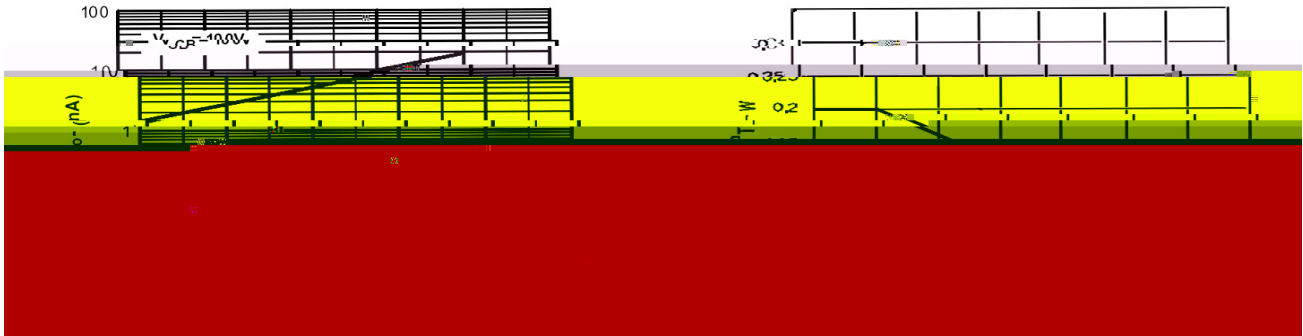


尺寸标注

STT-323

单位: mm

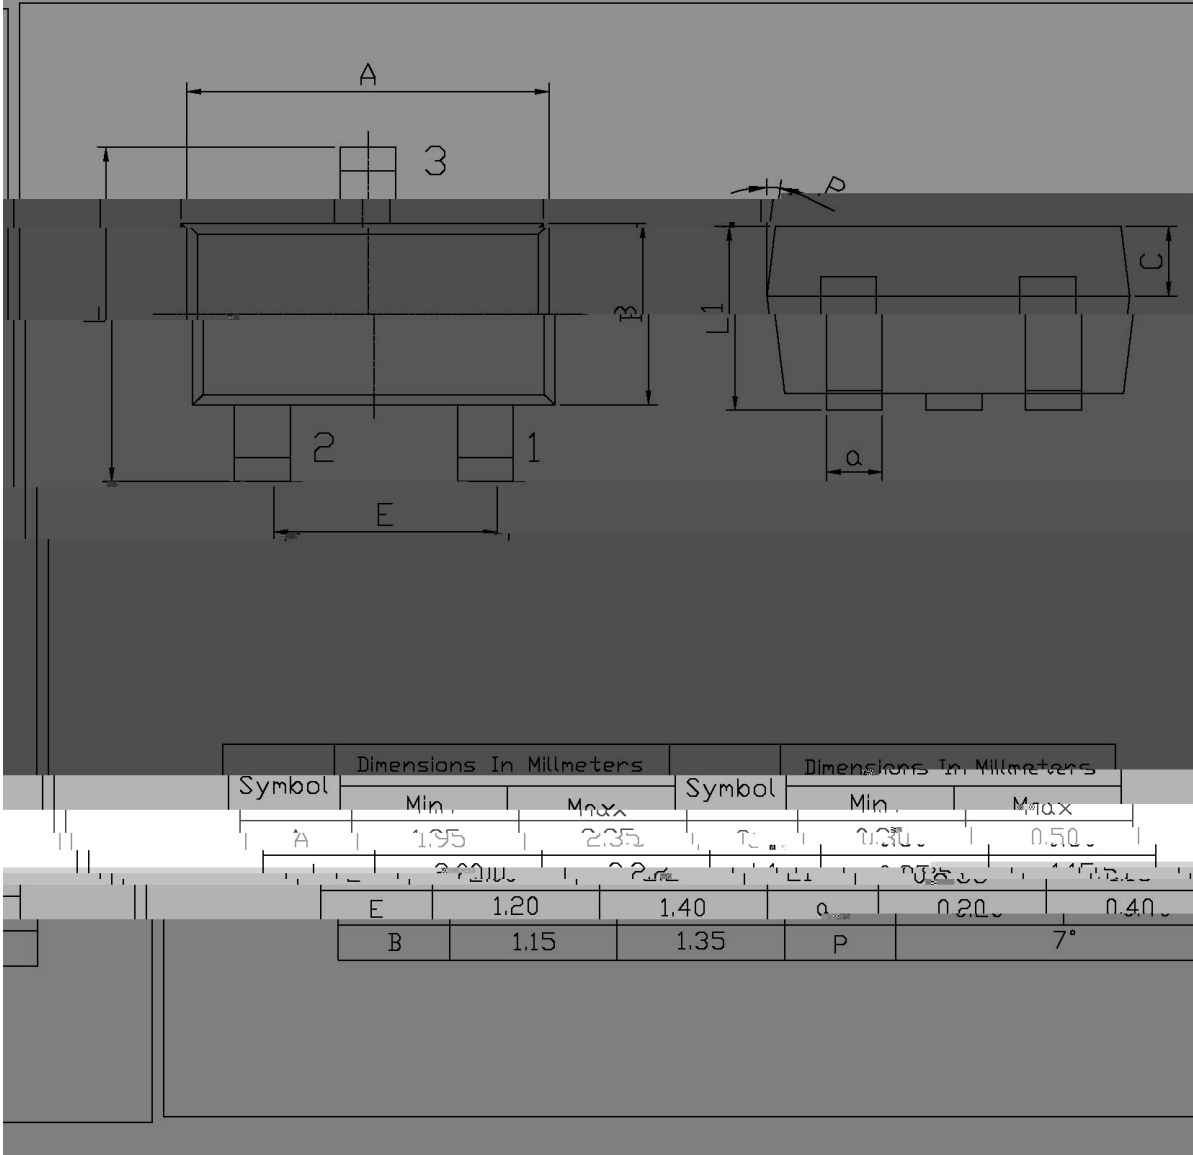

1. 外形

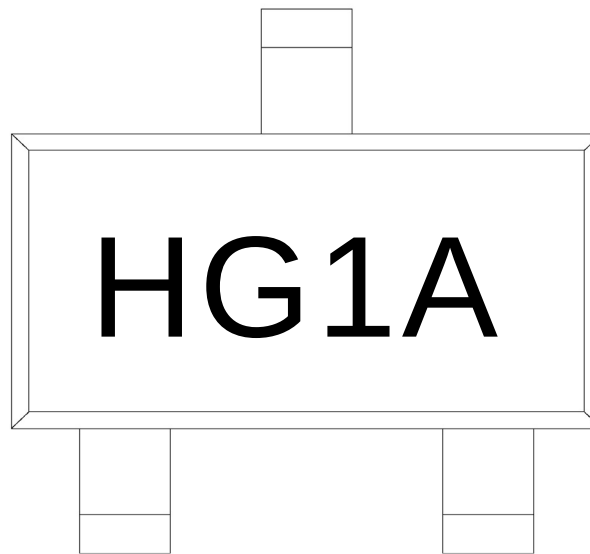

H

G1

A h_{FE}


Note:

H: Company Code.

G1 Product Type.

A h_{FE} Classifications Symbol

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulq j+Se0l uhh,

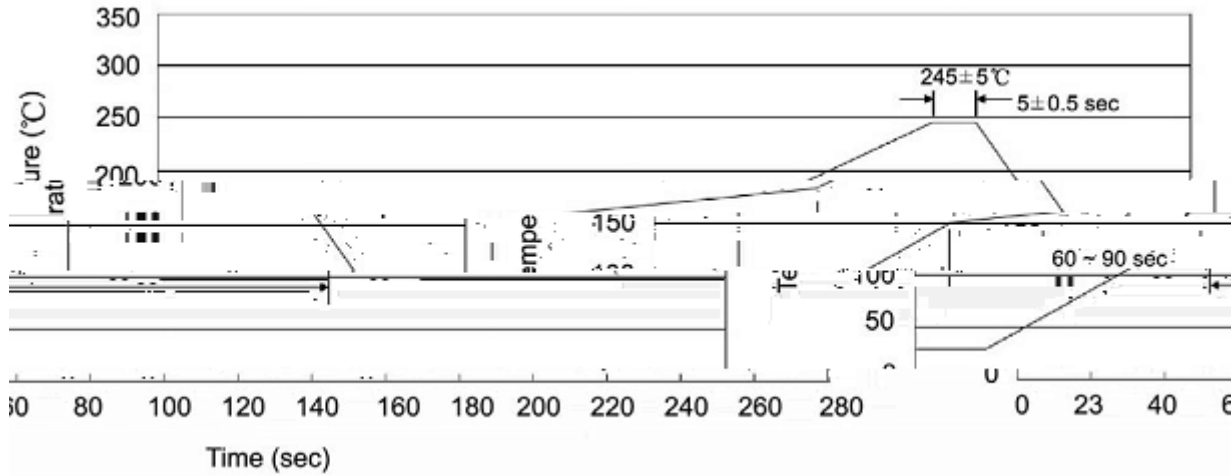

Note:

- 1251506090sec;

2245550.5sec;

3210/sec.
- 1.Preheating:25~150, Time:60~90sec.

2.Peak Temp.:2455, Duration:50.5sec.

3. Cooling Speed: 2~10 /sec.

4 0 q 1 Y T

260 510 1 sec.Temp.:260±5Time:10±1 sec

9 E 1

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

ä v L Q