

📄 / Descriptions

SOT-23 NPN Silicon NPN transistor in a SOT-23 Plastic Package.


🔑 / Features

High voltage, Low saturation voltage, low collector capacitance output, complementary pair with MMBTA92.


🔧 / Applications

High voltage control circuit.

🔌 / Equivalent Circuit



📏 / Pinning




PIN1 Base PIN 2 Emitter PIN 3 Collector

🏷️ / Marking


h_{FE} Range	>40
Marking	H1D

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	300	V
Collector to Emitter Voltage	V_{CEO}	300	V


三极管 / Electrical Characteristic Curve

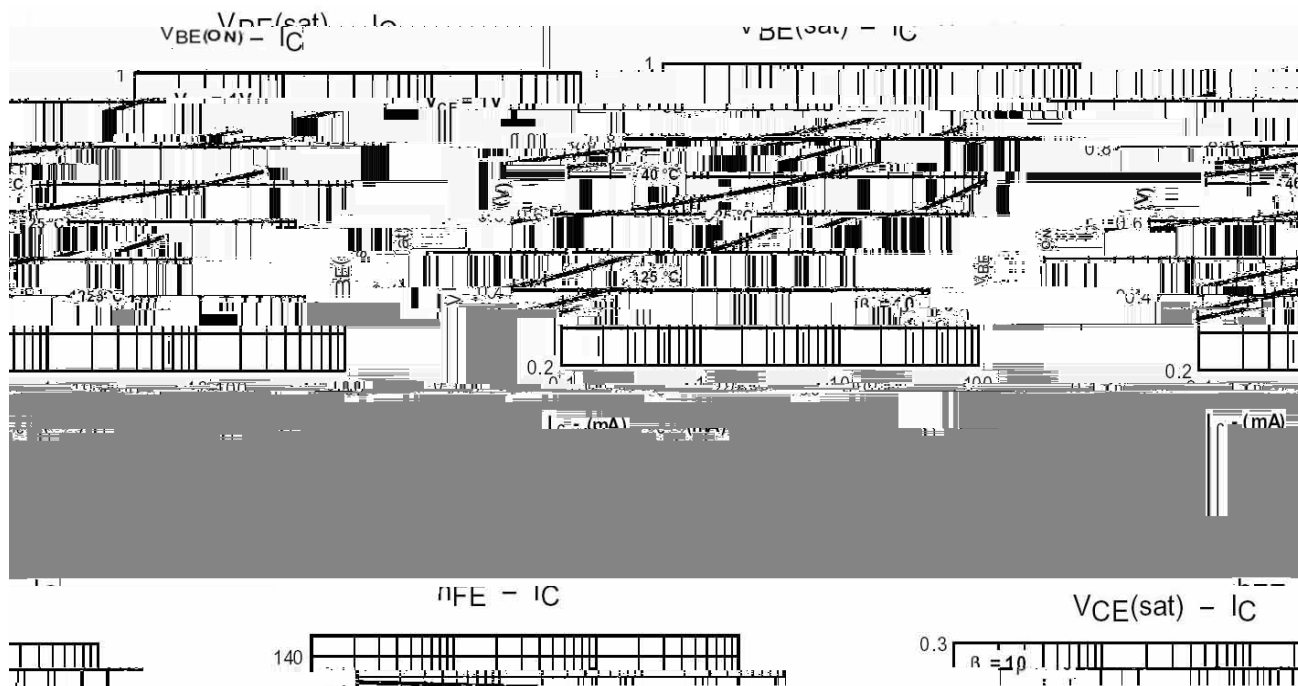


⌘ É Ò Ì ð / Package Dimensions

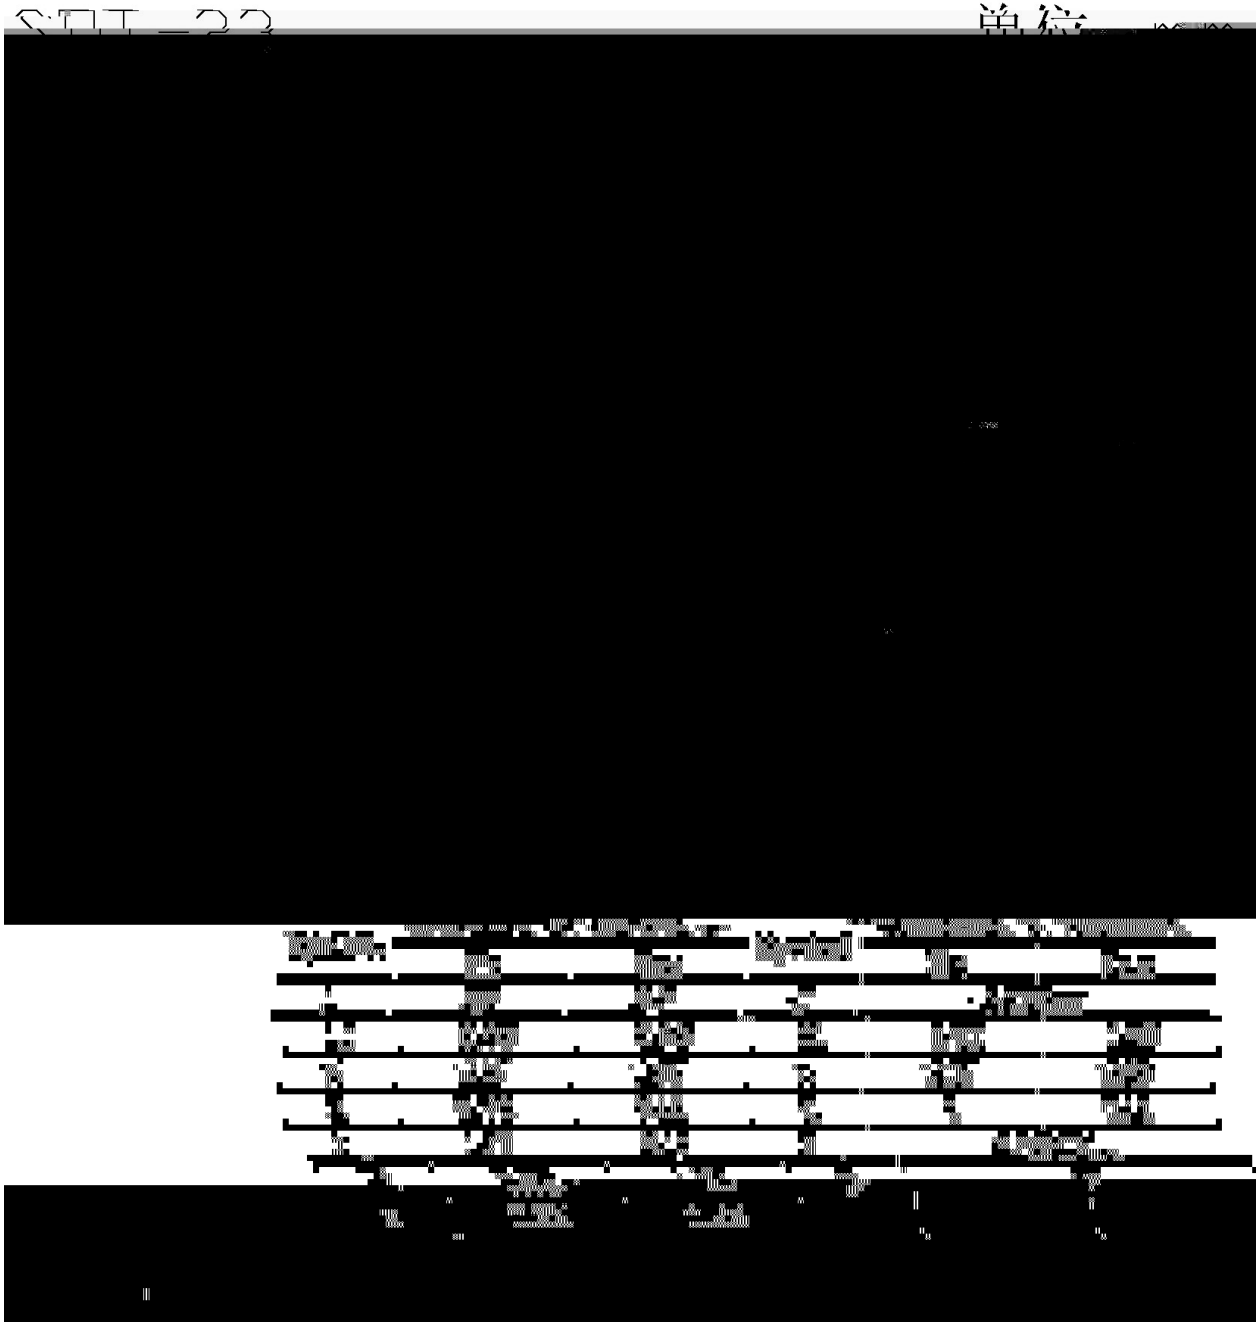

4. L^Q

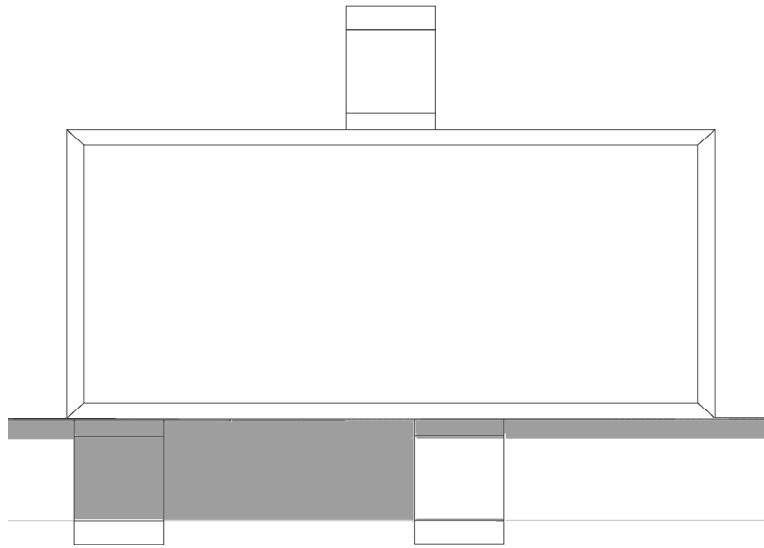

Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

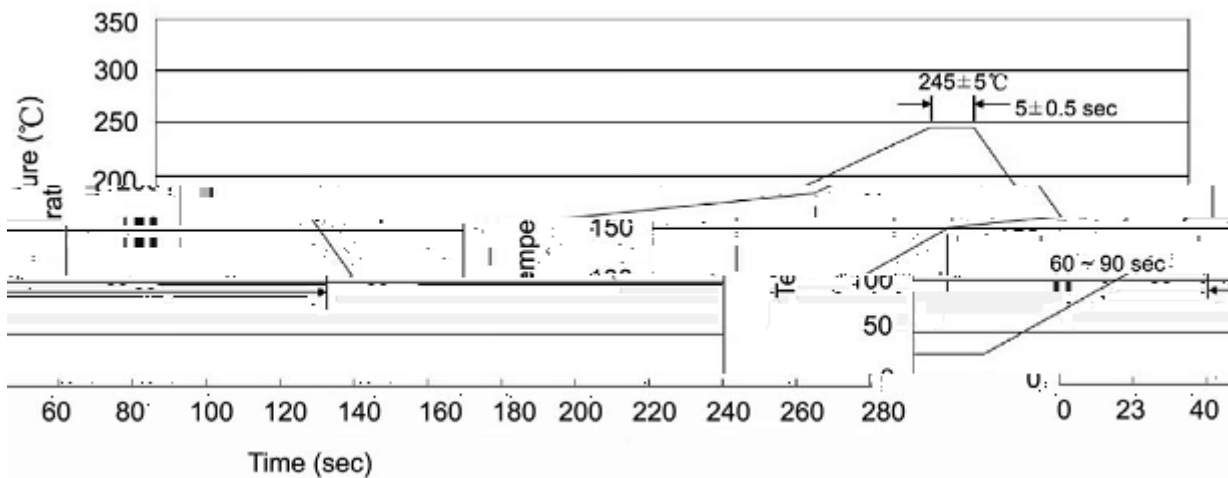

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ρ ×8	180×120×180	390×385×205

Notices