


Rev.F Apr.-2017

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-300	V
Collector to Emitter Voltage	V_{CEO}	-300	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-500	mA
Collector Power Dissipation	P_C	350	mW
Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -100\text{ A}$ $I_E = 0$	-300			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C = -1.0\text{ mA}$ $I_B = 0$	-300			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E = -100\text{ A}$ $I_C = 0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -200\text{ V}$ $I_E = 0$				

Rev.F Apr.-2017

三极管

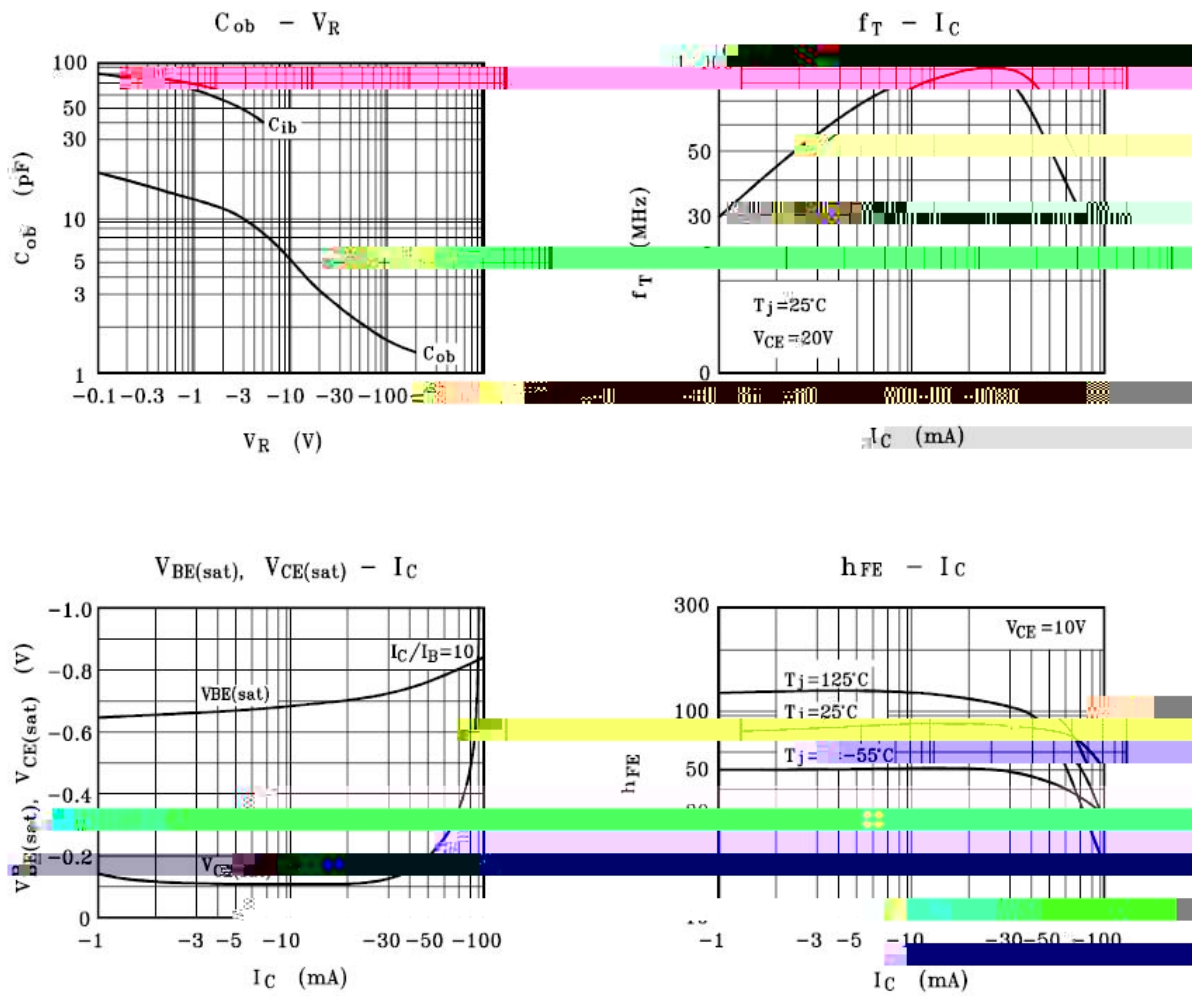

“ÉÒŁ f


ΣΤΤ-22

单位: 100/100



Rev.F Apr.-2017

温度曲线图 Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

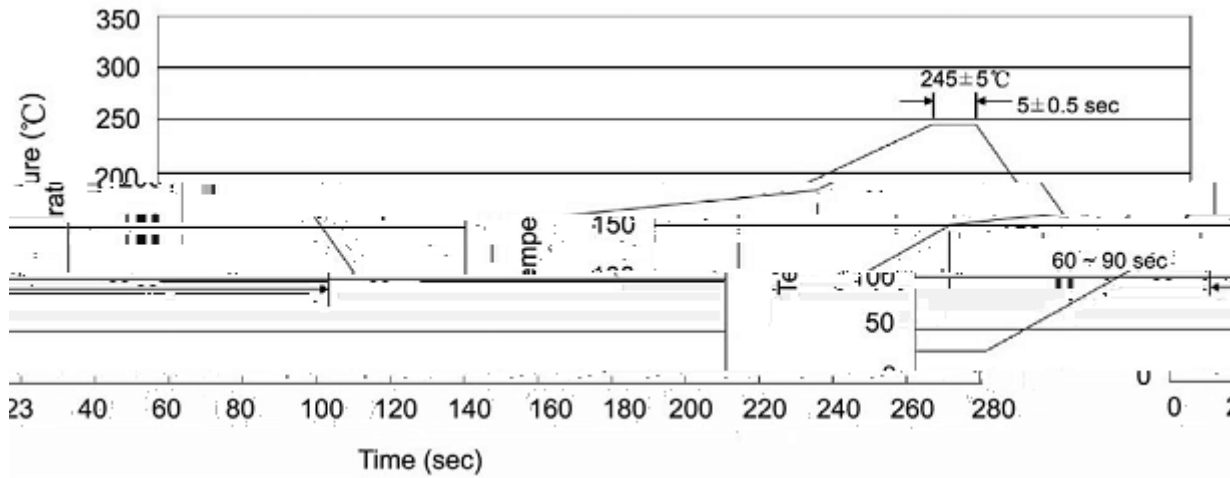

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

温度曲线图

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

温度曲线图

/ REEL

Package Type

Units