

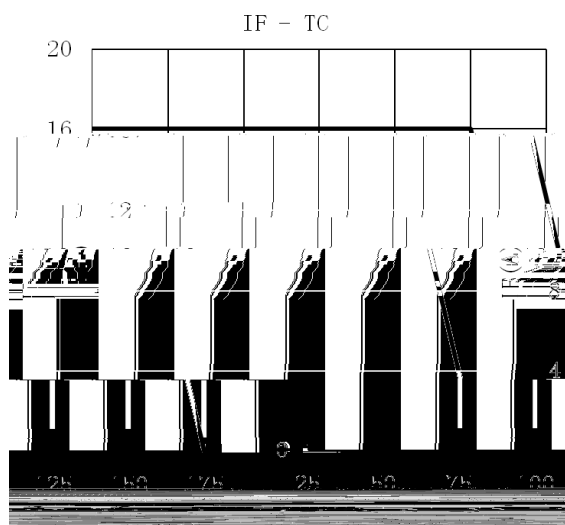
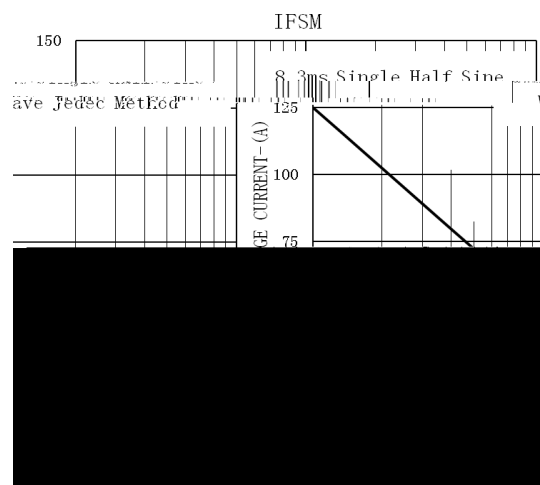
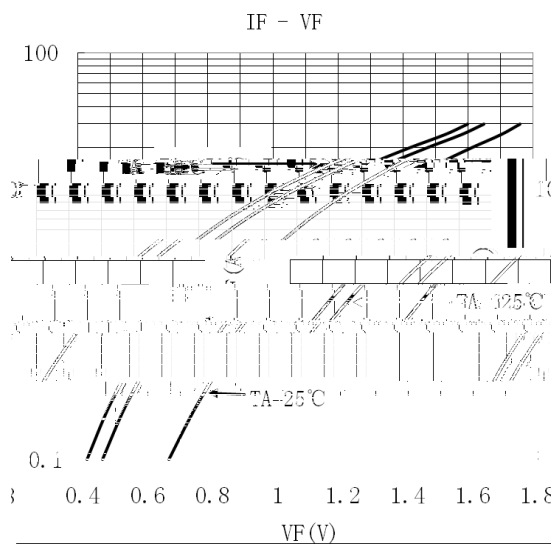


Rev.F May.-2016

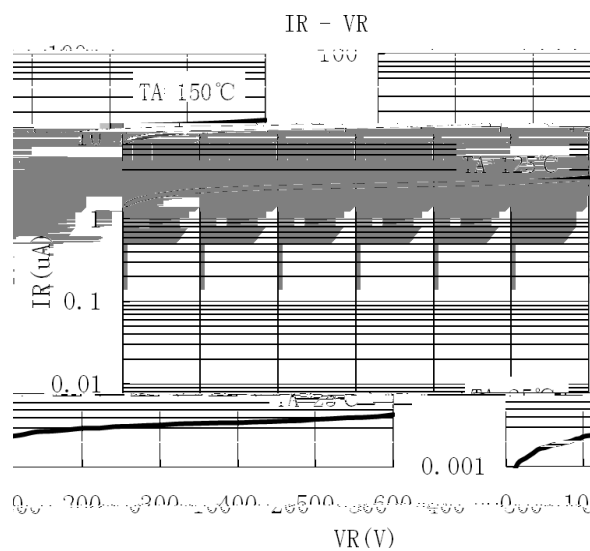


<http://www.fsbrec.com>

/ Electrical Characteristic Curve

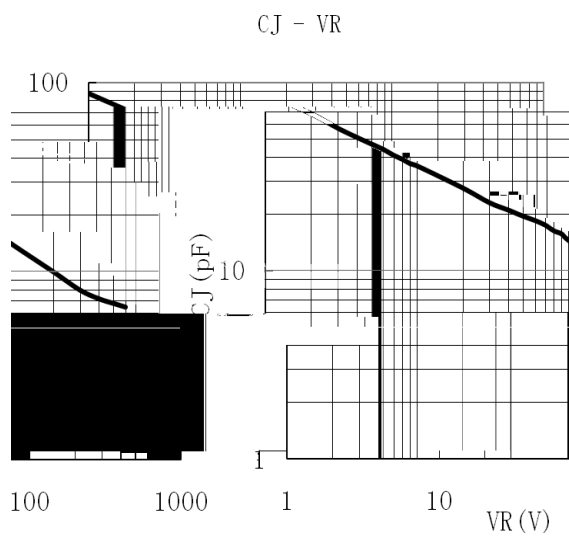


/ Package Dimensions

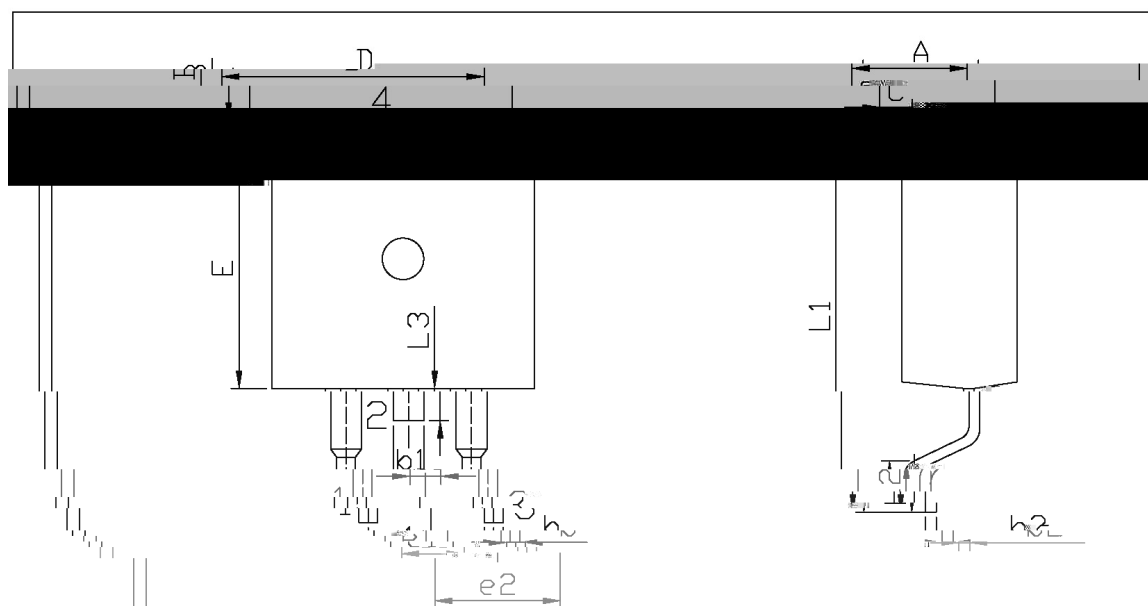

单位: m

Dimensions in Millimeters		Dimensions in Millimeters	
Max	Min	Max	Min
9.40	4.30	4.70	9.00
2.74	1.00	1.40	2.24

/ Marking Instructions

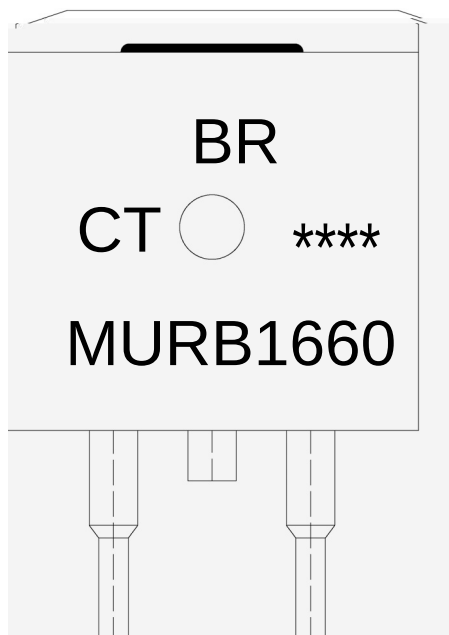

BR

MURB1660

CT:

Note:


BR: Company Code.

MURB1660 Product Type.

CT: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

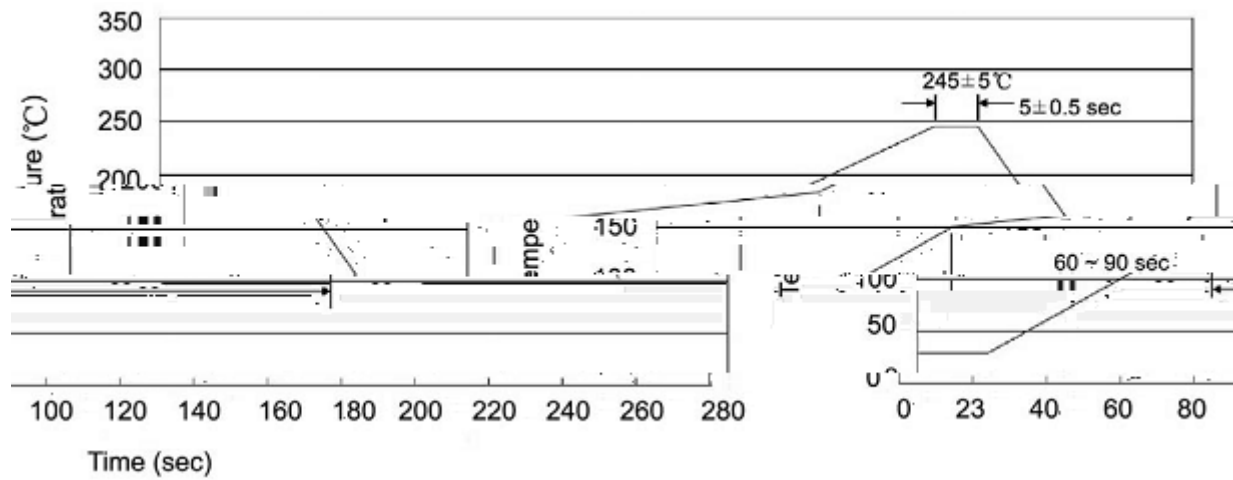

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-263	800	1	800	5	4,000	13 ×24	360×360×50	385×257×392

/ TUBE

Package Type 封装形式	Units/Tube 只/套管	Units 包装数量	Dimension 包装尺寸 (unit: mm ³)
----------------------	--------------------	------------	---