


MURF2020CT


Rev.F Mar.-2016

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	200	V
RMS Voltage	V_{RMS}	140	V
DC Blocking Voltage	V_{DC}	200	V
Average Forward Current	I_F	2×10	A
Non Repetitive Peak Surge Current	I_{FSM}	120	A
Thermal Resistance Junction to Case	R_{JC}	3.3	/W
Operating Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Package Dimensions

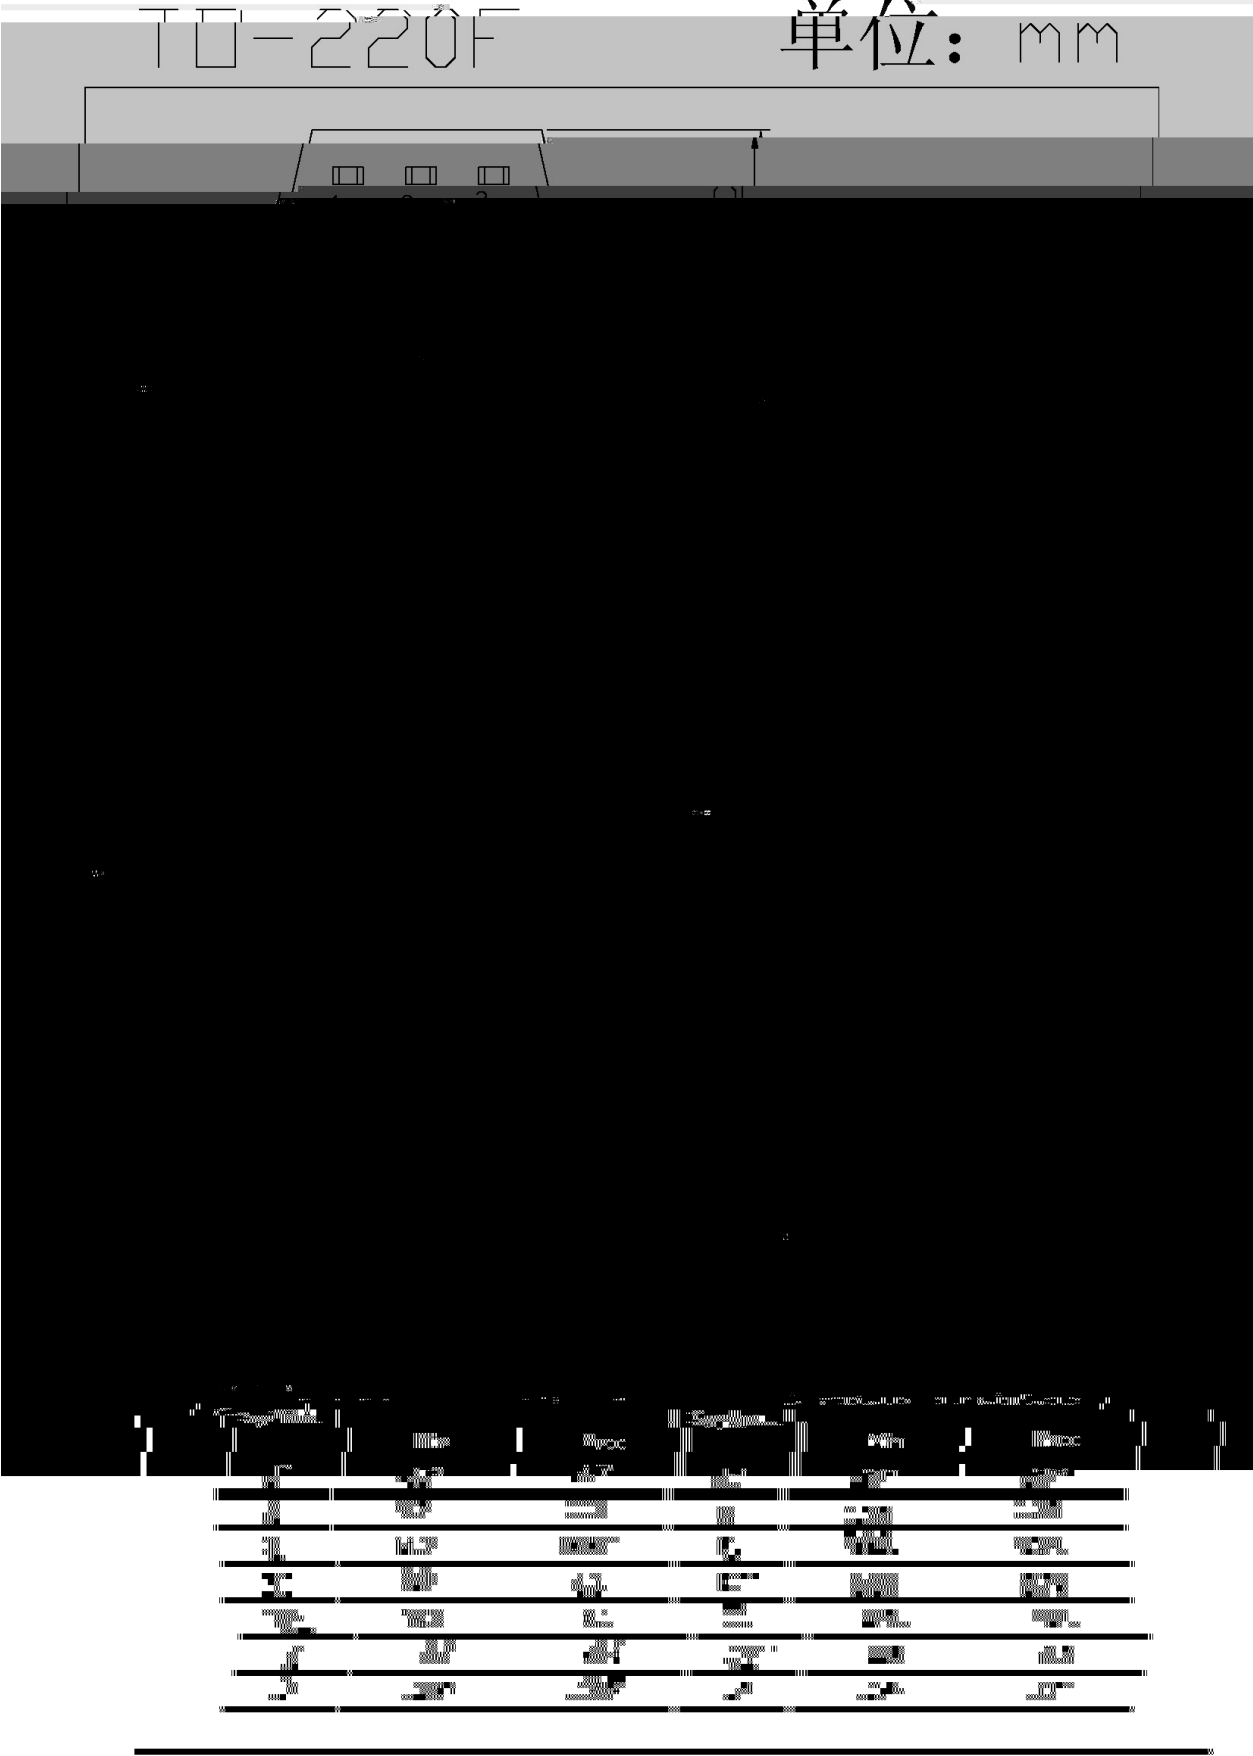

/ Marking Instructions

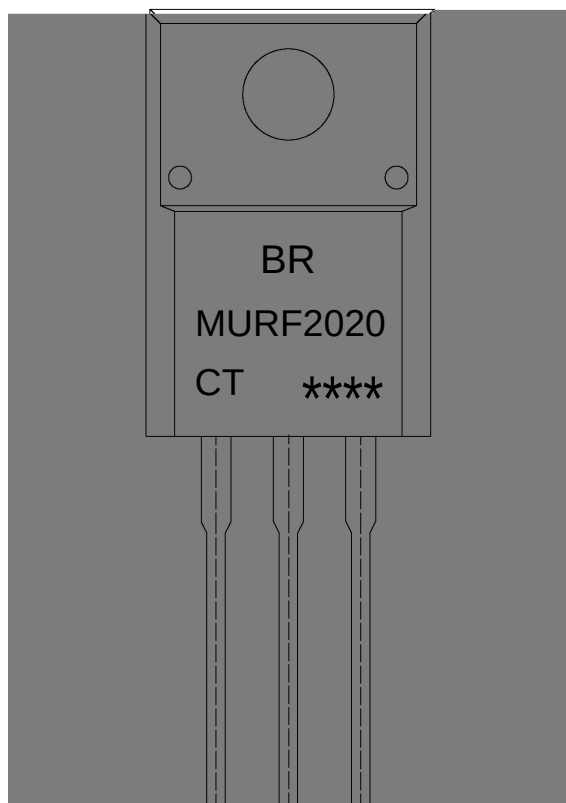

BR

MURF2020

CT:

Note:

BR:

Company Code

MURF2020:

Product Type.

CT:

Internal Structure

****:

Lot No. Code, code change with Lot No.

