




2017-10		3		

 Ta= 65℃改为 Ta= 125℃，更新 Ta 曲线图，C_i由 40pF 更新为 30pF，R

RS2AW~RS2MW
Rev.F Jul

Parameter	Symbol	Rating							Unit
		RS2AW	RS2BW	RS2DW	RS2GW	RS2JW	RS2KW	RS2MW	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V

0 8 9 = > ? / Electrical Characteristic Curve

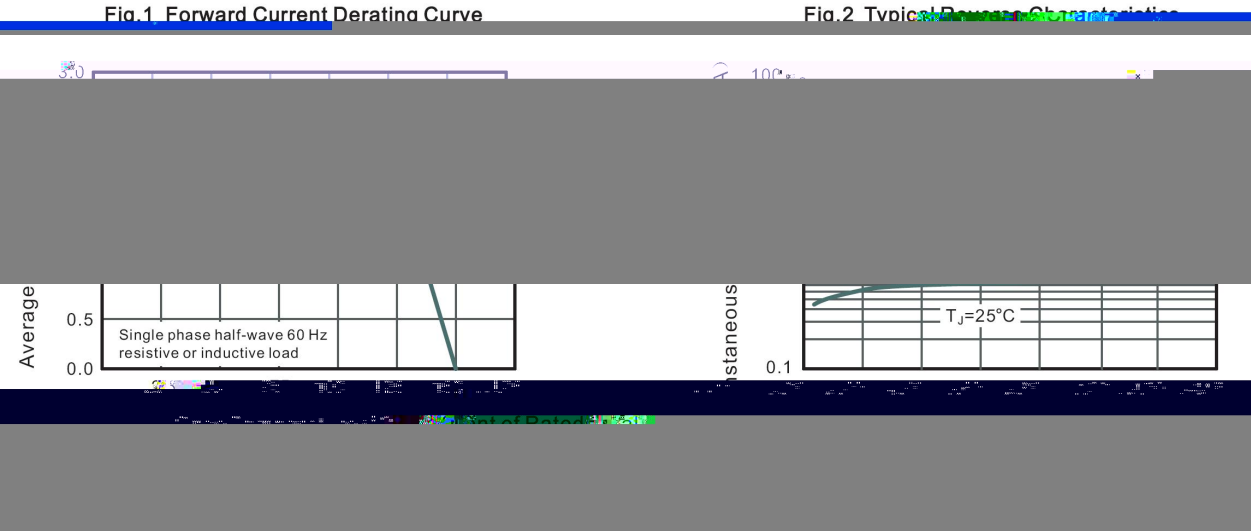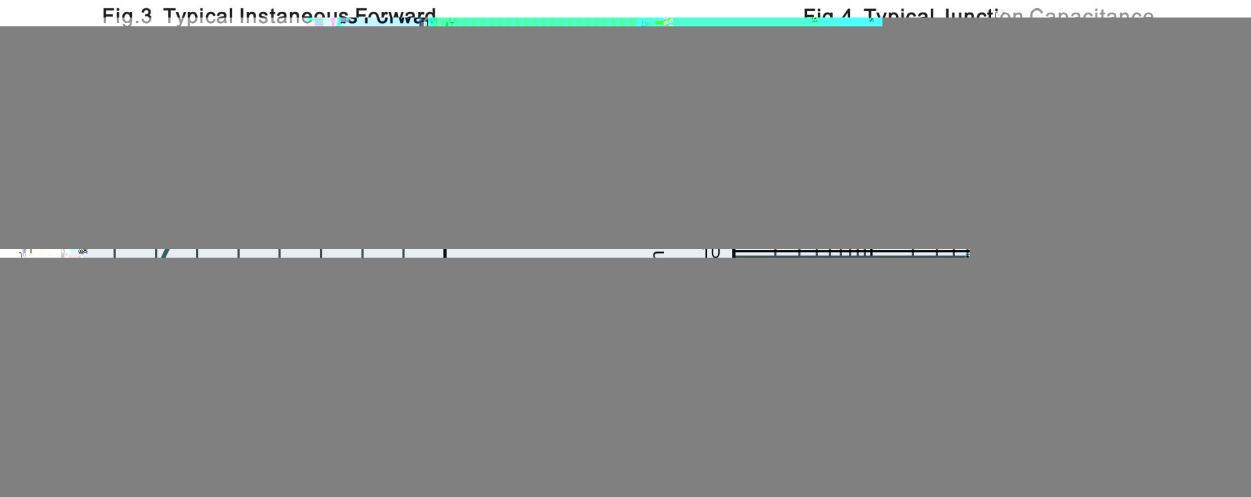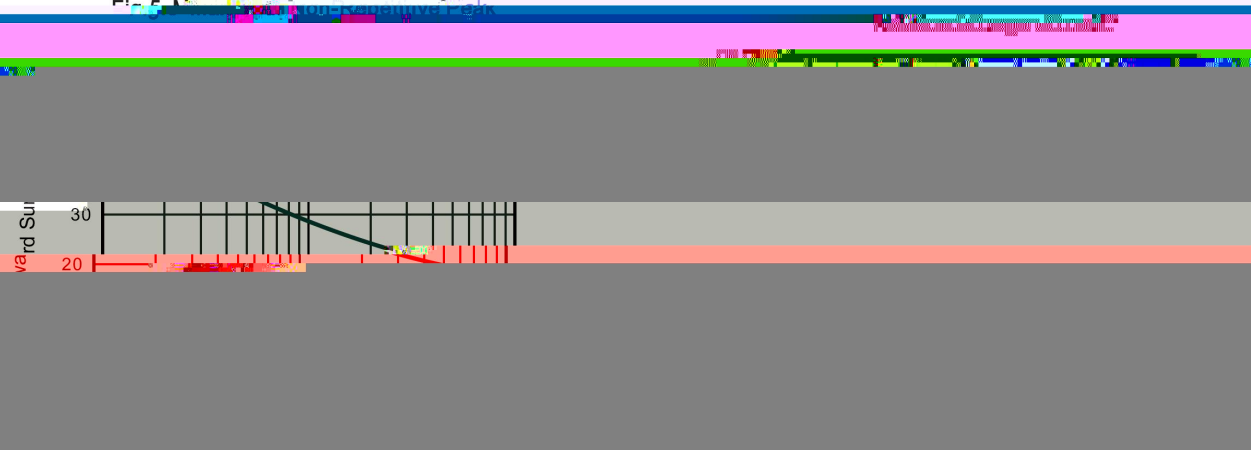


RS2AW~RS2MW

Rev.F Jul.-



H I J K L = > ? (M N) / O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

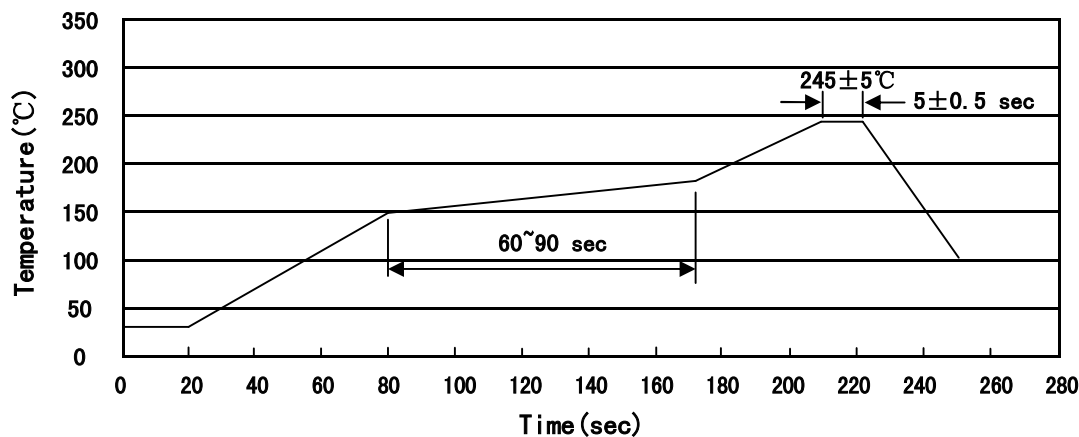

Note:

1. Preheating: 150~180°C, Time: 60~90sec.
2. Peak Temp.: 245±5°C, Duration: 5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

h J i j k l m n / Resistance to Soldering Heat Test Conditions

260±5°C

10±1 sec.

Temp.: 260±5°C

Time: 10±1 sec

o p q r / Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOD-123FL	3000	8	24000	6	144000	7" × 8	185X180X105	390X385X205

s * D E / Notices