


RS5AC~RS5MC

Rev.B Feb.-2021



DATA SHEET

! / Revised record

A	2019-7-25	ALL	SMC-RS5AC_RS5MC		
B	2021-2-9	7			


RS5AC~RS5MC

Rev.B Feb.-R

|



Rev.B Feb.-2021


Rev.B Feb.-2021




Parameter	Symbol	Rating	Unit
		RS5AC RS5BC RS5DC RS5GC RS5JC RS5KC RS5MC	
q0 SC 38299072.m.56 382 6 70 .1			

0 8 9 = > ? / Electrical Characteristic Curve

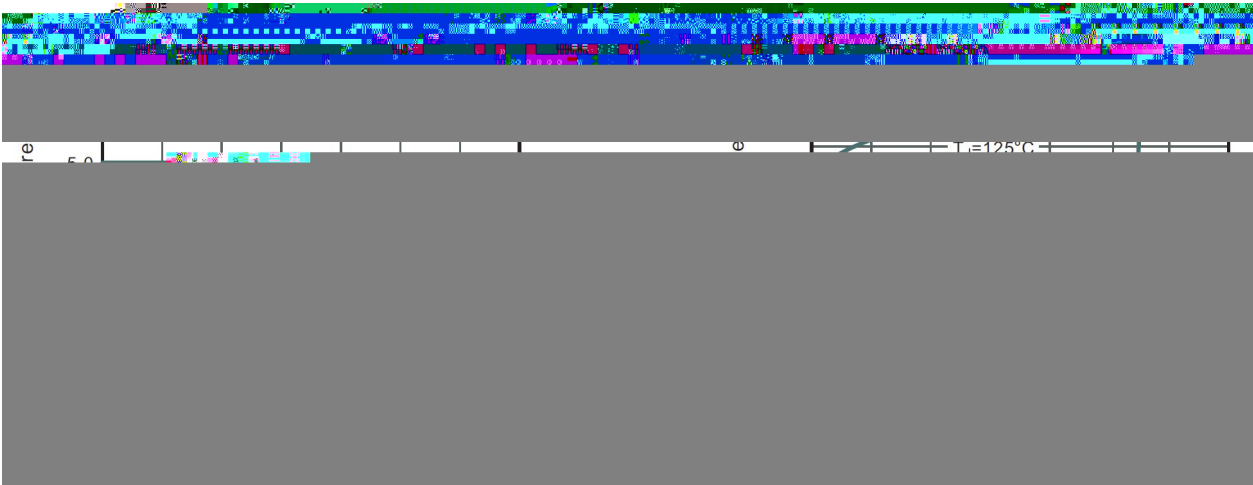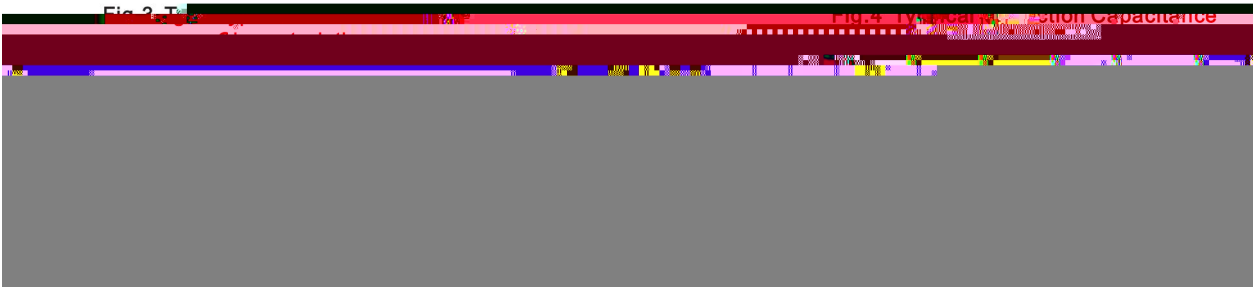




@ A B C ? / Package Dimensions

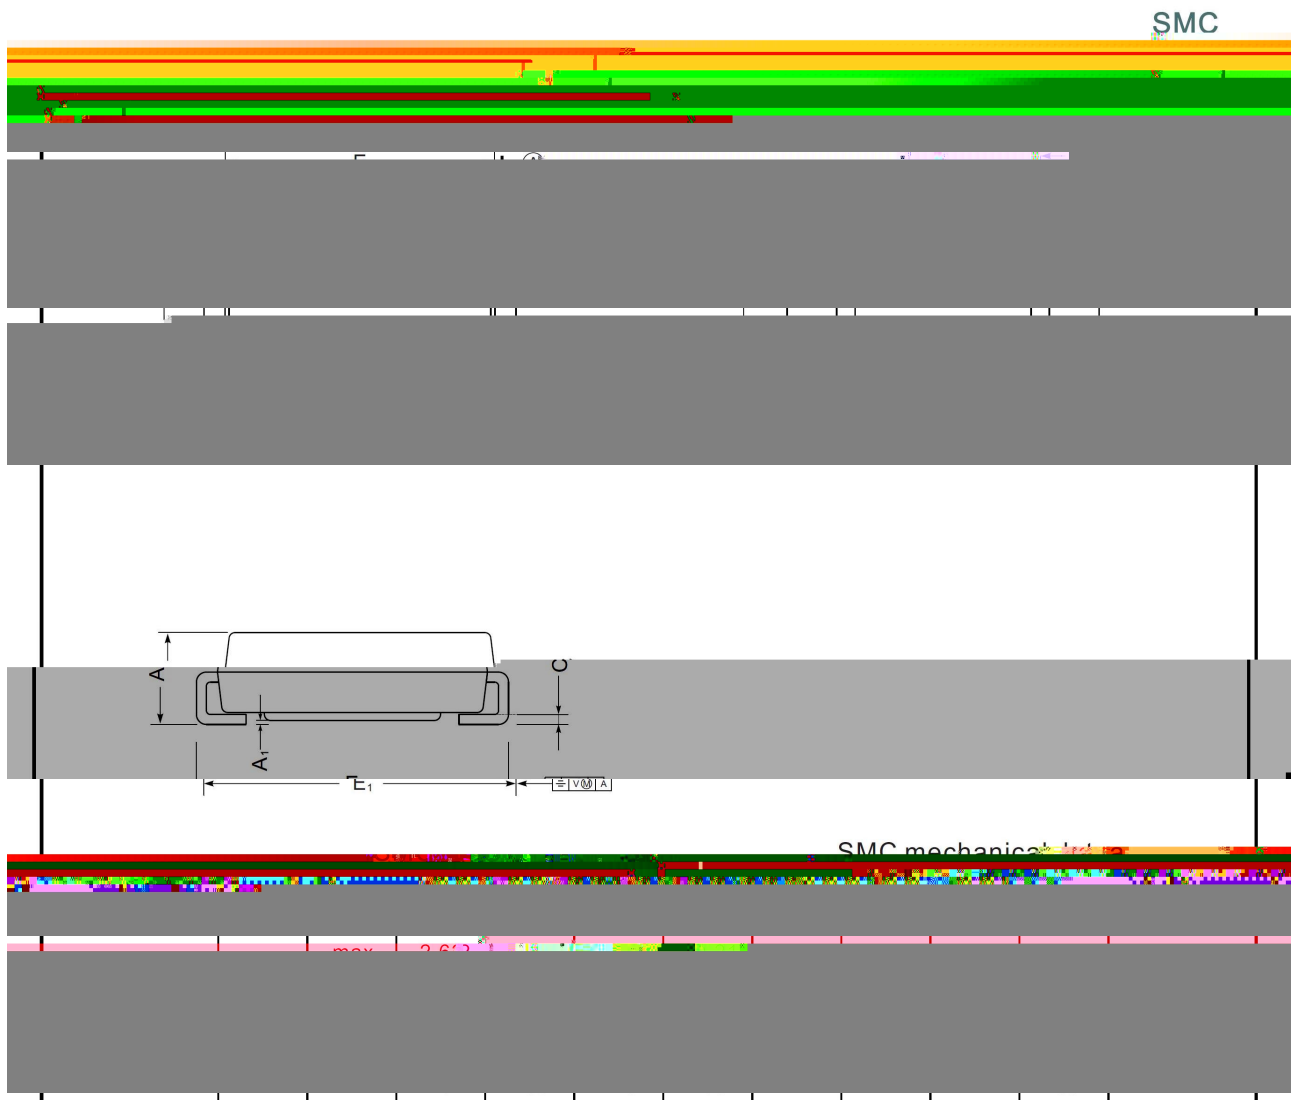

Rev.B Feb.-2021

DATA SHEET



" # D E / Marking Instructions



RS5A


1 F

3 F


Note:

RS5A Product Type Code

**** Lot No. Code The 1st F means:YM Code The last 3 F means:little Lot No Code



H I J K L = > ? (M N) / O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

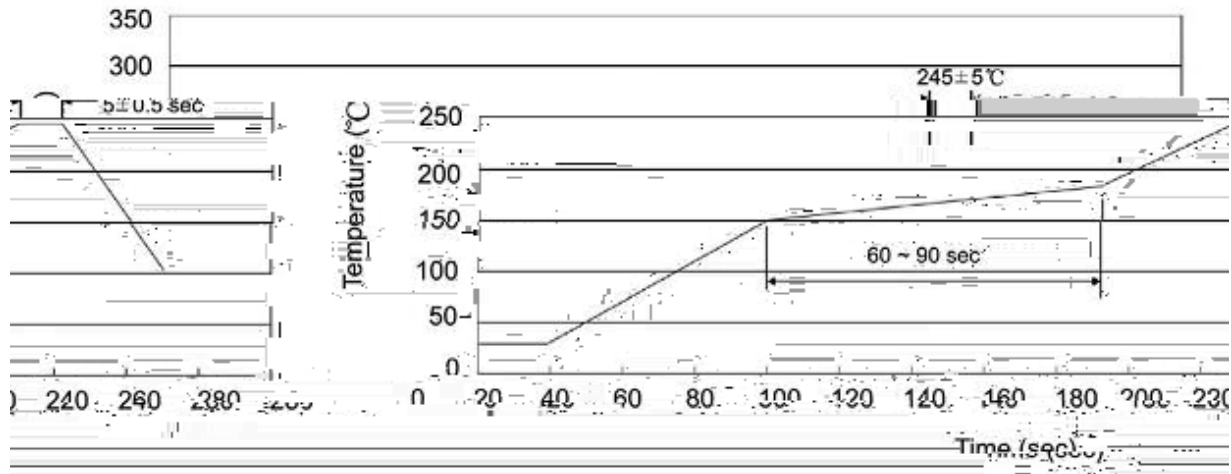

Note:

1. Preheating: 150~180 °C, Time: 60~90 sec.
2. Peak Temp.: 245 ± 5 °C, Duration: 5 ~ 0.5 sec.
3. Cooling Speed: 2~10 °C/sec.

h J i j k l m n / Resistance to Soldering Heat Test Conditions

260 ± 5 °C, 10 ± 1 sec. Temp.: 260 ± 5 °C, Time: 10 ± 1 sec

o p q r / Packaging SPEC.

/ REEL

Package Type	Units " # \$					Dimension " % & (unit ' mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box (	Outer Box)
SMC	3000	2	6000	6	36000	13" × 16	337X337X49	380X335X366

s * D E / Notices