


SOT-323 PNP Silicon PNP transistor in a SOT-323 Plastic Package.

S8050W
Complementary pair with S8050W.

Power amplifier applications.

等效电路 / Equivalent Circuit




PIN1 Emitter PIN 2 Base PIN 3 Collector

封装 / MT4 170.5 57.944 1bg.9 55D2.8(2)h4.4(e)2g

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

电 压 电 流 特 性 曲 线 / Electrical Characteristic Curve

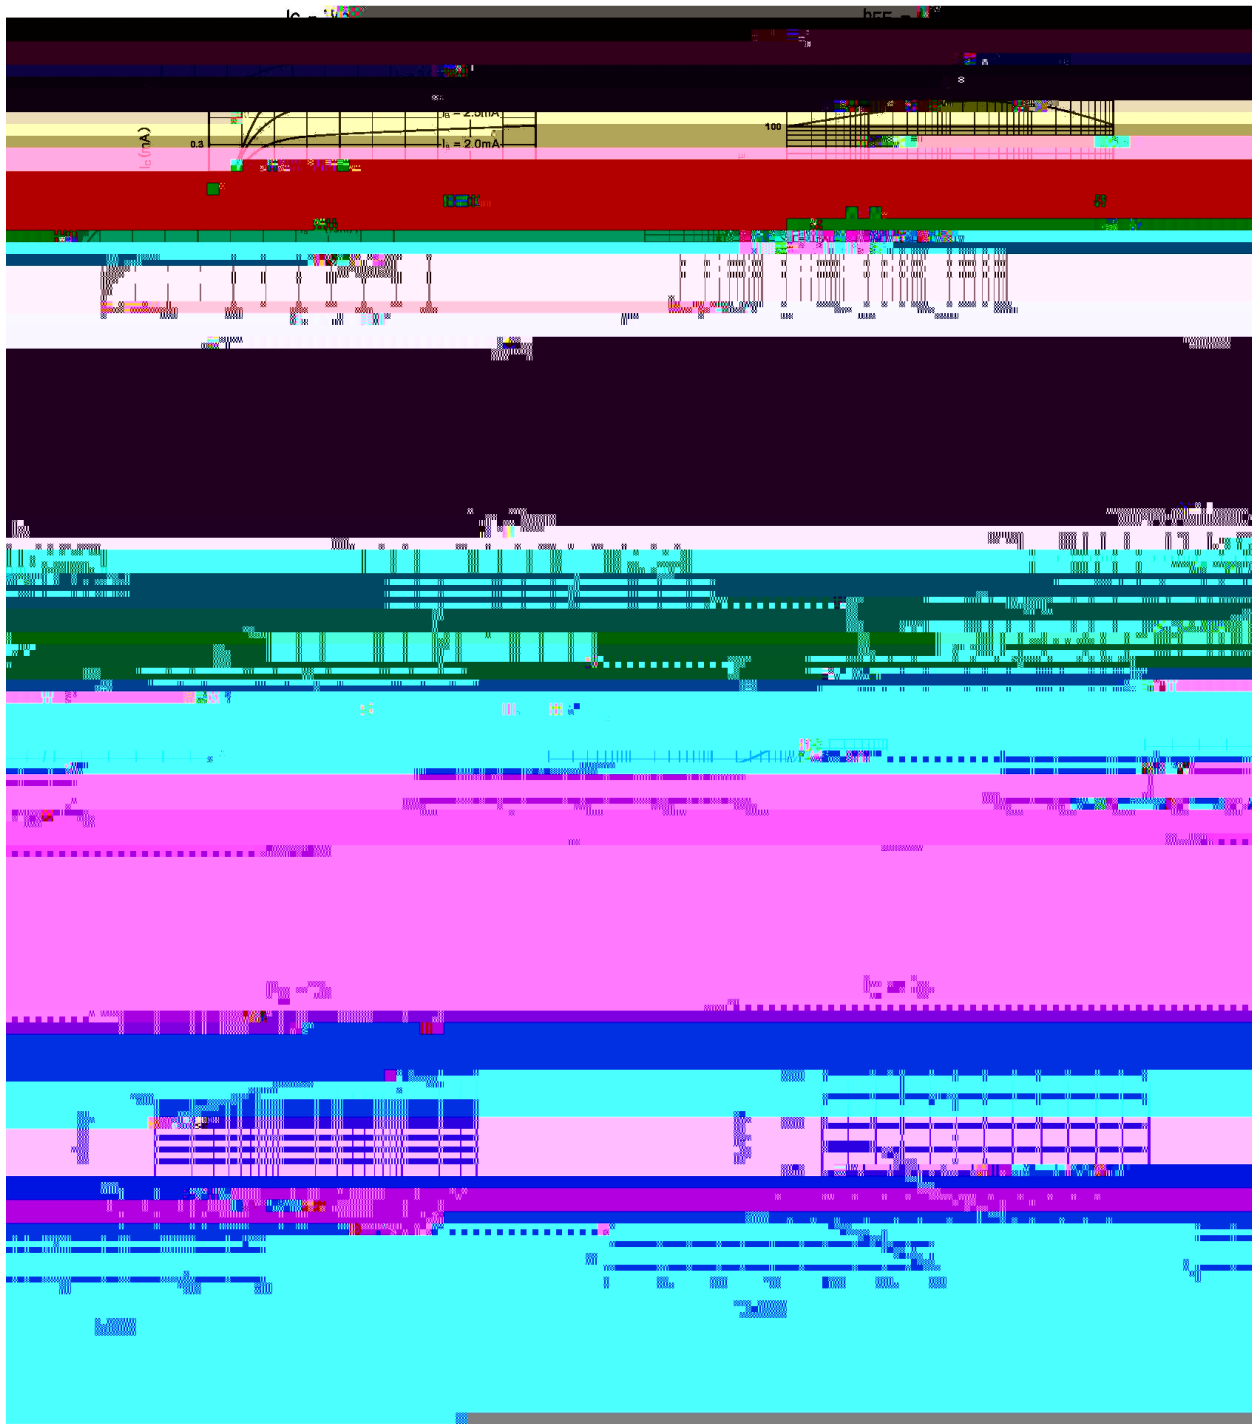


⊂ É Ò Ì f / Package Dimensions

SOT-323

单位: mm



1. 1.1 / Marking Instructions

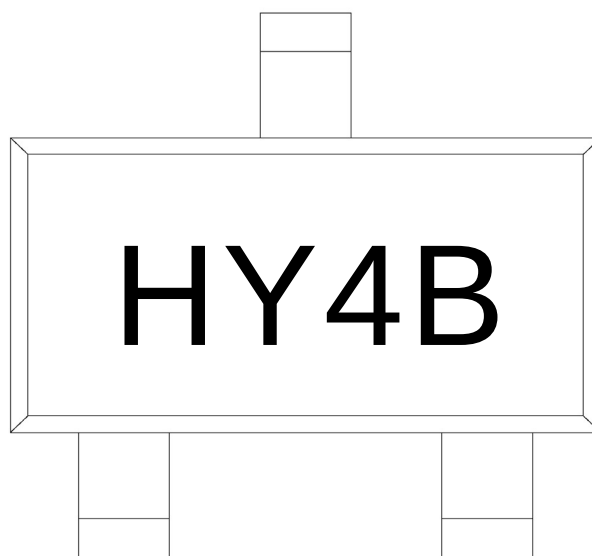

H

Y4

B h_{FE}


Note:

H: Company Code.

Y4: Product Type.

B h_{FE} Classifications Symbol

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulq j+Se0l uhh,

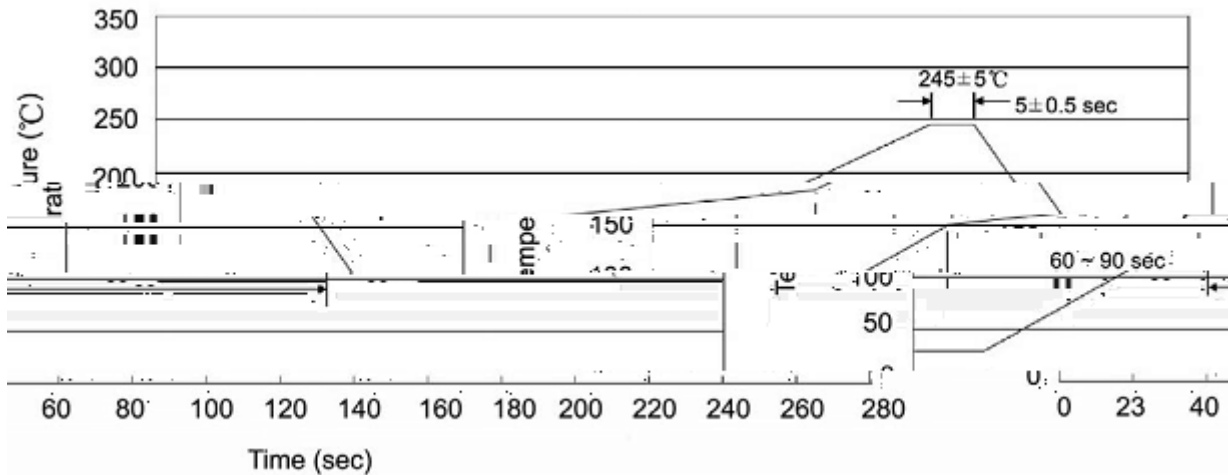

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

Notices /