


TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.






P_C I_C , h_{FE} , S9013
 High P_C and I_C , excellent h_{FE} linearity, complementary pair with S9013.

Amplifier of portable radios in class B push-pull operation.




PIN1 Collector PIN 2 Base PIN 3 Emitter


h_{FE} Classifications Symbol	D	E	F	G	H	I
h_{FE} Range	64~91	78~112	96~135	112~166	144~202	188~276

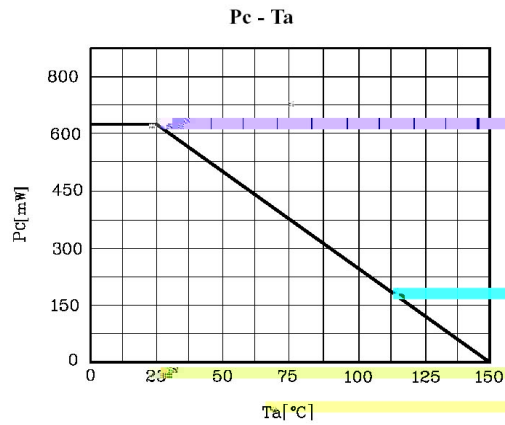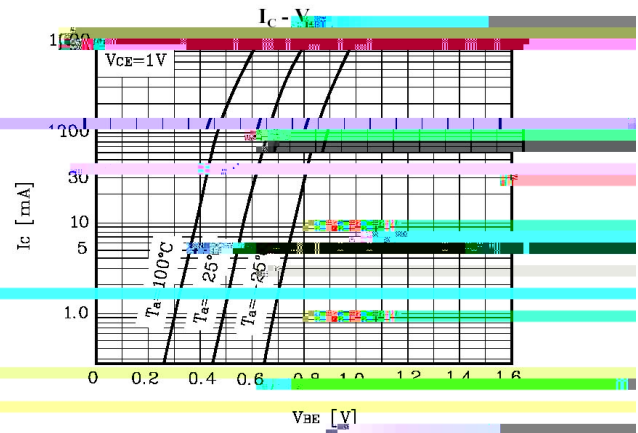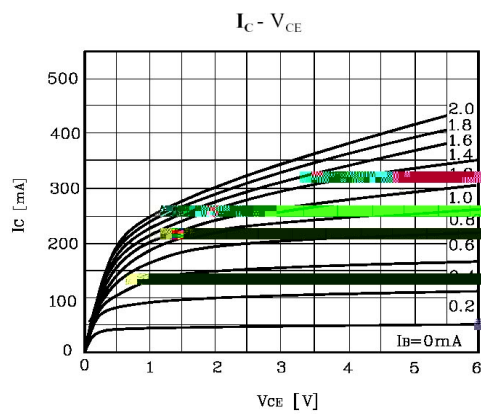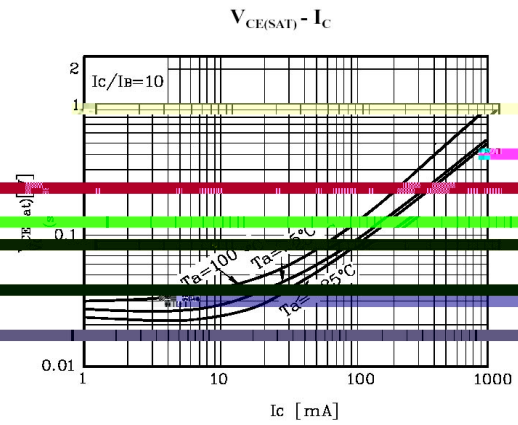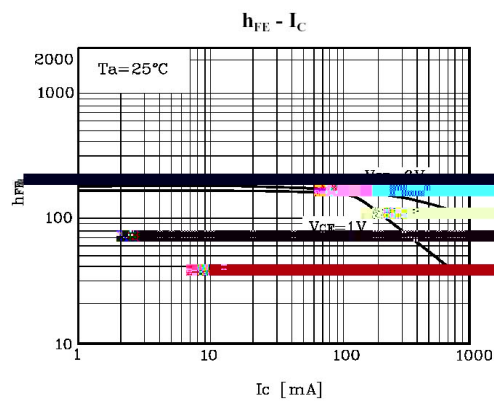

T0-92

Unit: mm

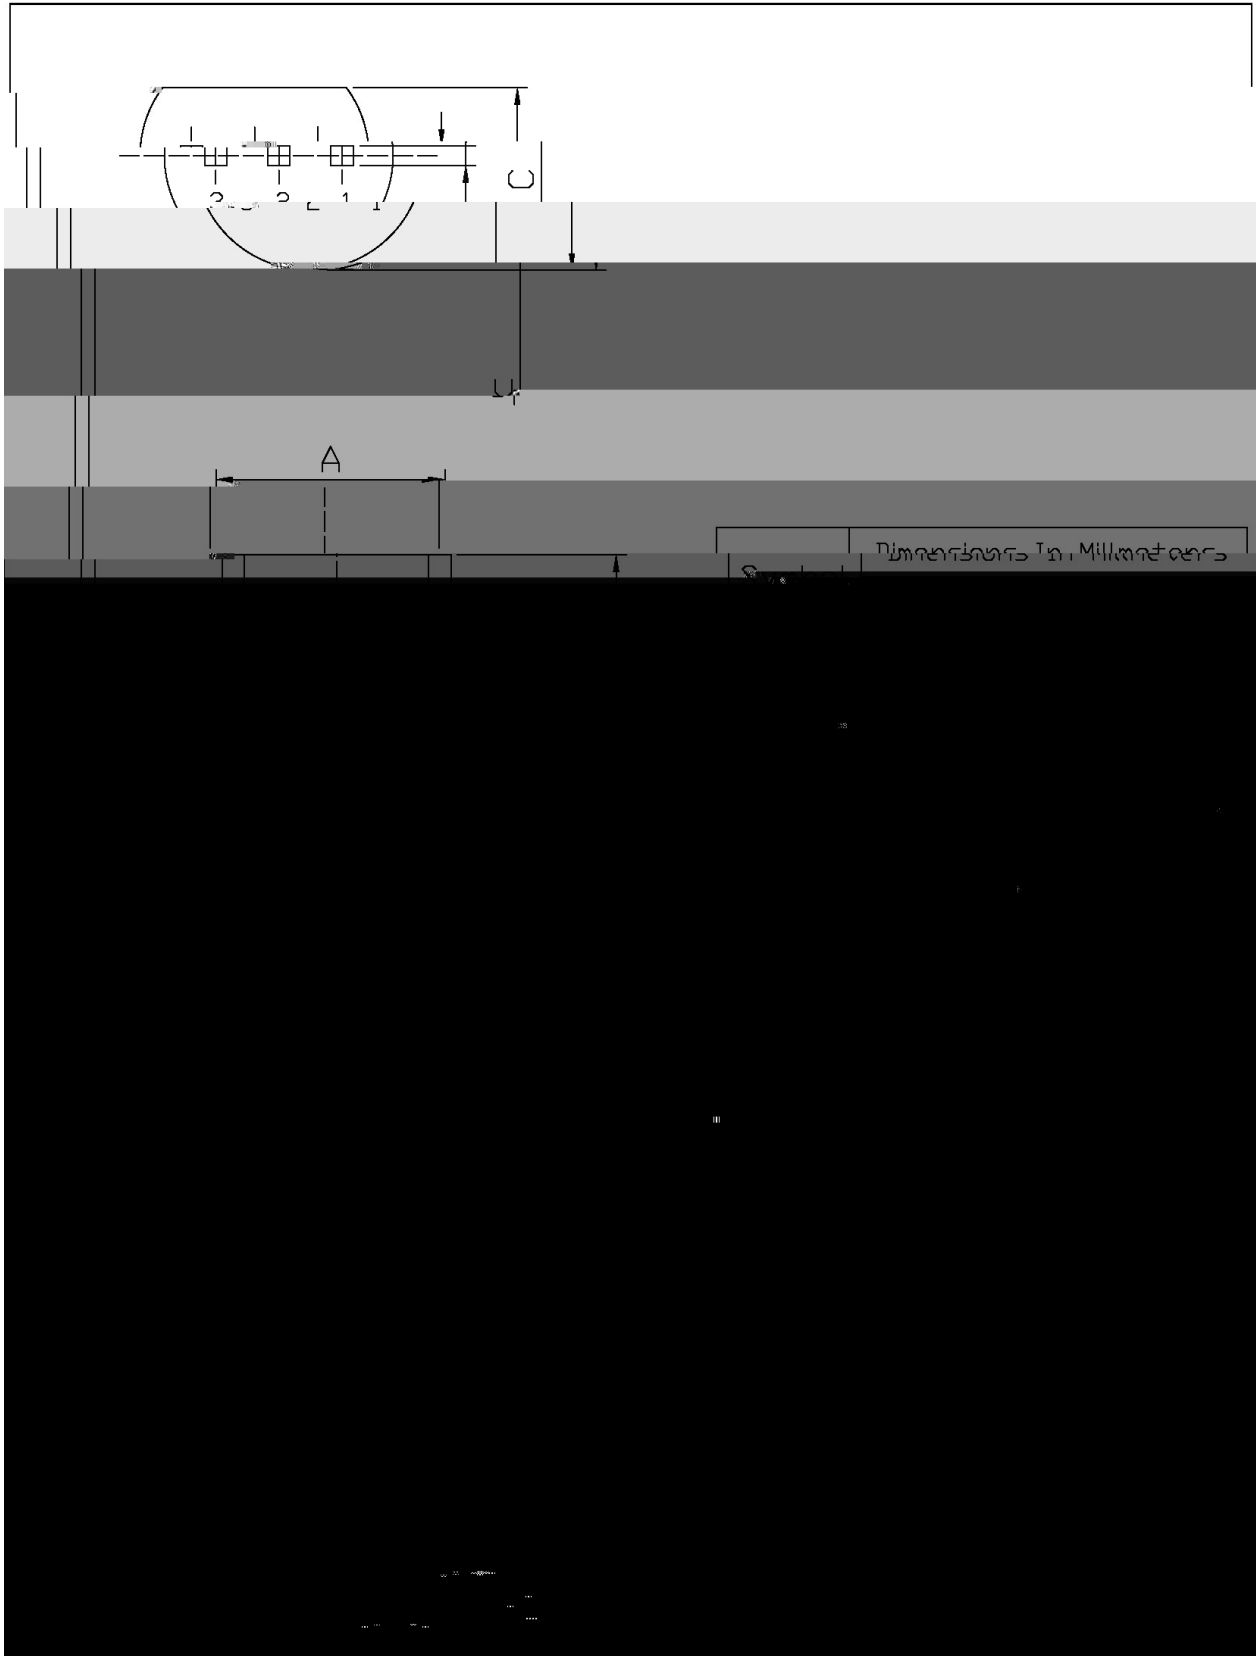

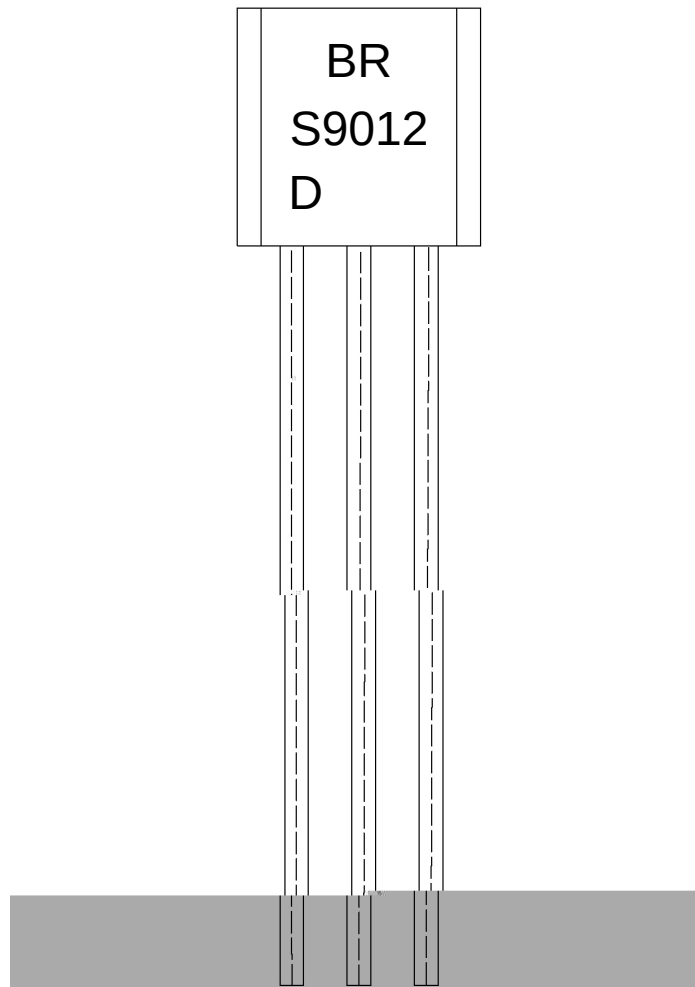

BR

S9012

D: h_{FE}


Note:

BR: Company Code.

S9012: Product Type.

D: h_{FE} Classifications Symbol.

****: Lot No. Code, code change with Lot No.

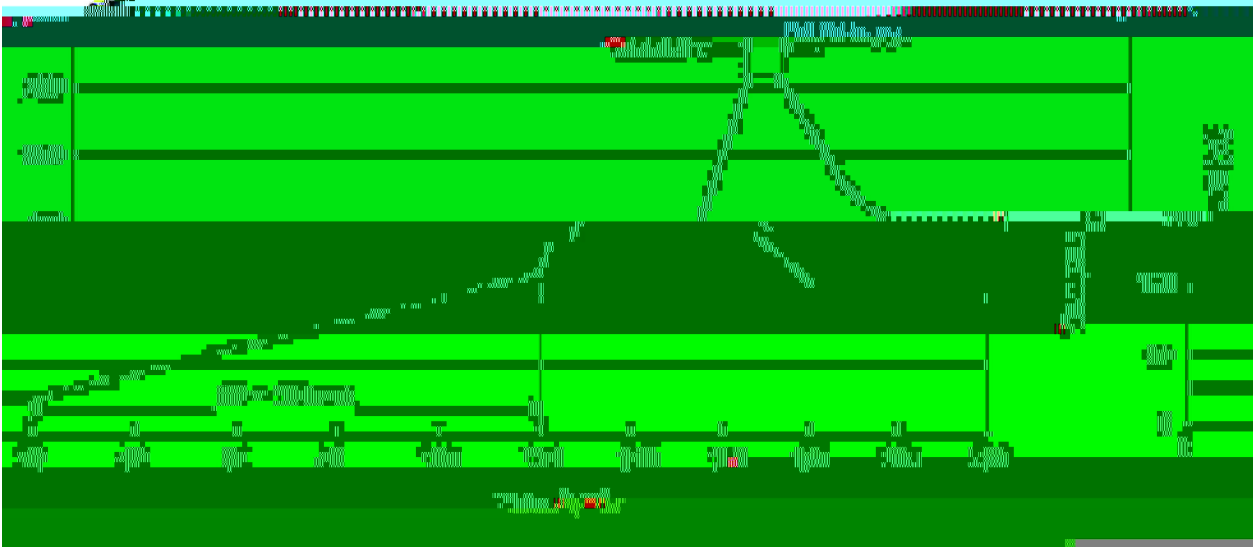

- 1

25 150

60 90sec;

2

255±5

5±0.5sec;

3

2 10

/sec.
- Note:
1.Preheating:25~150 , Time:60~90sec.
2.Peak Temp.:255±5 , Duration:5±0.5sec.
3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type	Units	Dimension	(unit mm3)
--------------	-------	-----------	------------