

/ Descriptions

20~200V 2.0A


/ Features

/ Applications


/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

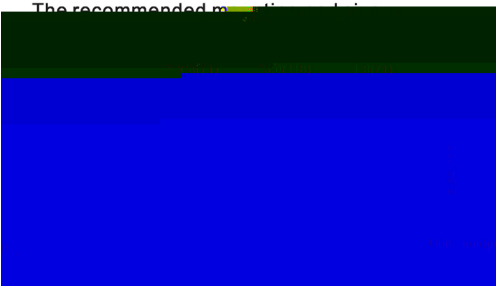


/ Marking

SS22BF~SS220BF

SS22BF~SS220BF

Marking	
Marking code	Type number
SS22B	SS22BF
SS24B	SS24BF
SS26B	SS26BF
SS28B	SS28BF
SS30B	SS30BF
SS32B	SS32BF
SS34B	SS34BF
SS36B	SS36BF
SS38B	SS38BF
SS40B	SS40BF
SS42B	SS42BF
SS44B	SS44BF
SS46B	SS46BF
SS48B	SS48BF
SS50B	SS50BF
SS52B	SS52BF
SS54B	SS54BF
SS56B	SS56BF
SS58B	SS58BF
SS60B	SS60BF
SS62B	SS62BF
SS64B	SS64BF
SS66B	SS66BF
SS68B	SS68BF
SS70B	SS70BF
SS72B	SS72BF
SS74B	SS74BF
SS76B	SS76BF
SS78B	SS78BF
SS80B	SS80BF
SS82B	SS82BF
SS84B	SS84BF
SS86B	SS86BF
SS88B	SS88BF
SS90B	SS90BF
SS92B	SS92BF
SS94B	SS94BF
SS96B	SS96BF
SS98B	SS98BF
SS100B	SS100BF

/ Marking Instructions

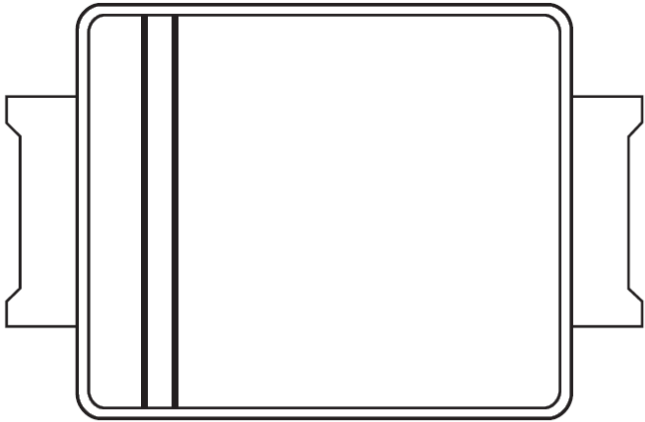

S22B	Mark	2t5	0 Tw	**	M	M	Q	-15	↓	↶
------	------	-----	------	----	---	---	---	-----	---	---

SS22BF~SS220BF



DATA SHEET

() / **Temperature Profile for IR Reflow Soldering(Pb-Free)**