



40~60V

2.0A



PIN	DESCRIPTION
1	Cathode
2	Anode

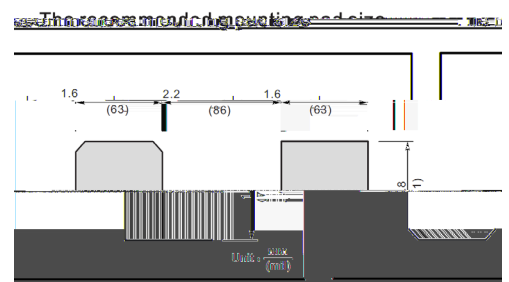


.

Fig.1 Forward Current Derating Curve




Fig.2 Typical Reverse Characteristics



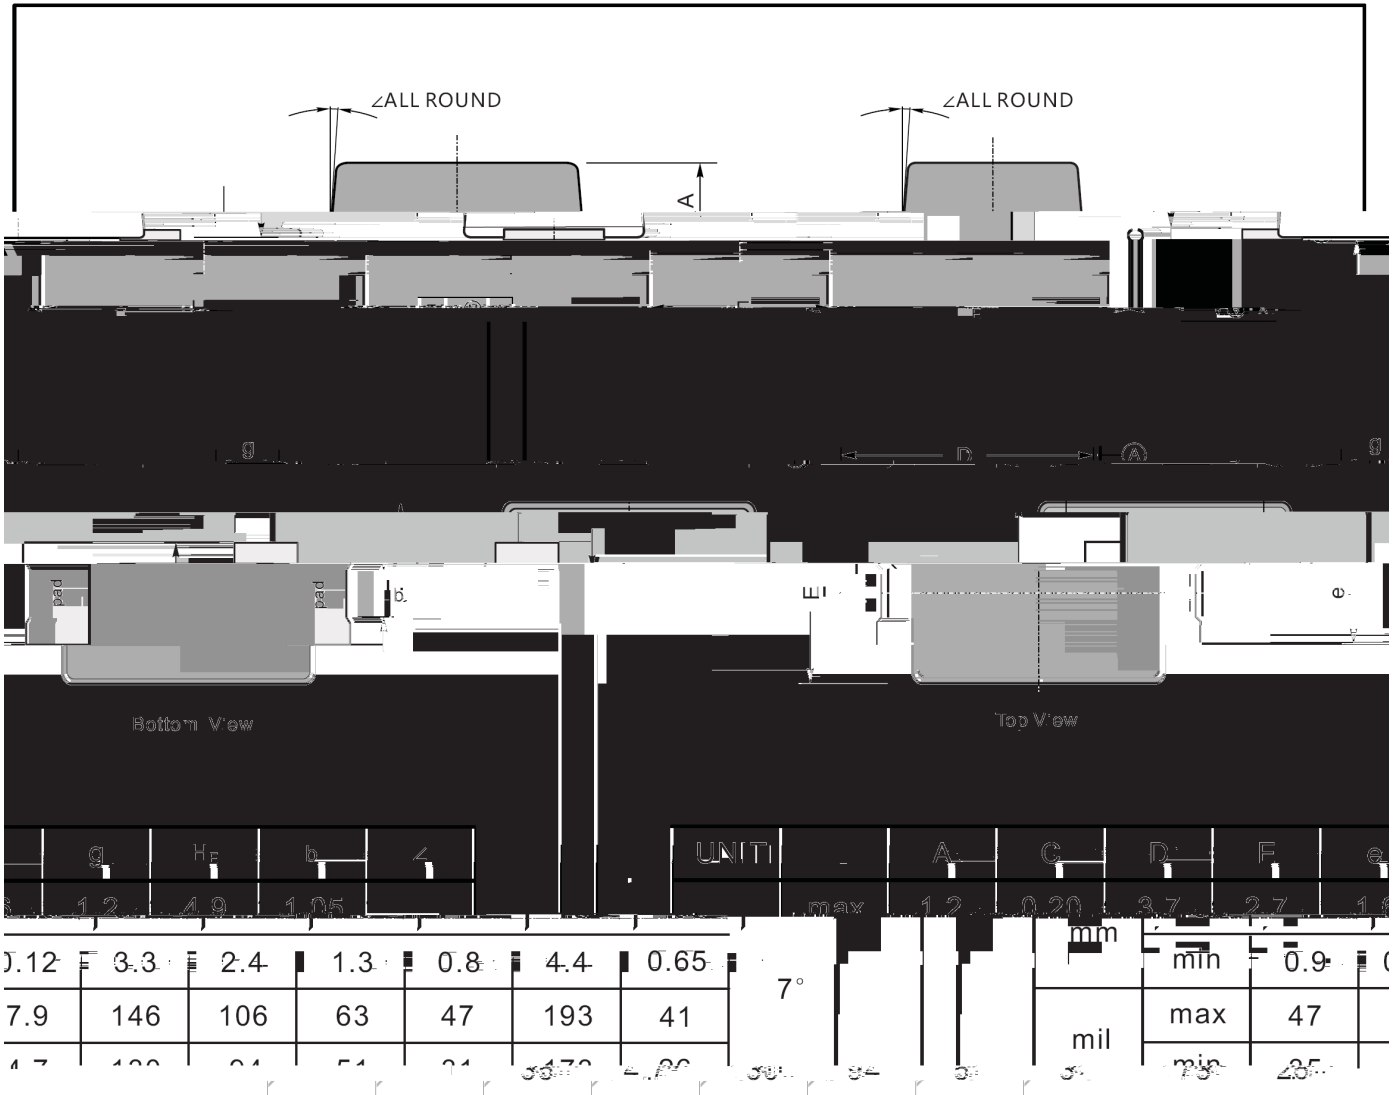

Marking

Type number		Marking code	
SSL24F		SSL24	
SSL25F		SSL25	
SSL26F		SSL26	

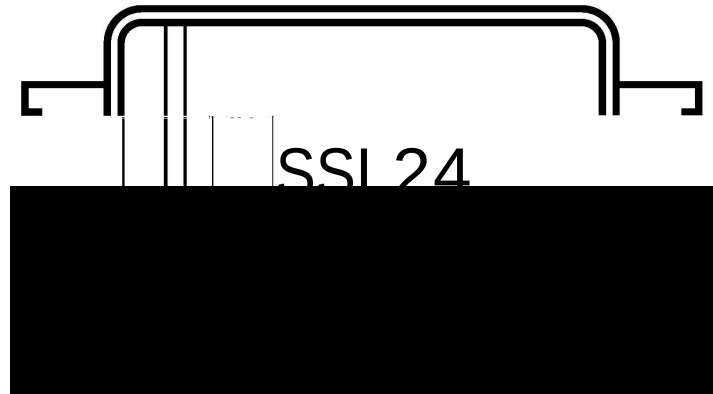

SSL24

1 *


3 *

SSL24

*

*

Temperature Profile for IR Reflow Soldering(Pb-Free)

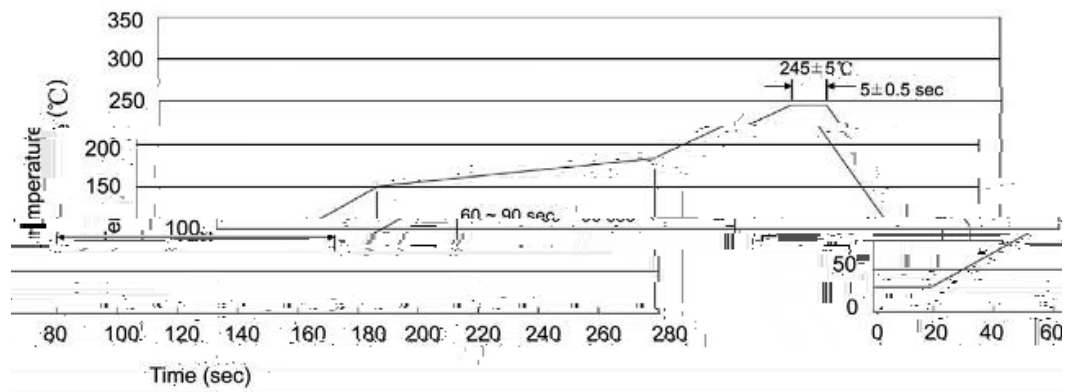

± ± ± ±

± ± ± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box