

Rev. A Nov.-2019



Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 60V, Forward Current: 2.0A ,SMB package.

Low power loss, High efficiency, High forward surge current capability, For surface mounted applications. HF product.



General purpose.



Rev. A Nov.-2019




0 8 9 = > ?

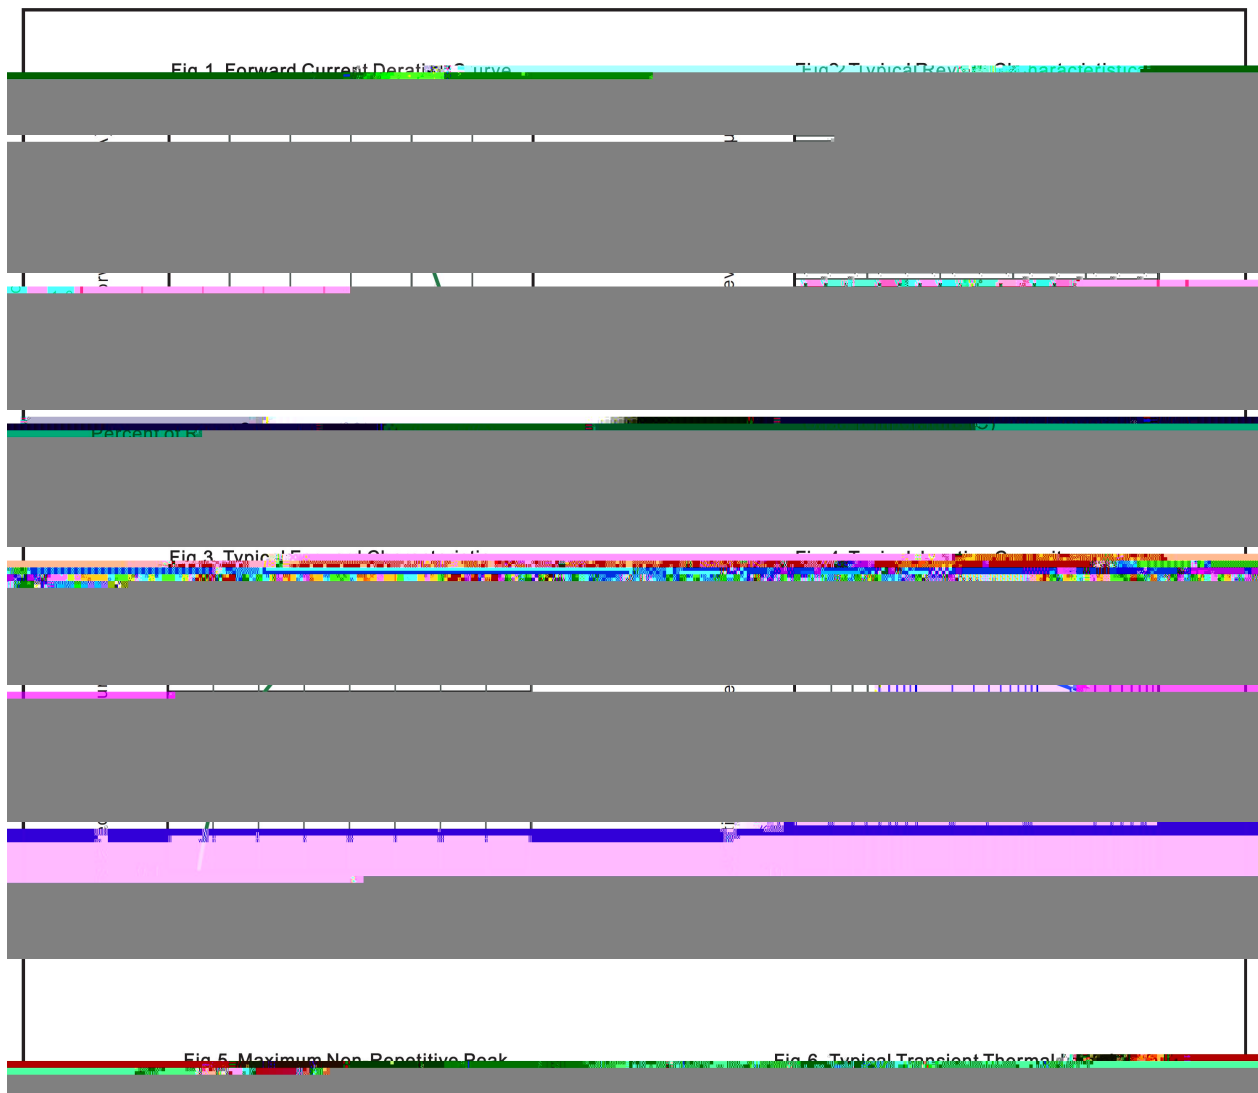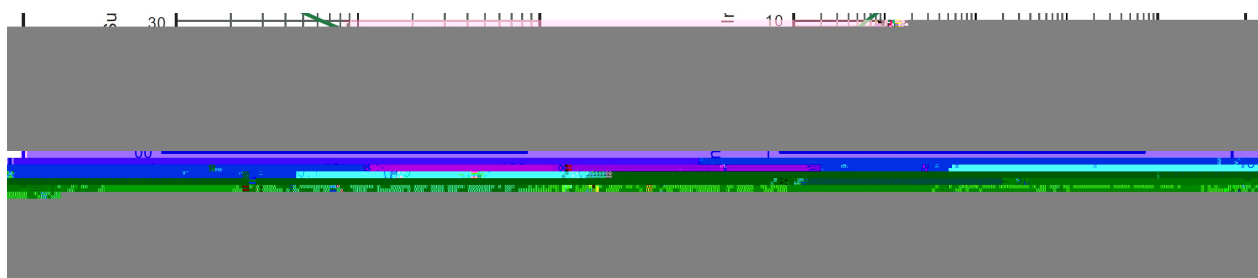


@ A B C ?

SMB

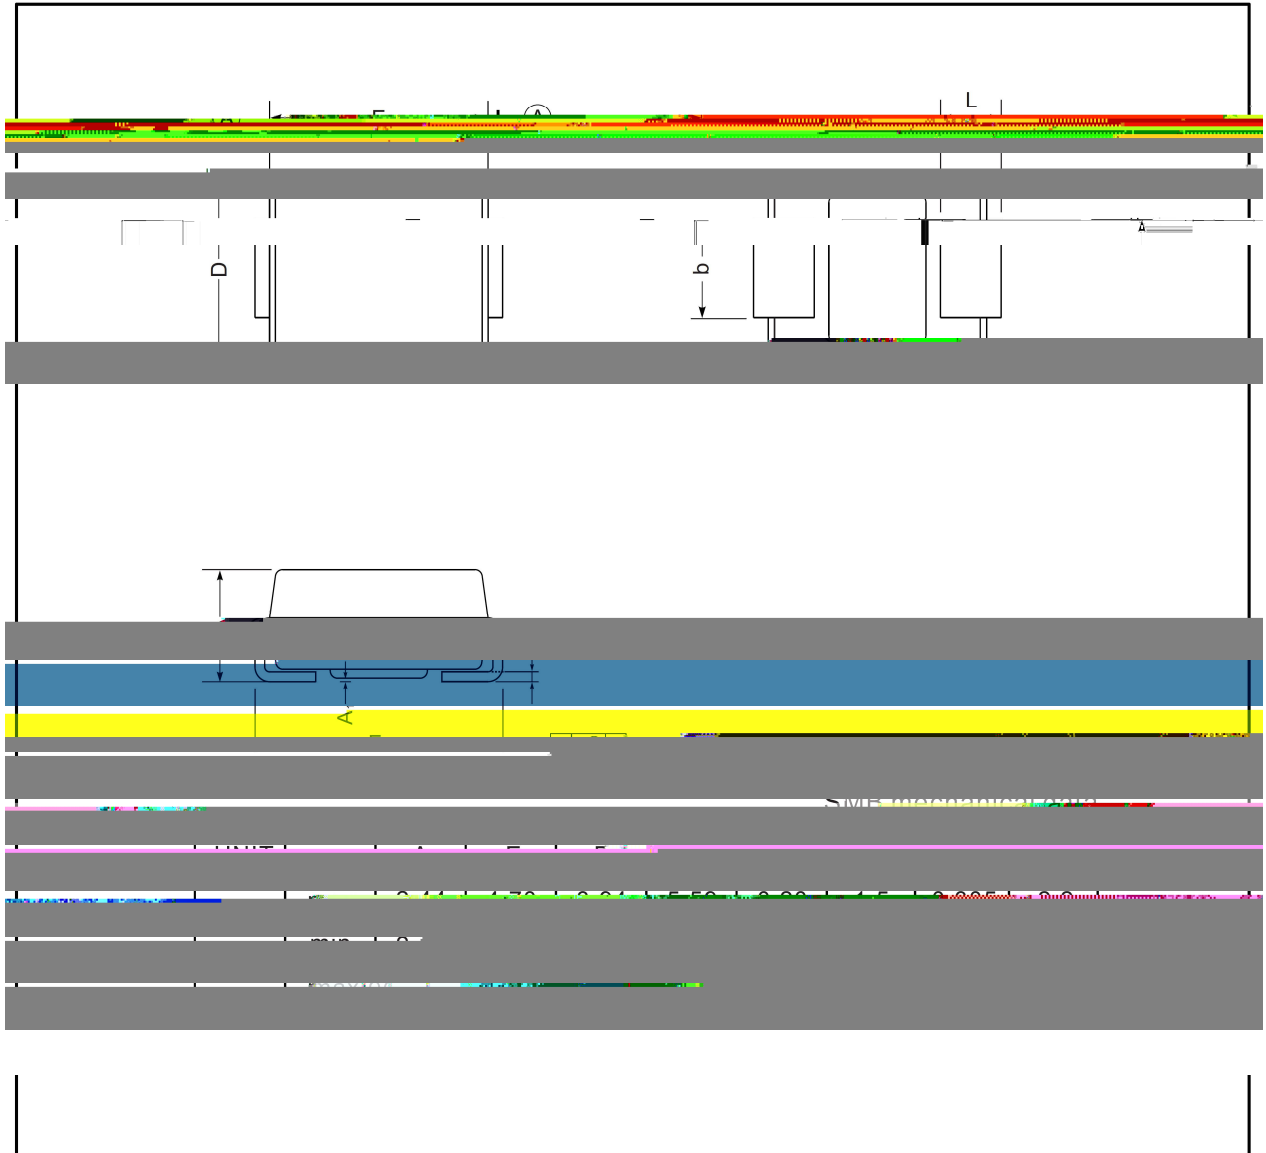



" # D E

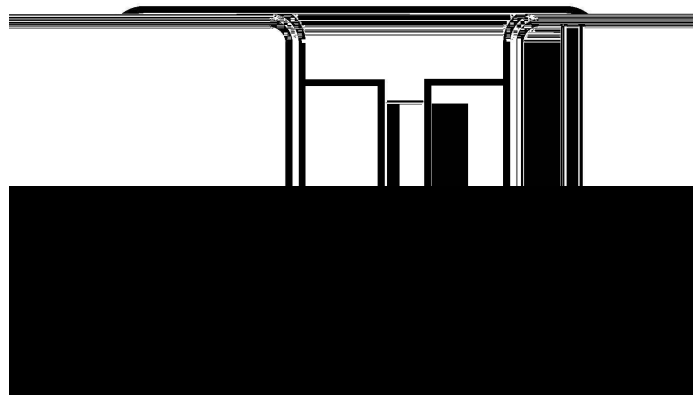


SSL26

1 F



H I J K L = > ? M N O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

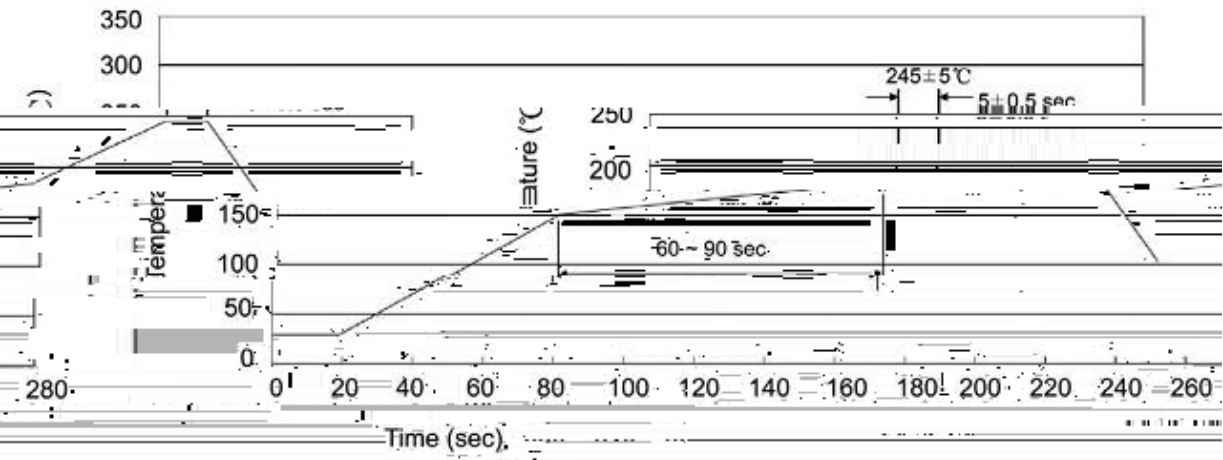

Note:

- | | | | |
|---|---------|-----------|---|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

h J i j k l m n

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

o p q r

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	ñts//Re 只t卷盘e	s//Rtl / é rBe 卷盘t盒e	ñtl / é rBe 只t盒e	l / é rB/ito xñ é rBe 盒t箱e	ñto xñ é rBe 只t箱e	s//Re	l / é rB 盒e	o xñ é rB 箱e
SMB	3000	5	15000	5	75000	7" ×11	185X180X105	390X385X205

s * D E