


A	2020-6-3	ALL	SMA-S-SSL34-3A40V		



& ' " (" " #* -0/,9:,17 -"

40V 3.0A SMA

Surface Mount Schottky Barrier Rectifier, Reverse Voltage: 40V, Forward Current: 3.0A ,SMA thin package.

() " " (" " ; *5:</* -"


Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications,For surface mounted applications.Halogen free product.

"


* + " " (" " \$99=,05:,17 -" "

General purpose.

, - . / 0 1 " " (" " ' ><, +5-*7:"?,/0<,:"




2 3 4 5 " " (" " @,77,78"

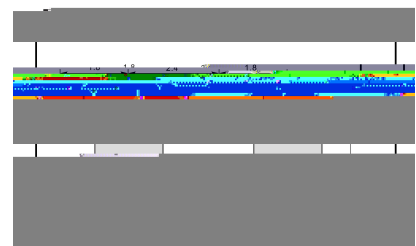

" # \$ % " " (" " 45/6,78

See Marking Instructions.



"


参数
Parameter


符号
Symbol

数值
Rating




" # D E " " (" 45/6,78"J7-:/<0:,17 - "

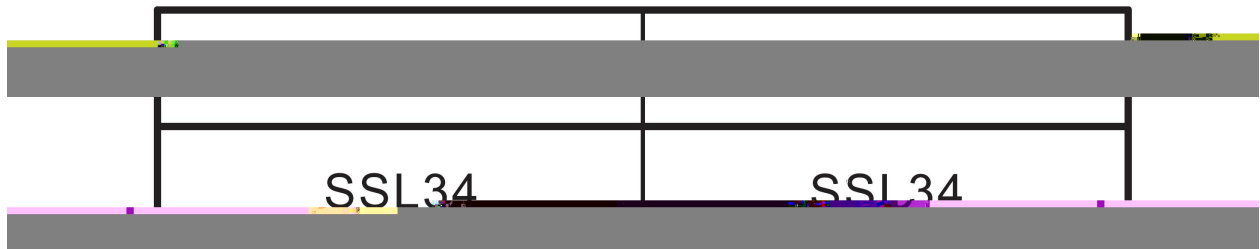



" # D E " " (" 45/6,78"J7 - : / < 0 : , 17 - "

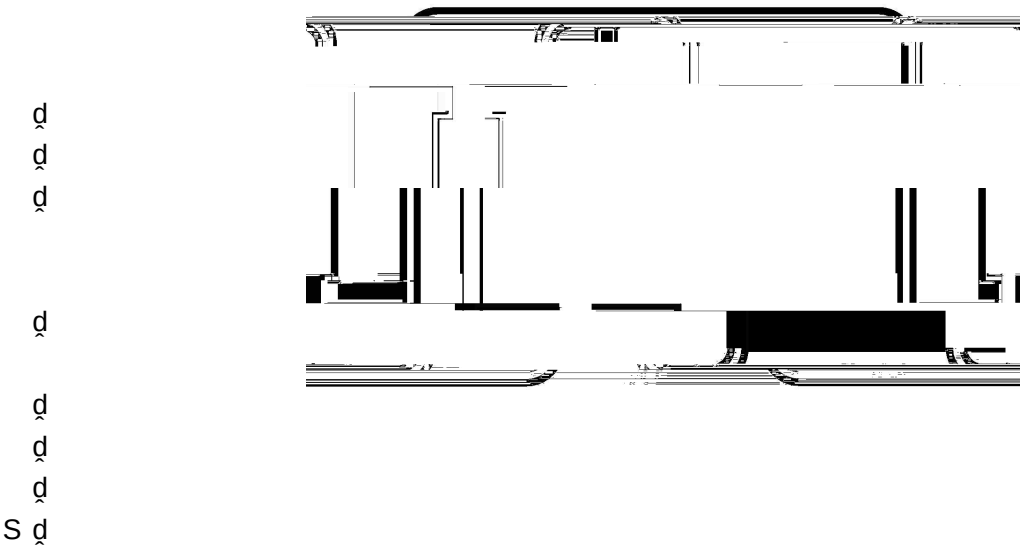

SSL34
LLLL"

1 F

3 F

Note:

SSL34 Product Type Code

LLLL Lot No. Code The 1st F means:YM Code The last 3 F means:little Lot No

!"