

SSL54C~SSL510C

Rev.B Feb.-2021



DATA SHEET

	2018-5				

B 2021-2-18 7

SSL54C~SSL510C

Rev.B Feb.-2021



DATA SHEET

40~100V

5.0

SMC

Surface Mount Schottky Barrier Rectifier, Reverse Voltage: 40 to 60 V, Forward Current:5.0A ,SMC

SSL54C~SSL510C

Rev.B Feb.-2021

0 8 9 = > ? / Electrical Characteristic Curve



SSL54C~SSL510C

Rev.B Feb.-2021

DATA SHEET

SSL54C~SSL510C


Rev.B Feb.-2021



DATA SHEET



H I J K L = > ? (M N) / O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

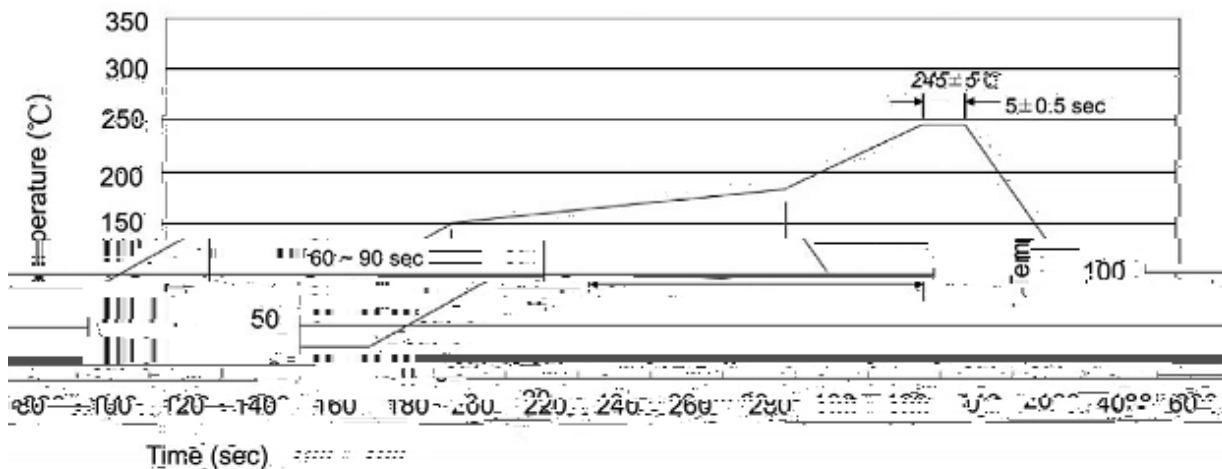

Note:

- | | | | |
|---|-------------|-----------|--|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

h J i j k l m n / Resistance to Soldering Heat Test Conditions

260±5°C

10±1 sec.

Temp.:260±5°C

Time:10±1 sec

o p q r / Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱