

5 é / Descriptions

: 5 .> // x 4 6 4 ! - } â 'ož Silicon NPN transistor in a TO-126 Plastic Package.


□ a / Features

: / 6 2 ; mož
Complement to TIP127L.

Đ ÷ / Applications

9 ä ç Å • ¼ y Ýož
Medium power linear switching applications.

Ã W] Ô . / Equivalent Circuit



• Ů - æ / Pinning




PIN1 y Emitter PIN 2 y Collector PIN 3 y Base

Z Ü B , M V / h_{FE} Classifications & Marking

• - ~ ^a ¢ož See Marking Instructions.


Electrical Characteristic Curve

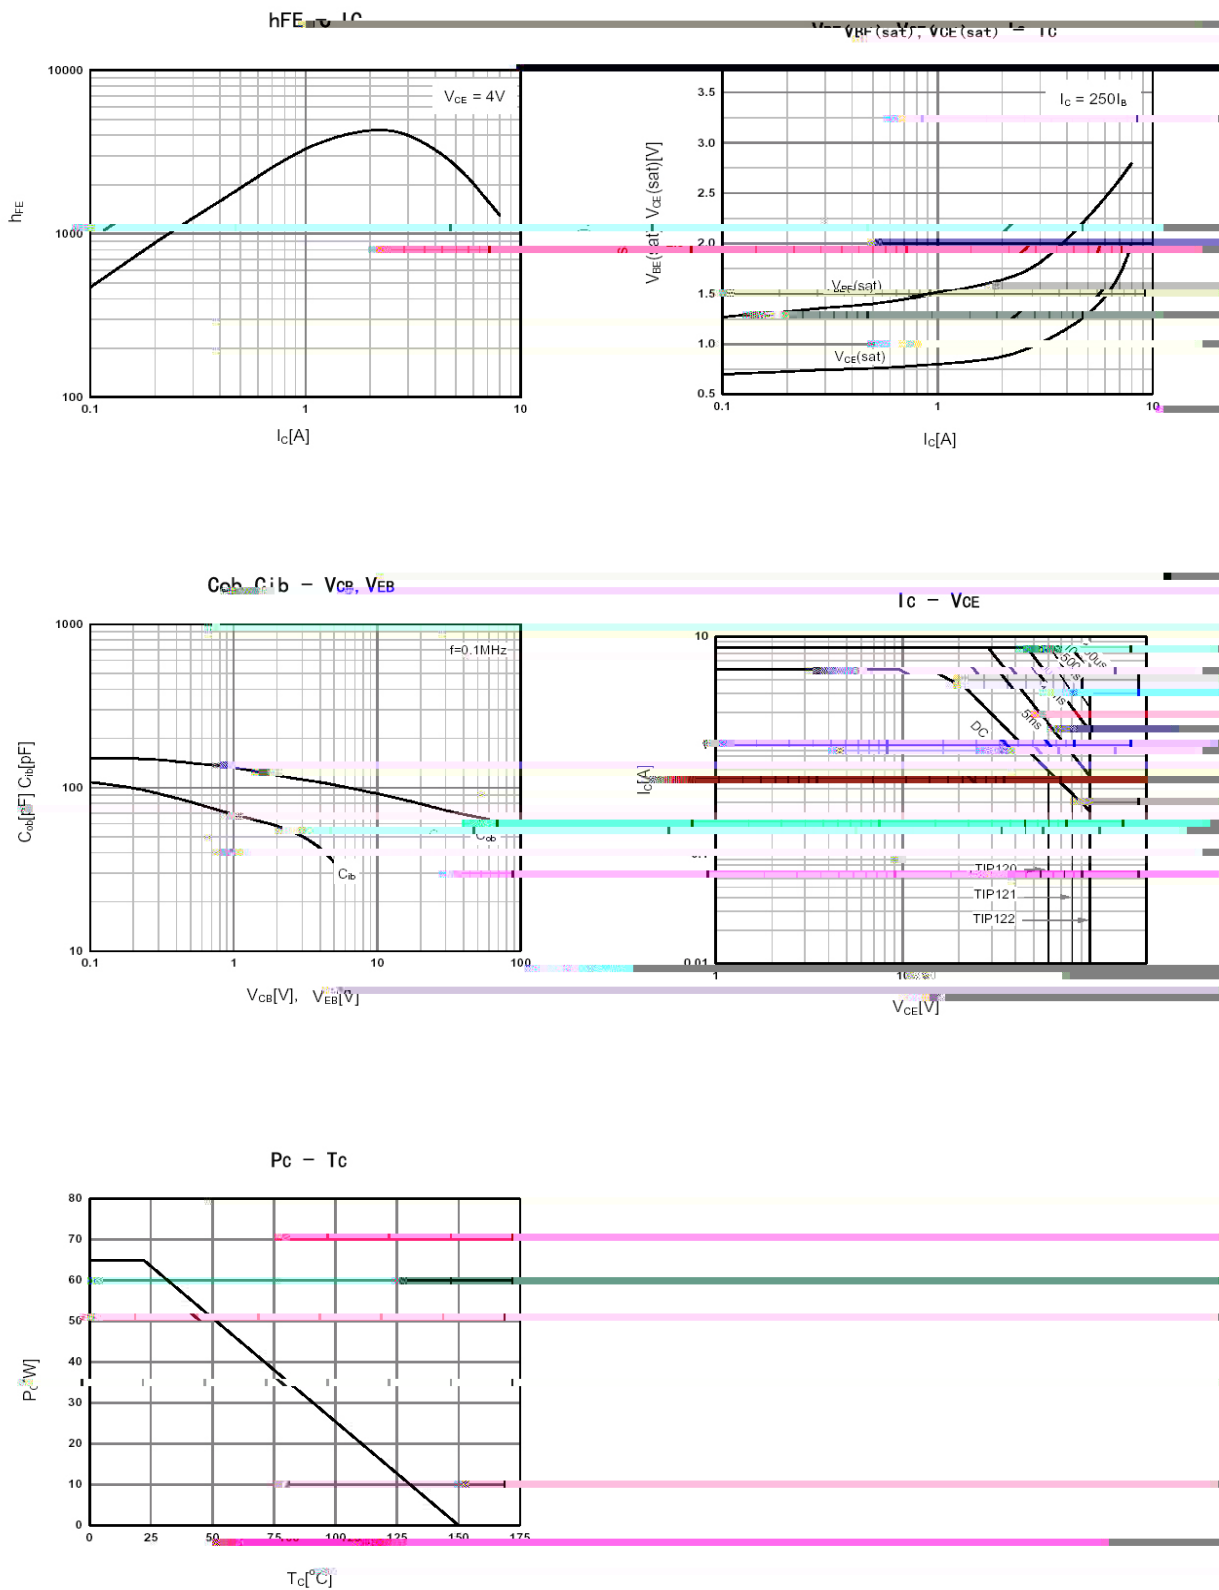


Ø □ =) ♂ / Package Dimensions

T□-126

单位: mm

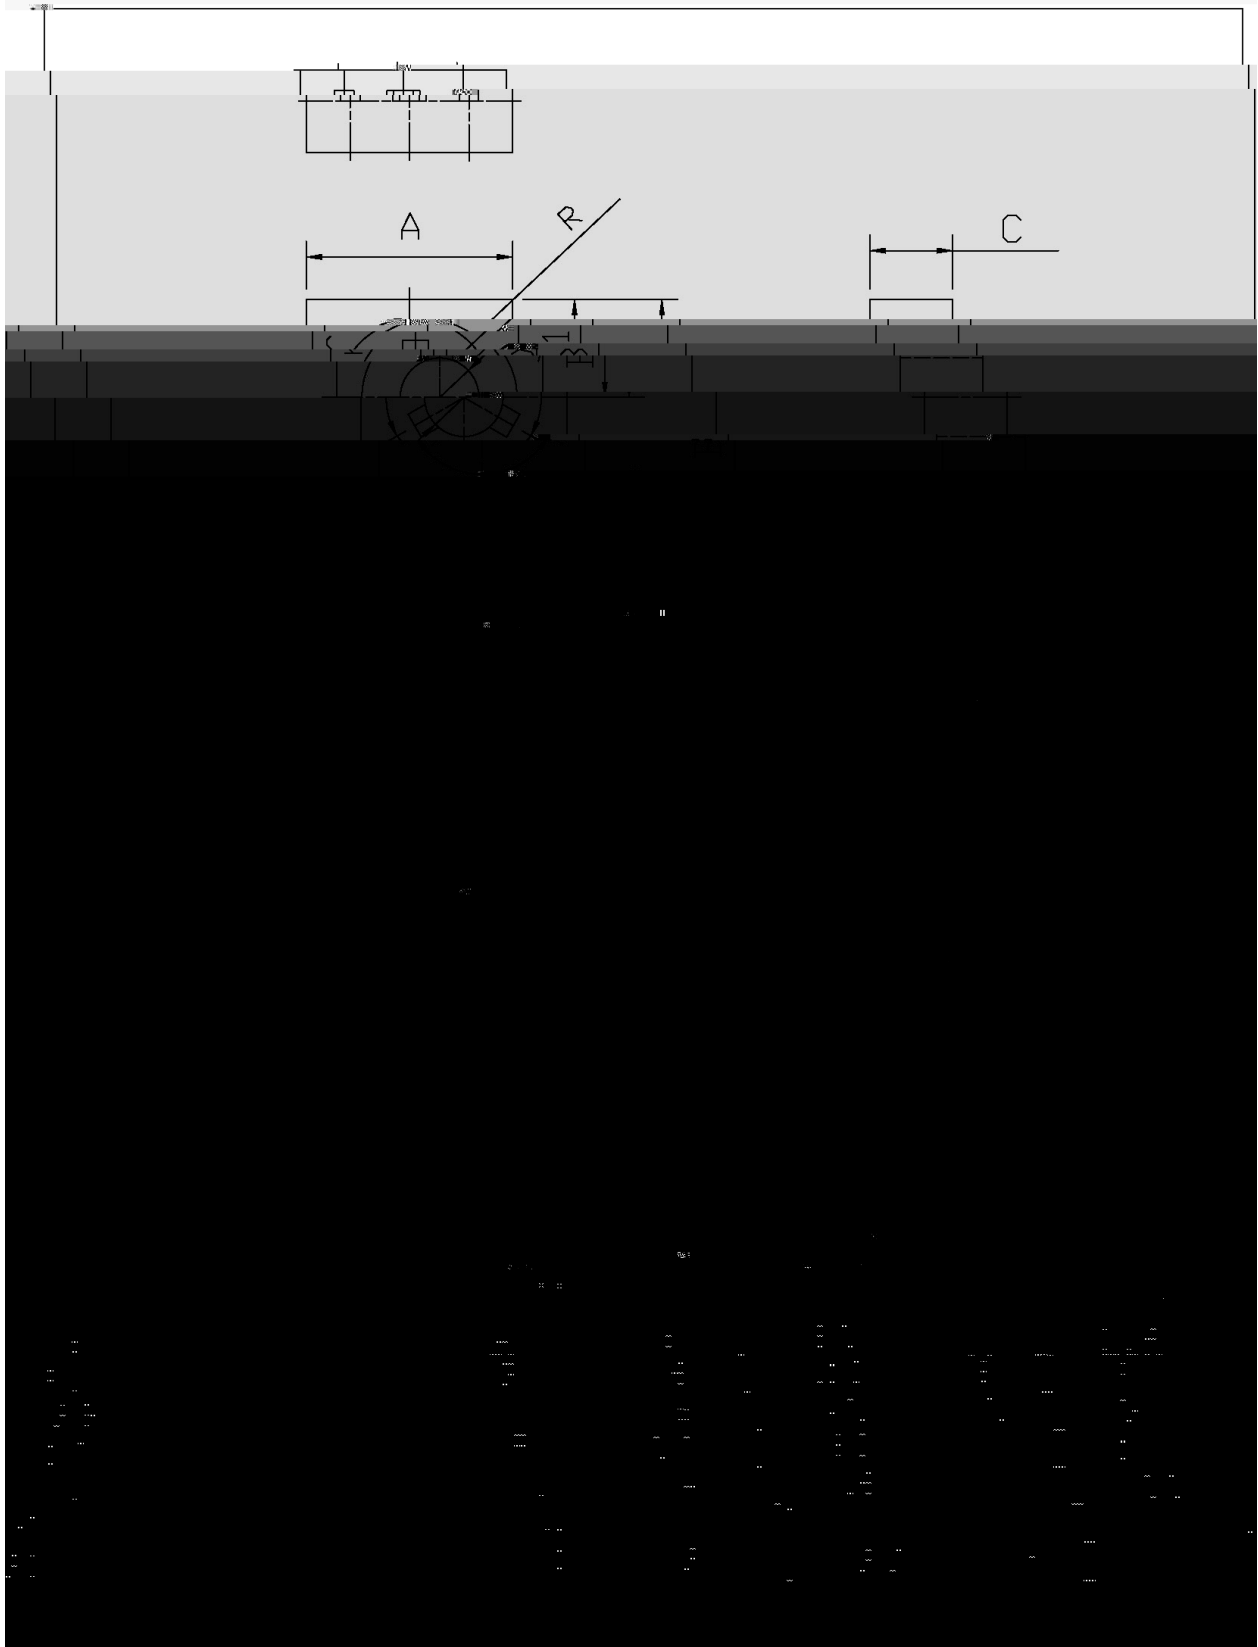


, M y f / Marking Instructions

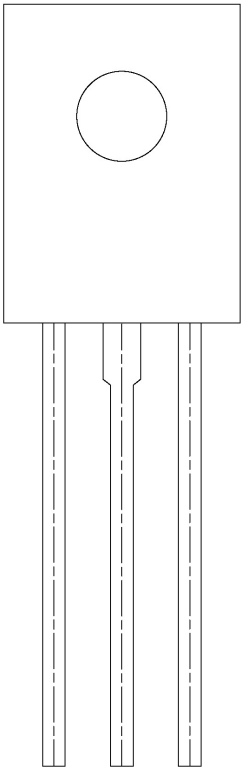

^a ϕ y
(8 y , [W A
: / 6 y D } °0 đ w0Â r ~ÿ•ApX , [Sk šÿ•ApX μEμ ož ` C

G PD t ... • Ž Ć (x /) / Temperature Profile for Dip Soldering(Pb-Free)

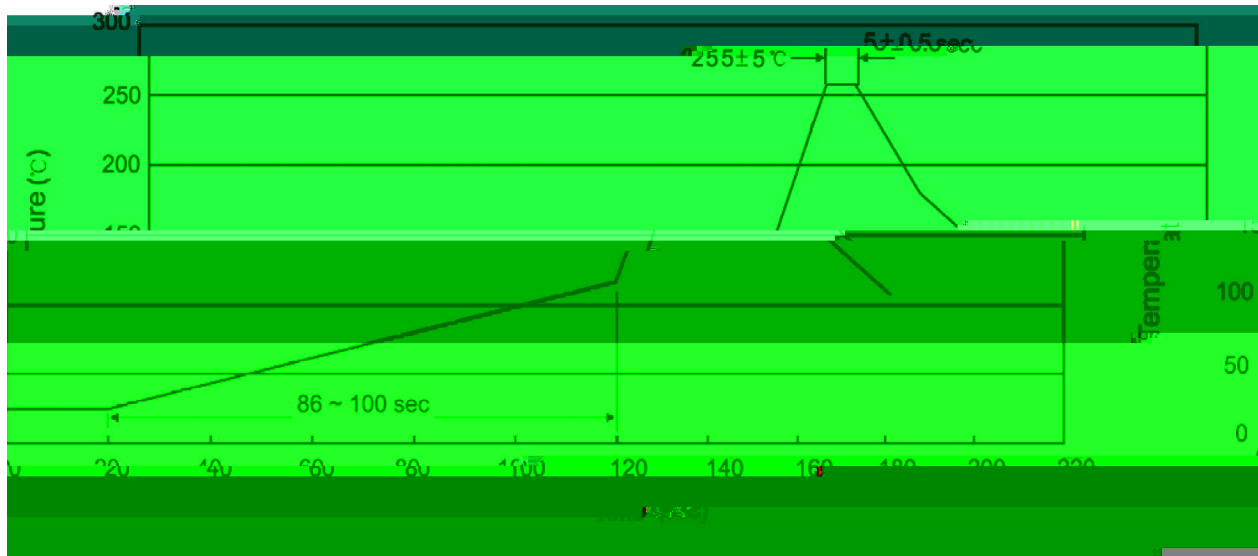

a Ć y

Note:

10• Ä ½ " † 25 ½150