ʌ ŏ Ὀ ᵾ˜ ǁ ˥ ı ɼ ᵇ ɔ я χ 83Y¢4333Y ı* ᵇ ɔ ╙ χ 513D ı VPD Ṃ Ŀ

ᒣ אֻ ק ל ɑ ı ῳ̈ ' ح ı ŋ̇ ڤ ˧ ᵀ ꞗ ` UrKV ˝Yҧ 53442982HX ı گ ˜ ˚ Ŀ ŋ̇ ғ ᵝ
0

˘ ז ں1

1



2

PIN	DESCRIPTION
1	Cathode

node 2 A

The recommended mounting pad size

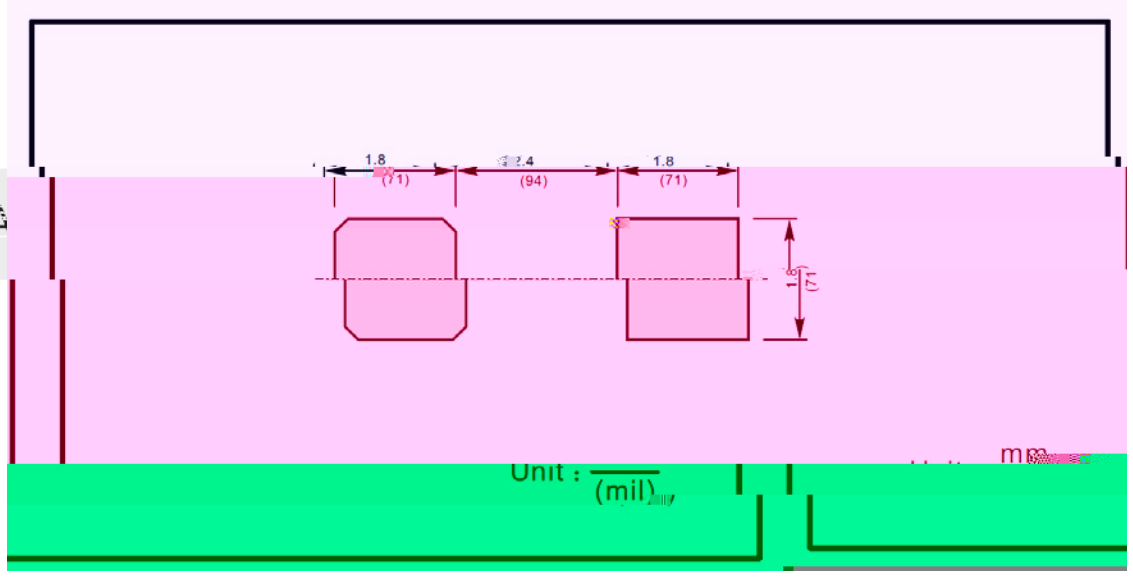

ŏ м ˥ ب ˝

[redacted]

[redacted]

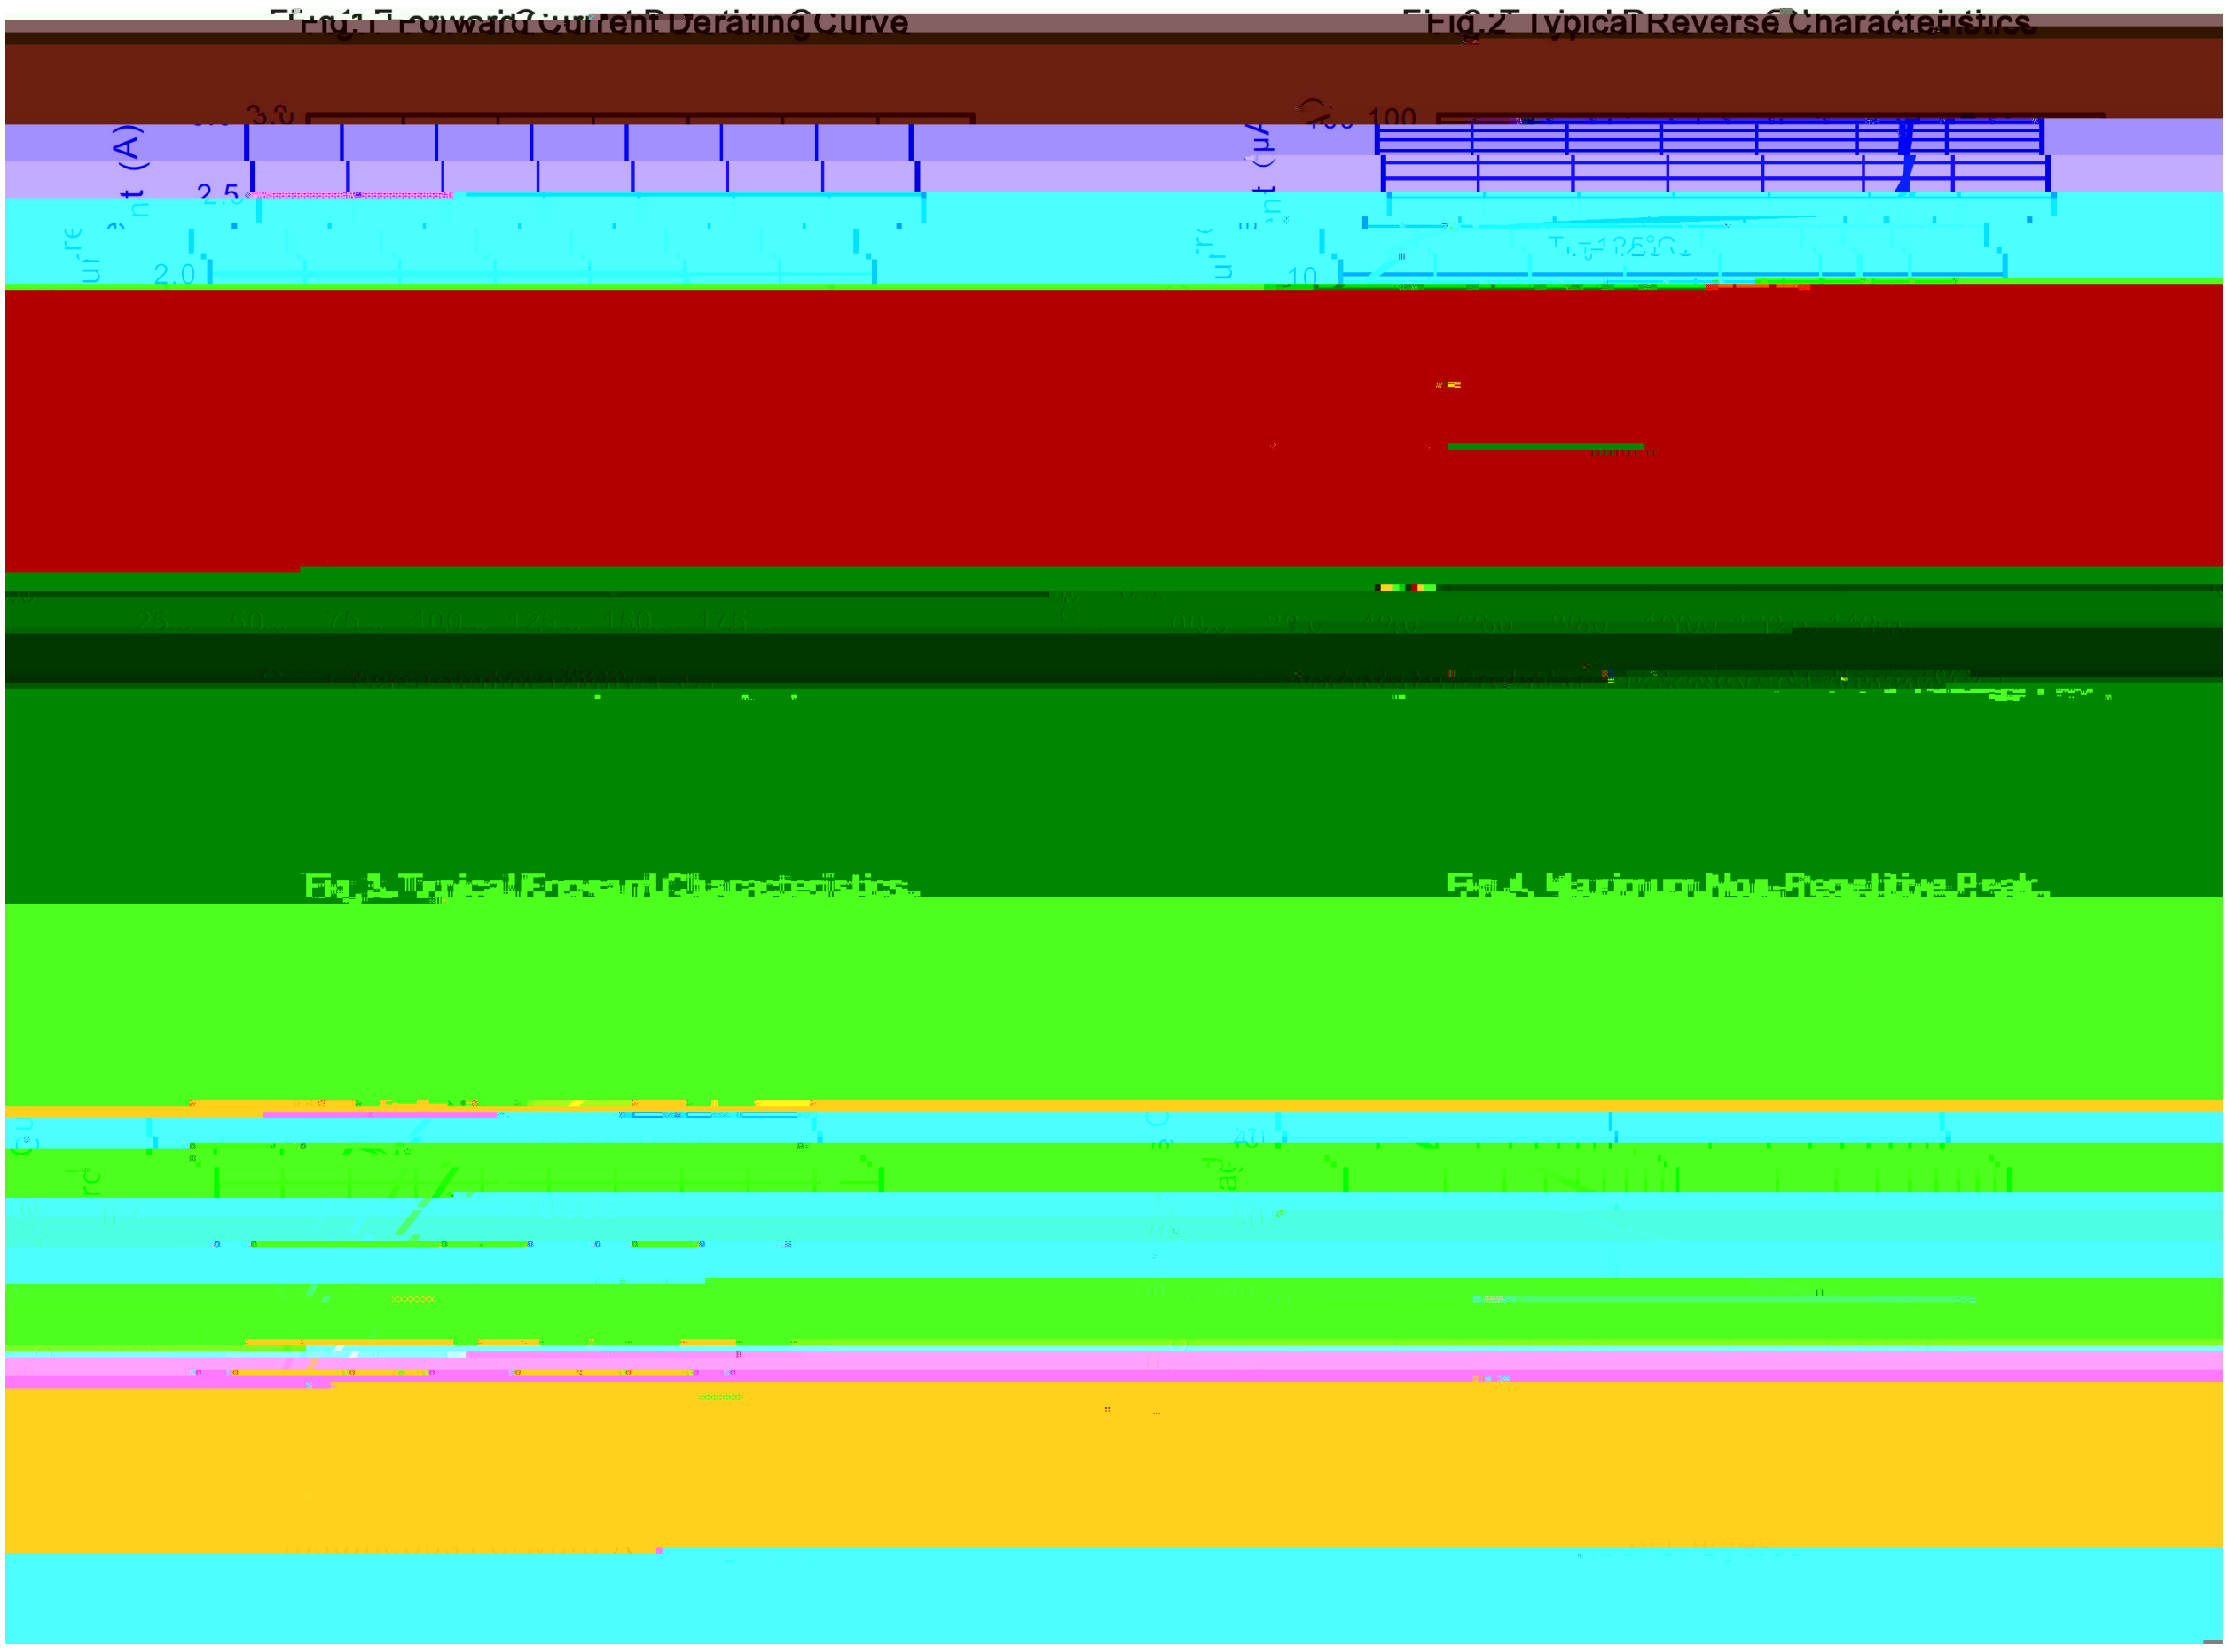
Fig.1 Forward Current Derating Curve
3.0
2.5
2.0
Current (A)
Fig.2 Typical Reverse Characteristics
100
10
Tj=125°C
Current (μA)
Fig.3 Typical Forward Characteristics
Fig.4 Maximum Non-Repetitive Peak

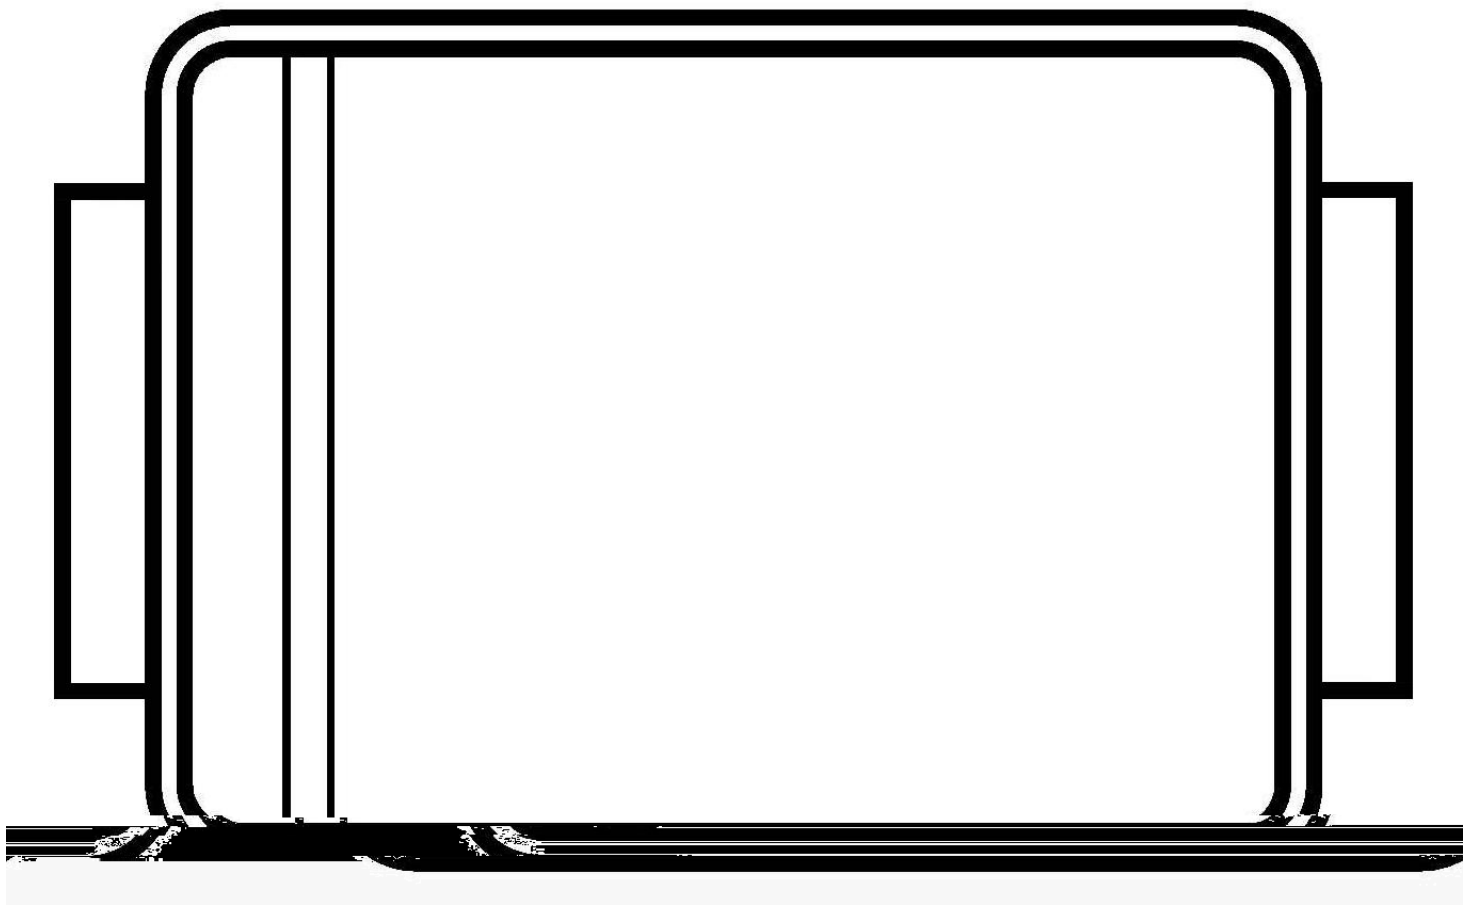

Temperature Profile for IR Reflow Soldering(Pb-Free)

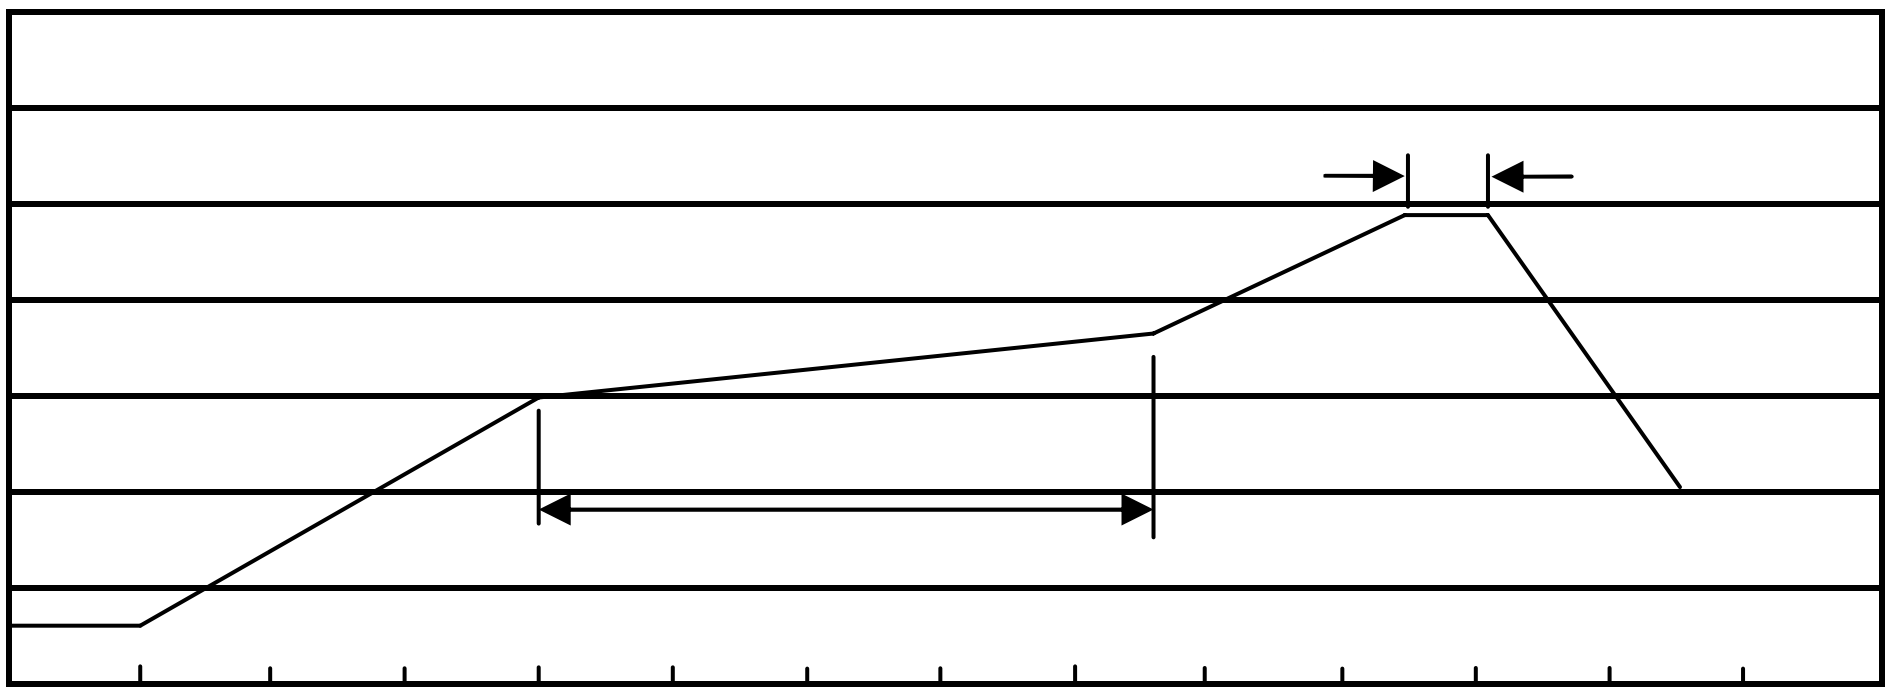

ب ˝ χ

ĺ ♬ □ ŷ Ḱ ɫ ı ˋH ȝ Ḱ ɫ

Š Ө □ ŷ ° ɫ ı ˋH ȝ ʽY ʎ ㎗ ° ° ɫ °

ì ˙ Ү ˛ ɔ ঌ ŷ ㎗ Ḱ ɫ ɫ

□ ŷ χ ° ɫ ˋH ȝ χ ° ° ɫ °

ɷ ˋ ɣ ŀ

	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]	[redacted]