


TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.






High P_C and I_C .

Medium power amplifier applications.




PIN1 Collector PIN 2 Base PIN 3 Emitter


See Marking Instructions.

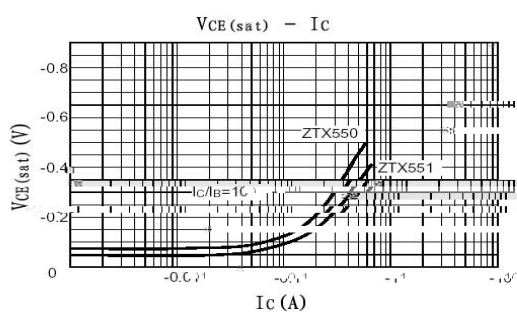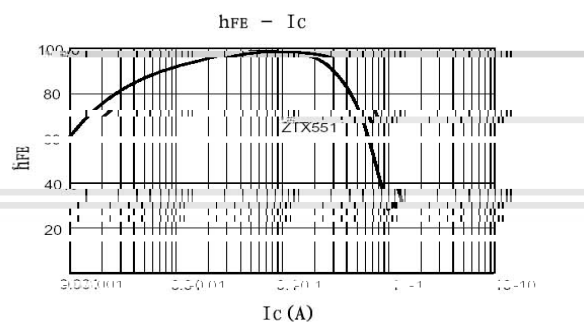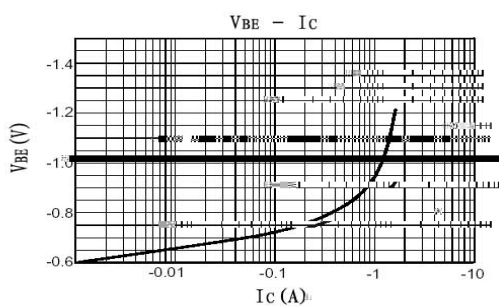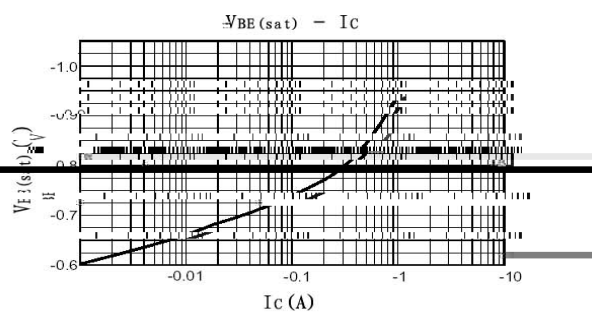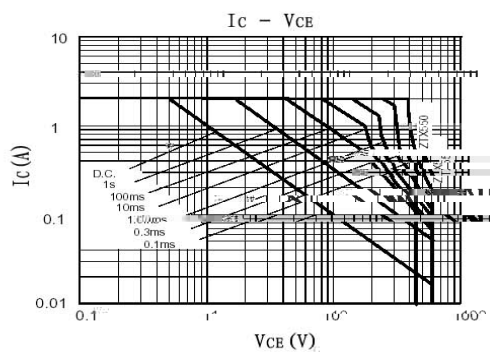

T0-92

Unit: mm

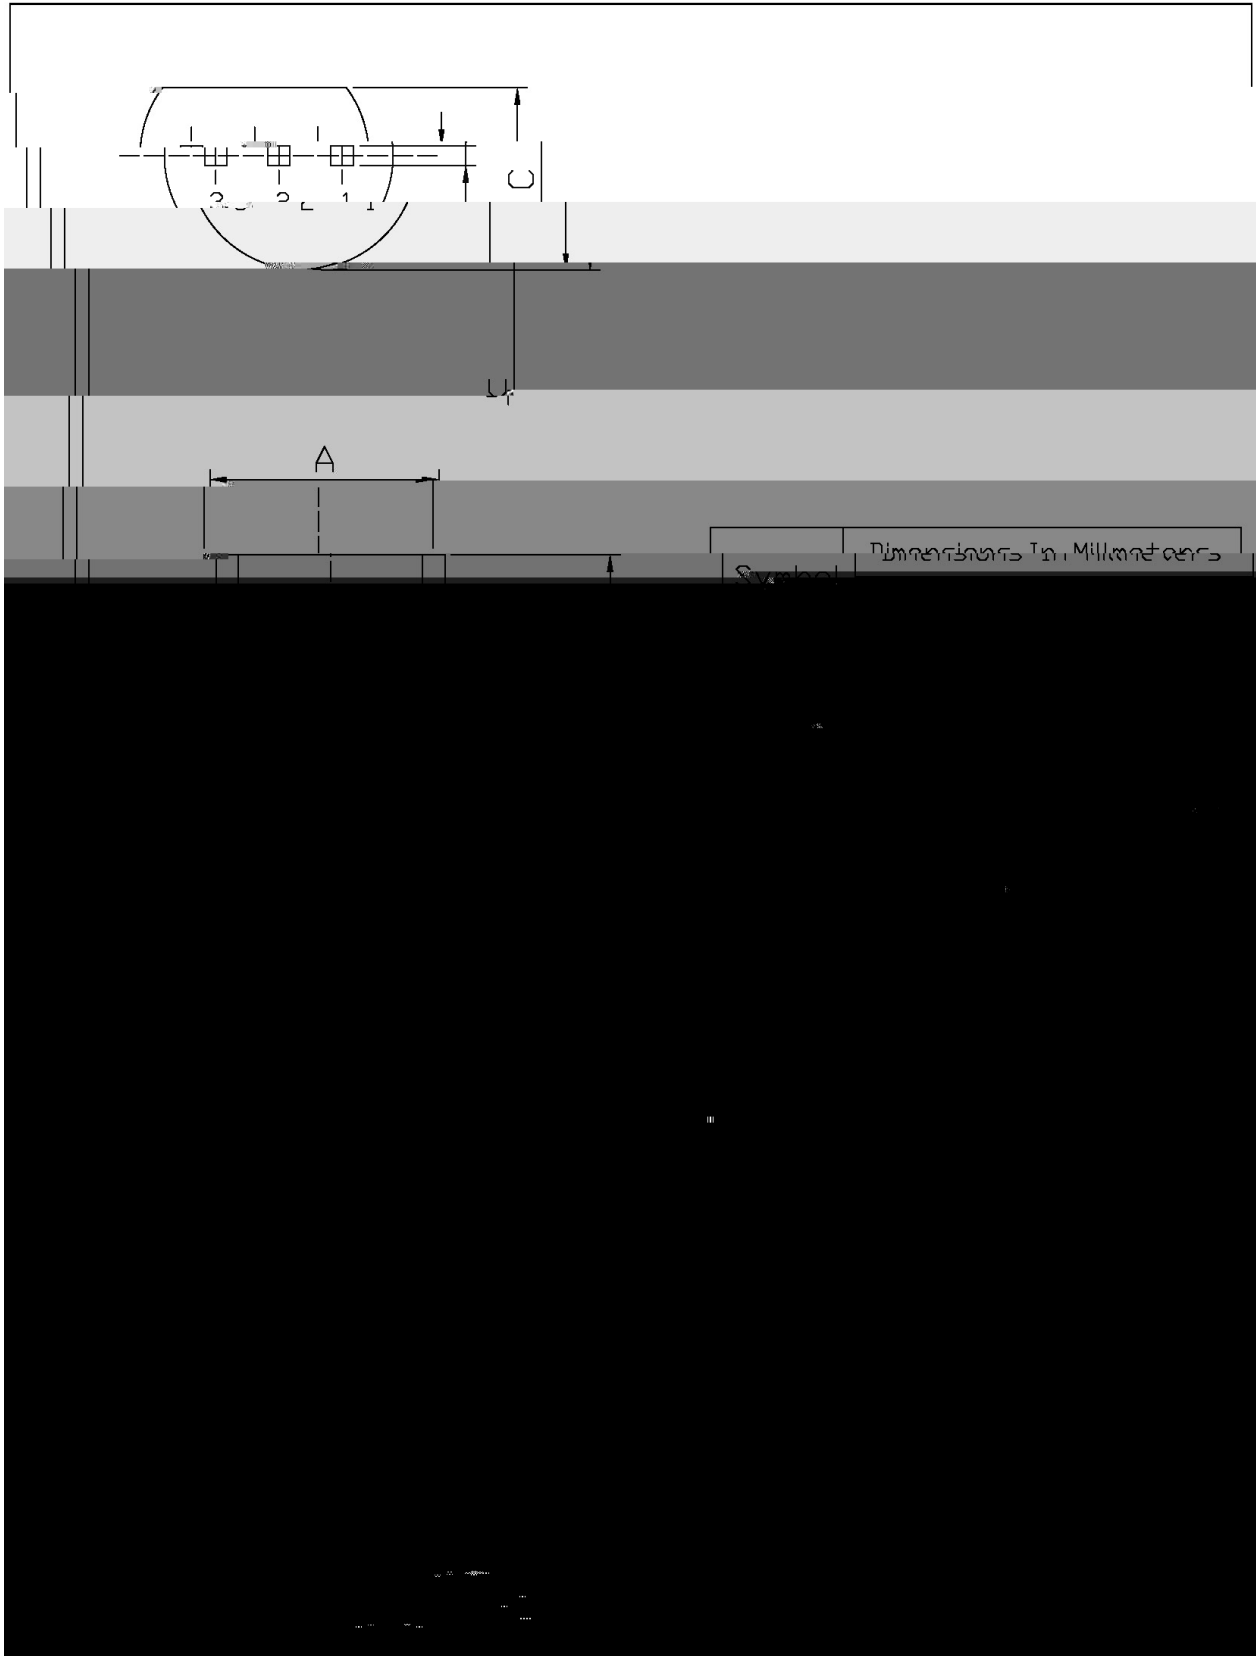

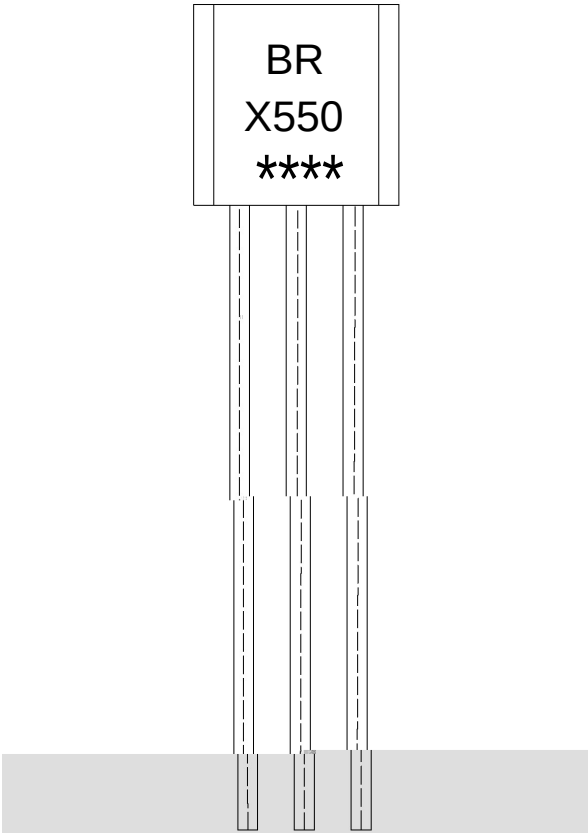

BR:

X550

Note:

BR:


X550:

****:

Company Code.

Product Type.

Lot No. Code,code change with Lot No.

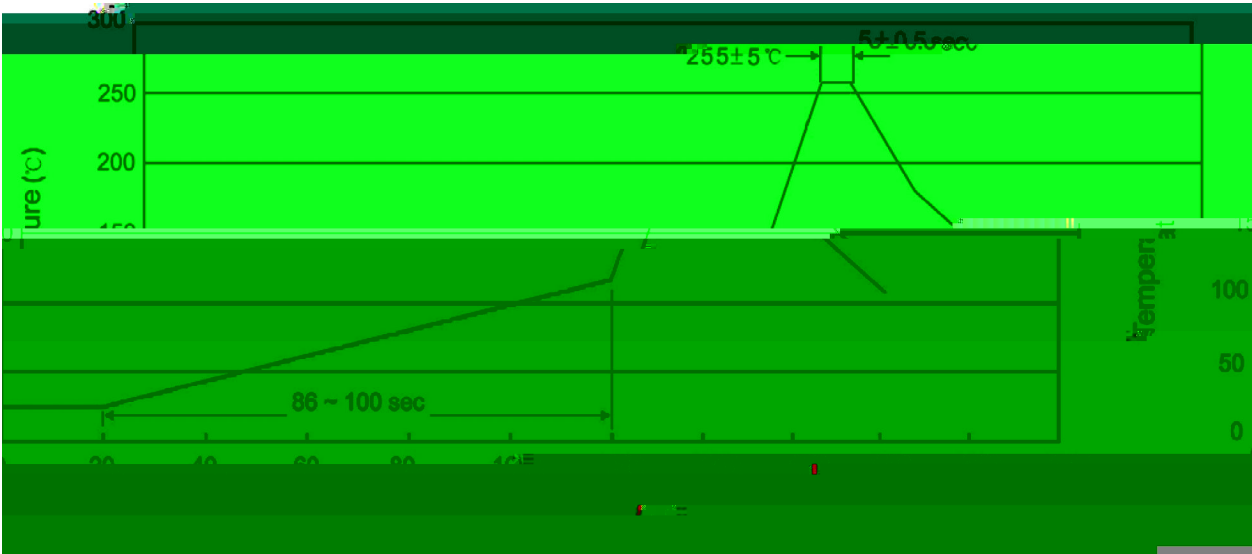

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ BULK

Package Type	Units					Dimension (unit mm3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type	Units			Dimension (unit mm3)
	Units/tape /	Tape/Inner Box /	Rows/Inner Box	