

BD235

Rev.E Mar.-2016

Silicon NPN transistor in a TO-126F Plastic Package.

Complementary pair with BD236.

BD235

Rev.E Mar.-2016




蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	60	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	2.0	A
Collector Current – Continuous(Pulse)	I_{CP}	6.0	A
Collector Power Dissipation	P_C	1.0	W


/ Electrical Characteristic Curve

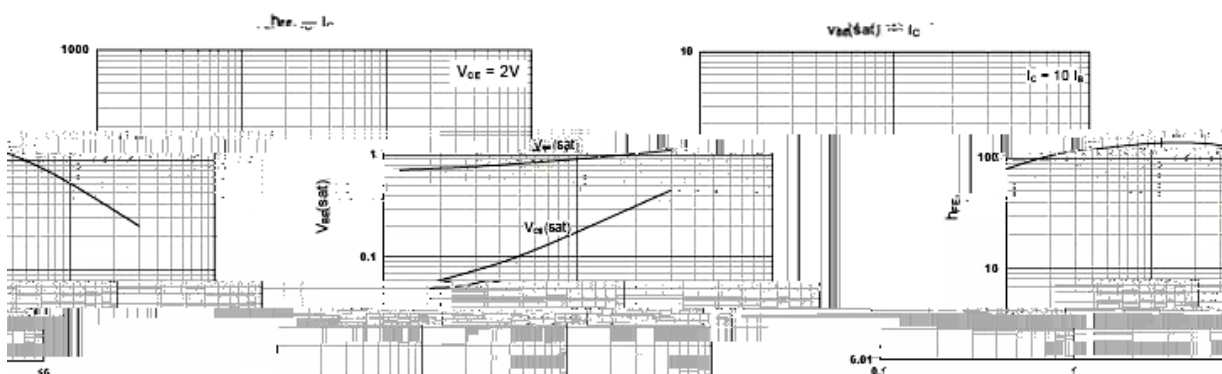

/ Package Dimensions


TU-126F

单位: mm

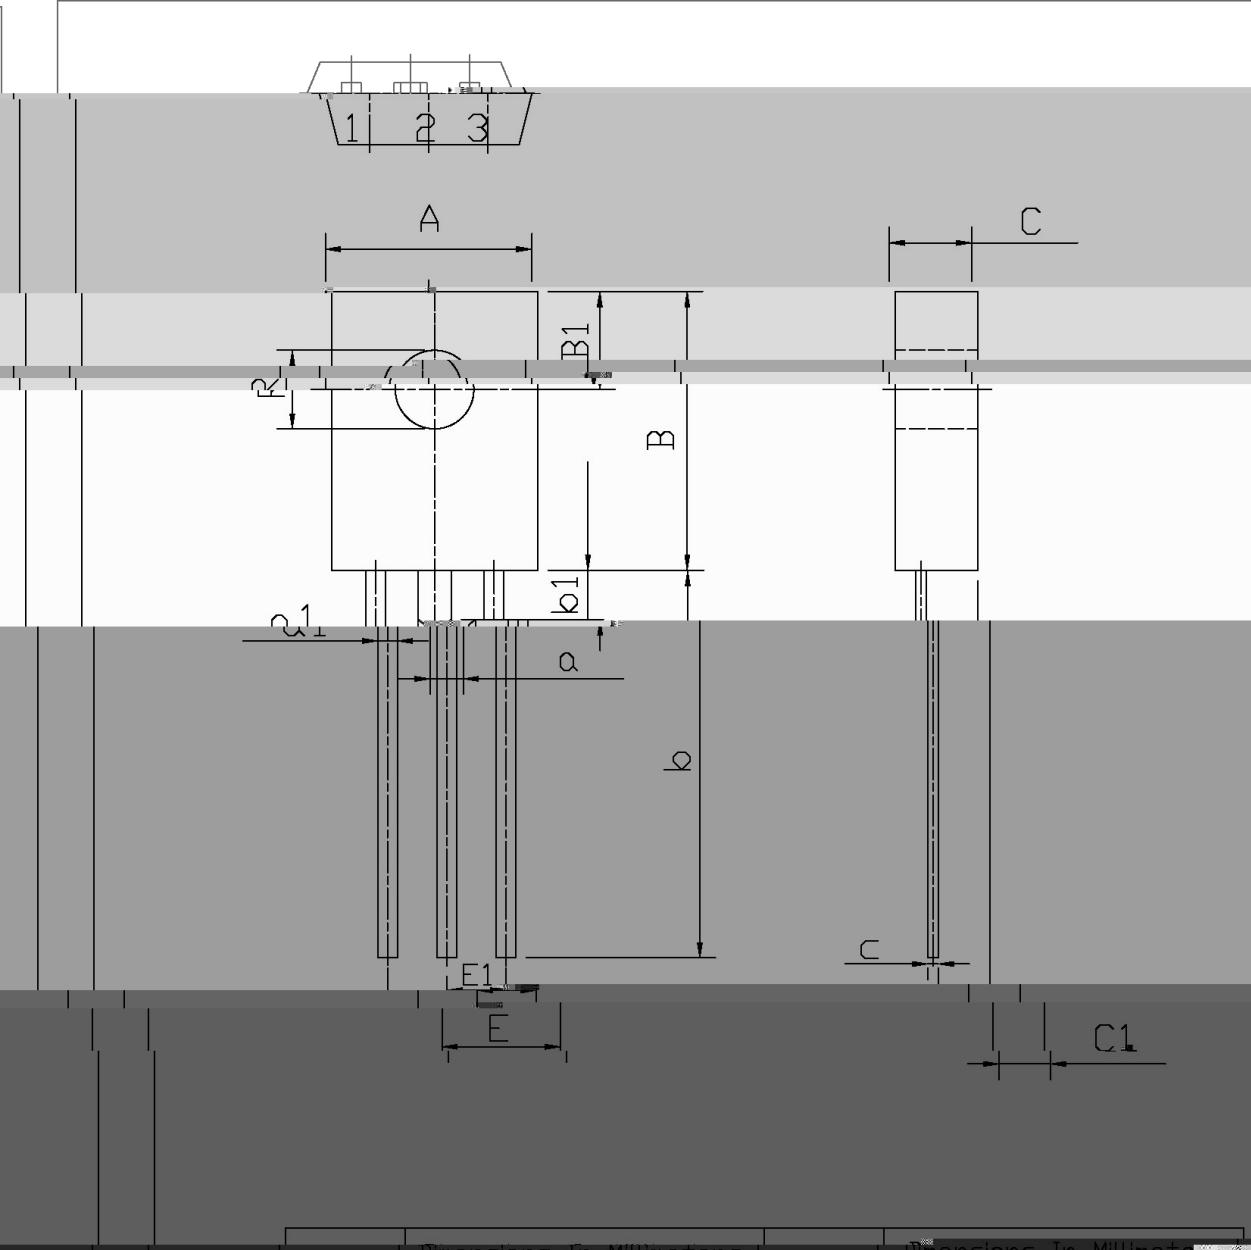

Max	Min	Max	Min
0.86	7.8	8.2	0.66

/ Marking Instructions

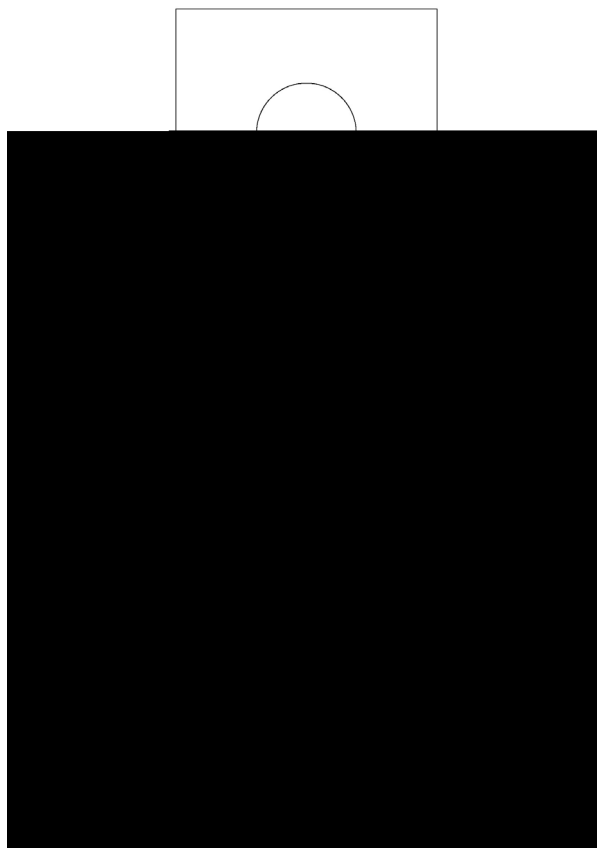


Note:

BR: Company Code

BD235: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

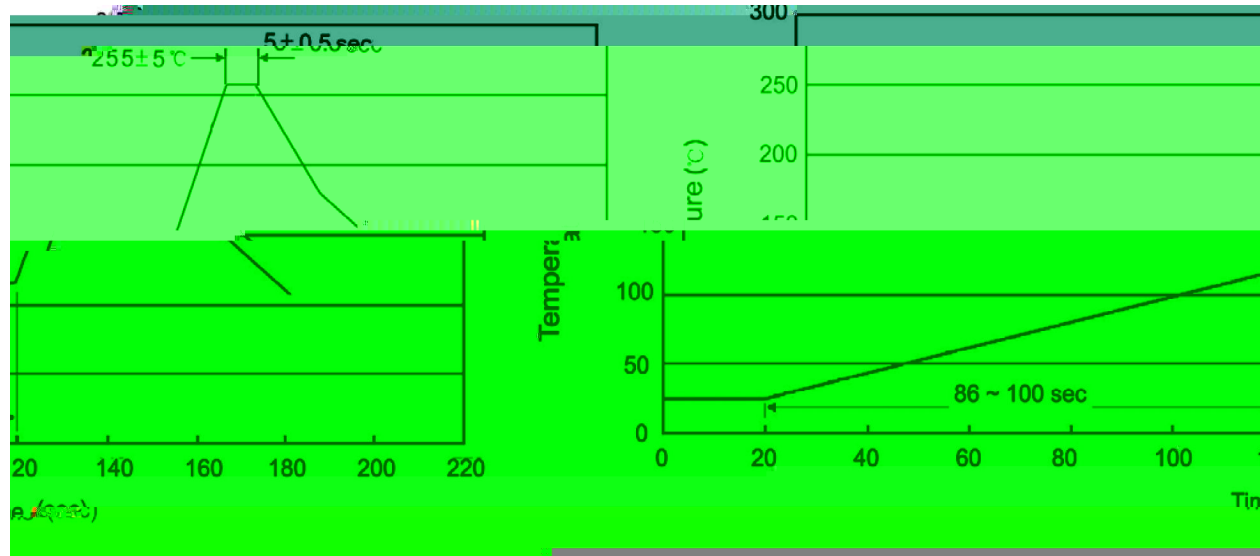

Note:

- 1

25 150

60 90sec;
- 2

255 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

270 5 10 1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	65	26	1,690	5	8,450	532×31×5.6	555×164×50	575×290×180

/ Notices